11-5895-833-34 p-2

ARMY
NAVY
AIR FORCE

TM 11-5895-833-34P-2
NAVELEX 0967-LP-550-1063
TO 31R5-2MSC46-4

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

NEWARK PUBLIC LIBRARY
FEB 6 1986
U. S. GOVT. PUBS.
DEPOSITORY 328

FOR

CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) (NSN 5895-00-100-4314) AND CV-3084A/MSC-46(V) (NSN 5895-00-614-9593)

DEPARTMENTS OF THE ARMY, THE NAVY AND THE AIR FORCE
18 NOVEMBER 1985

101.11:

READEX

Technical Manual
No. 11-5895-883-34P-2
Technical Manual
NAVELEX 0967-LP-550-1063
Technical Order
TO 31R5-2MSC46-4

*TM 11-5895-833-34P-2
NAVELEX 0967-LP-550-1063
TO 31R5-2MSC46-4

DEPARTMENTS OF THE ARMY,
THE NAVY, AND THE AIR FORCE
Washington, DC, 18 November 1985

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

FOR

CONVERTER, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V)(NSN 5895-00-100-4314) AND CV-3084A/MSC-46(V)(NSN 5895-00-614-9593)

Current as of 29 June 1984

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-ME-MP, Fort Monmouth, New Jersey 07703-5007.

For Air Force, submit AFTO Form 22 (Technical Order System Publication Improvement Report and Reply) in accordance with paragraph 6-5, Section VI, T.O. 00-5-1. Forward direct to prime ALC/MST.

For Navy, mail comments to the Commander, Naval Electronic Systems Command, ATTN: ELEX 8122, Washington, DC 20360.

In either case, a reply will be furnished direct to you.

TABLE OF CONTENTS

		Page	Illus Figure
Section I.	Introduction	1	
II.	Repair Parts List	5	
Group 06	Converters, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)	5	1
	Converters, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)	11	2
	Converters, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)	17	3
	0601 Cable Assembly, RF	21	4
	0602 Cable Assembly, RF	23	5
	0603 Cable Assembly, RF	25	6
	0604 Cable Assembly, RF	27	7
	0605 Filter, Phase Compensating (No Parts Authorized)		
	0606 Cable Assembly, RF	29	8
	0607 Cable Assembly, RF	31	9
	0608 Filter, Bandpass (No Parts Authorized)		
	0609 Cable Assembly, RF	33	10
	0610 IF Conversion Stripline Assembly	35	11
	0611 Cable Assembly, RF	37	12

*This manual supersedes TM 11-5895-833-34P-2, dated 14 September 1977 and all changes.

TABLE OF CONTENTS (CONT)

	Page	Illus Figure
0612 Cable Assembly, RF	39	13
0613 Wiring Harness, Interlock	41	14
0614 Cable Assembly, RF	43	15
0615 Filter, Band, Suppression (No Parts Authorized)		
0616 Wiring Harness, AC Prime Power	45	16
0617 Amplifier, Intermediate Frequency (No Parts Authorized)		
0618 Wiring Harness, Frequency Control	47	17
0619 Oscillator, Radio Frequency (No Parts Authorized)		
0620 Cable Assembly, RF	49	18
0621 Cable Assembly, RF	51	19
0622 Converter, Radio Frequency to Direct Current (No Parts Authorized)		
0623 Wiring Harness, Interconnection	53	20
0624 Cable Assembly, RF	55	21
0625 70 MHz Monitor Amplifier	57	22
062501 Circuit Card Assembly	59	23
0626 Amplitude Step Attenuator	63	24
062601 Circuit Card Assembly	63	24
062602 Circuit Card Assembly	63	24
062603 Circuit Card Assembly	63	24
062604 Circuit Card Assembly	64	24
0627 Microwave Assembly, RF	69	25
062701 RF Mixer	69	25
062702 Filter, Bandpass	70	25
062703 Filter, Bandpass	70	25
0628 Panel Assembly, Front	75	26
062801 IF Level Attenuator	79	27
06280101 Circuit Card Assembly	81	28
0629 70 MHz Detector	83	29
062901 Circuit Card Assembly	83	29
0630 Filter-Monitor Assembly	85	30
063001 Filter, Bandpass (No Parts Authorized)		
0631 Out-of-Lock Detector	87	31
0632 Status Indicator Calibrator	91	32
0633 Power Supply Assembly	93	33
063301 Power Supply (No Parts Authorized)		
0634 Cable Assembly, RF	95	34
0635 Cable Assembly, RF	97	35
0636 RF Phase-Locked Oscillator	99	36
063601 Circuit Card Assembly, RF Control (No Parts Authorized)		
063602 Circuit Card Assembly, Filter Network (No Parts Authorized)		
063603 Circuit Card Assembly, Phase Lock Control (No Parts Authorized)		
063604 Oscillator, RF (No Parts Authorized)		
063605 Frequency Multiplier (No Parts Authorized)		
0637 Wiring Harness, Oscillator	101	37
0638 Cable Assembly, RF	103	38

TABLE OF CONTENTS (CONT)

		Page	Illus Figure
	0639 Wiring Harness, Oscillator	105	39
	0640 Cable Assembly, RF	107	40
	0641 Circulator, Coaxial (No Parts Authorized)		
	0642 Attenuator, Fixed (No Parts Authorized)		
	0643 Amplifier, Intermediate Frequency (No Parts Authorized)		
Section III.	Special Tools List	109	
Group 30	Special Tools	109	41
Section IV	National Stock Number and Part Number Index	111	

SECTION I

INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of Direct Support and General Support Maintenance of the CV-3084/MSC-46(V) and CV-3084A/MSC-46(V). It authorizes requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. A list of special tools, special TMDE, and other special support equipment authorized by this RPSTL for the performance of maintenance.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	*Definition*
PA	—Item procured and stocked for anticipated or known usage.
PE	—Support equipment procured and stocked for initial use or outfitting to specified maintenance repair activities.
XB	—Item is not procured or stocked. If not available through salvage, requisition.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 750-1.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code	*Application/Explanation*
F	Support item is removed, replaced, used at the direct support level.
D	Support items that are removed, replaced, used at depot, mobile depot, specialized repair activity only.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	*Application/Explanation*
F	The lowest maintenance level capable of complete repair of the support item is the direct support level.
D	The lowest maintenance level capable of complete repair of the support item is the depot level.
Z	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability Code	*Definition*
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
F	Reparable item. When uneconomically reparable, condemn and dispose at the direct support level.
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.
A	Item requires special handling or condemnation procedures because of specific reasons (ie, precious metal content, high dollar value, critical material or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-41/42 which is used to identify the manufacturer, distributor, or Government agency, etc.

e. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item. In the Special Tools List, the initial basis of issue (BOI) appears as the last line in the entry for each special tool, special TMDE, and other special support equipment. When density of equipments supported exceeds density spread indicated in the basis of issue, the total authorization is increased accordingly.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable (e.g., shims, spacers, etc).

4. Special Information

a. Usable on codes are shown in the description column. Uncoded items are applicable to all models Identification of the usable on codes used in this publication are:

Code	*Used On*
CEP	CV-3084/MSC-46(V)
DAT	CV-3084A/MSC-46(V)

b. The following publications pertain to the CV-3084/MSC-46(V) and CV-3084A/MSC-46(V) and its components:

TM 11-5895-833-20P Frequency Conversion Subsystem for Satellite Communication Terminal AN/TSC-54
TM 11-5895-833-34-1 Frequency Conversion Subsystem for Satellite Communication Terminal AN/TSC-54
TM 11-5895-833-34-2 Converter, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)

c. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to Commander, US Army Communications-Electronics Command, ATTN: AMSEL-MM, Fort Monmouth, NJ 07703-5006 for the part required to support your equipment.

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings and divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

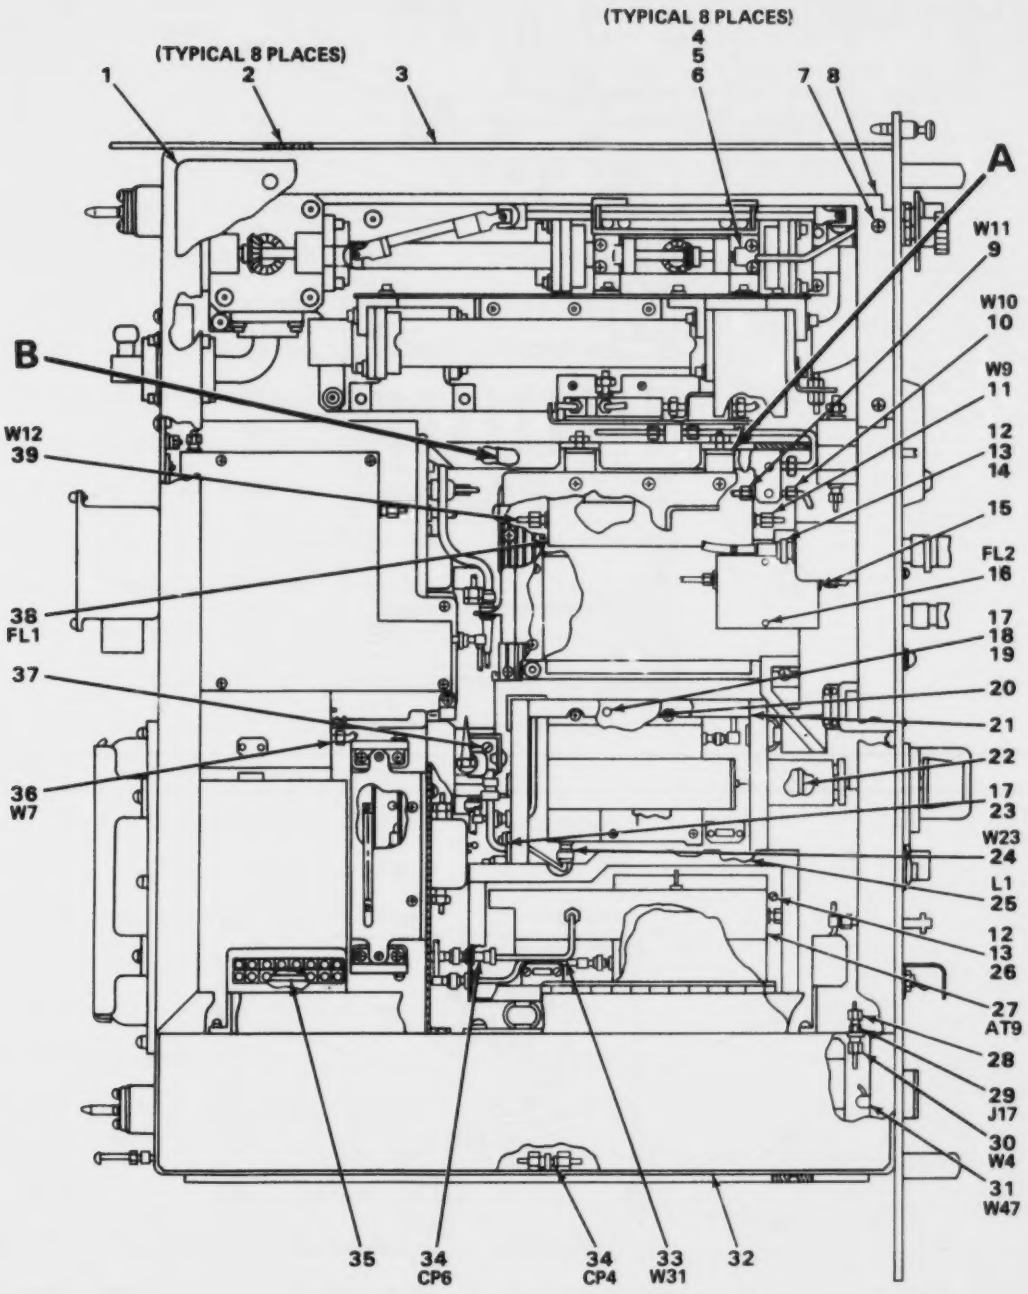

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2, 2A3 OR 2A4

EL0JE001

FIGURE 1. CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) AND CV-3084A/MSC-46(V)(SHEET 1 OF 2).

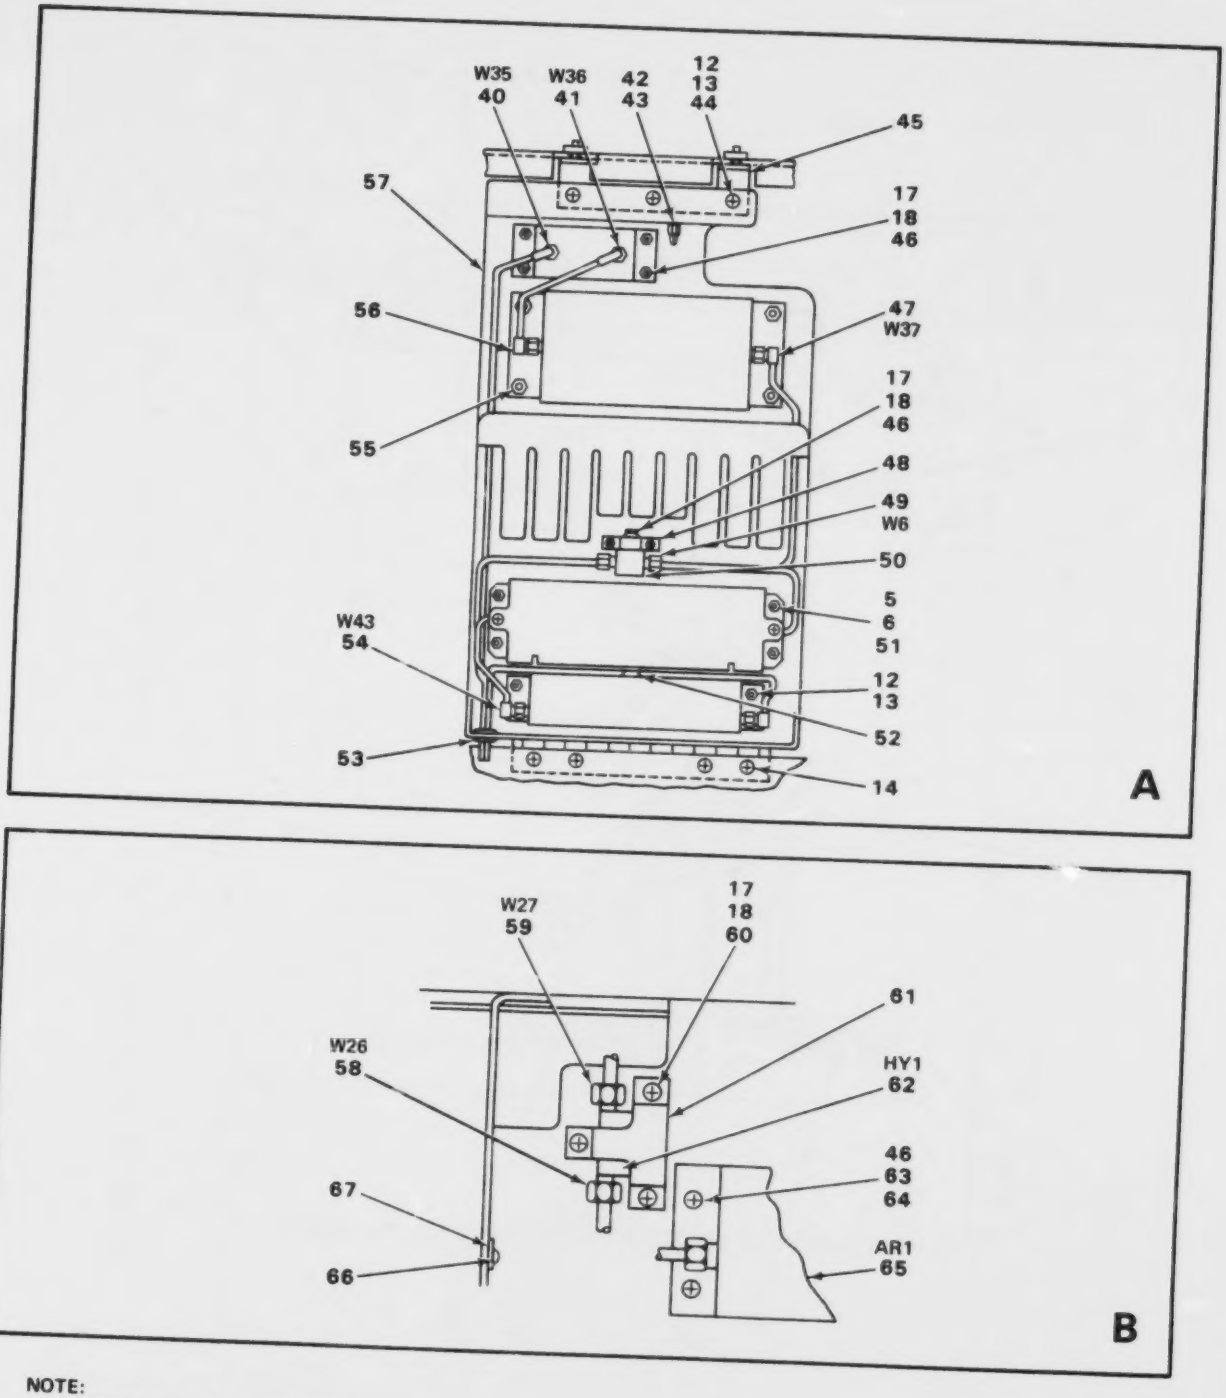

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2, 2A3 OR 2A4

EL0JE002

FIGURE 1. CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) AND CV-3084A/MSC-46(V)(SHEET 2 OF 2).

REPAIR PARTS LIST

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 06 CONVERTER, FREQUENCY, ELECTRONIC CV3084/MSC-46(V)AND CONVERTER, FREQUENCY, ELECTRONIC CV-3084A/MSC-46(V)		
1	1	XBFZZ		80063	SM-D-753679	COVER,ACCESS TOP	EA	1
1	2	PAFZZ	5305-00-088-9666	96906	MS24693C51	SCREW,MACHINE	EA	8
1	3	XBFZZ		80063	SM-D-753262-1	SLIDE,DRAWER EXTENS	EA	1
1	4	PAFZZ	5305-00-054-6652	96906	MS51957-28	SCREW,MACHINE	EA	8
1	5	PAFZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	12
1	6	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT	EA	12
1	7	PAFZZ	5305-00-066-7328	96906	MS24693C27	SCREW,MACHINE	EA	2
1	8	XBFZZ		80063	SM-D-754149	SUPPORT,SHLDNG GSKT	EA	1
1	9	PAFZZ	5995-01-011-7423	80063	SM-C-753917	CABLE ASSY,RAD FREQ	EA	1
1	10	PAFZZ	5995-01-011-7424	80063	SM-C-753916	CABLE ASSY,RAD FREQ CEP	EA	1
1	11	PAFZZ	5995-01-011-7425	80063	SM-C-753915	CABLE ASSY,RAD FREQ	EA	1
1	12	PAFZZ	5310-00-933-8119	96906	MS35338-137	WASHER,LOCK	EA	V
1	13	PAFZZ	5310-00-880-5978	96906	MS15795-807	WASHER,FLAT	EA	V
1	14	PAFZZ	5305-00-079-5835	96906	MS24693C50	SCREW,MACHINE	EA	V
1	15	XBFZZ		80063	SM-B-753765	RETAINER,FILTER CEP	EA	1
1	16	PAFDA	5915-01-150-0757	31196	1130000041	FILTER,BANDPASS	FT	1
1	17	PAFZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	V
1	18	PAFZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	V
1	19	PAFZZ	5305-00-054-5650	96906	MS51957-16	SCREW,MACHINE	EA	V
1	20	XBFZZ		80063	SM-F-754491	COVER,ENCLOSURE	EA	1
1	21	XBFZZ		80063	SM-D-754292	SHLDNG GSKT ELECTRN	EA	1
1	22	XBFZZ		29940	3CCF23E	CHAIN	EA	1
1	23	PAFZZ	5305-00-054-5648	96906	MS51957-14	SCREW,MACHINE	EA	V
1	24	PAFZZ	5995-01-012-3635	80063	SM-C-754357	CABLE ASSY RAD FREQ	EA	1
1	25	PAFZZ	5950-00-645-3771	76493	4624	CHOKE,RADIO FREQUEN	EA	1
1	26	PAFZZ	5305-00-054-6667	96906	MS51957-42	SCREW,MACHINE	EA	2

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
1	27	XBFDD		80063	SM-D-753702	ATTENUATOR ASSEMBLY (SEE FIGURE 24 FOR BREAKDOWN)..	EA	1
1	28	XBFFF		80063	SM-B-753911	CABLE ASSY RAD FREQ (SEE FIGURE 12 FOR BREAKDOWN)..	EA	1
1	29	PAFZZ	5915-01-004-9318	26805	2056-6200-02	FILTER,RADIO.....	EA	1
1	30	XBFFF		80063	SM-B-753910	CABLE ASSY RAD FREQ (SEE FIGURE 13 FOR BREAKDOWN)..	EA	1
1	31	XBFFF		80063	SM-D-754117	WIRING HRNS INTRLCK (SEE FIGURE 14 FOR BREAKDOWN)..	EA	1
1	32	XBFZZ		80063	SM-D-753667	COVER,ACCESS,EQUAL.....	EA	1
1	33	PAFZZ	5995-01-012-3637	80063	SM-C-754358	CABLE ASSY RAD FREQ.....	EA	1
1	34	PAFZZ	5935-00-337-6770	26805	2084-0000-02	ADAPTER,CONNECTOR.....	EA	2
1	35	PAFZZ	5310-00-298-8157	82423	53453	STRAP,JUMPER.....	EA	4
1	36	PAFFF	5995-01-099-3472	80063	SM-B-753913	CABLE ASSY RAD FREQ (SEE FIGURE 15 FOR BREAKDOWN)..	EA	1
1	37	XBFZZ		80063	SM-C-754347	BRACKET,STRAP.....	EA	1
1	38	XBFDA		31196	1130000414	FILTER,BAND,SUPRSON.....	EA	1
1	39	PAFZZ	5995-01-011-7426	80063	SM-C-753918	CABLE ASSY,RAD FREQ.....	EA	1
1	40	PAFFF	5995-01-004-1892	80063	SM-B-753938	CABLE ASSY,RAD FREQ (SEE FIGURE 4 FOR BREAKDOWN)...	EA	1
1	41	XBFFF		80063	SM-B-753939	CABLE ASSY,RAD FREQ (SEE FIGURE 5 FOR BREAKDOWN)...	EA	1
1	42	PAFZZ	5310-00-982-5030	96906	MS35425-17	NUT,WING,PLAIN.....	EA	1
1	43	XBFZZ		80063	SM-B-753851	WRENCH,OPEN END.....	EA	1
1	44	PAFZZ	5305-00-054-6670	96906	MS51957-45	SCREW,MACHINE.....	EA	13
1	45	XBFZZ		80063	SM-C-753669	BRACKET,SHELF.....	EA	1
1	46	PAFZZ	5305-00-054-5651	96906	MS51957-17	SCREW,MACHINE.....	EA	7
1	47	PAFFF	5995-01-053-5919	80063	SM-B-754545	CABLE ASSY,RAD FREQ (SEE FIGURE 6 FOR BREAKDOWN)...	EA	1
1	48	XBFZZ		80063	SM-C-754543	BRACKET,DIRECTNL.....	EA	1
1	49	XBFFF		80063	SM-B-753912	CABLE ASSY,RAD FREQ (SEE FIGURE 7 FOR BREAKDOWN)...	EA	1
1	50	PAFZZ	5985-00-124-5119	32252	0D3-10-137	COUPLER,DIRECTIONAL.....	EA	1
1	51	PAFZZ	5310-00-934-9761	96906	MS35649-264	NUT,PLAIN HEXAGON.....	EA	4
1	52	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN.....	EA	8
1	53	PAFZZ		96906	MS35487-6	GROMMET,RUBBER.....	EA	2
1	54	XBFFF		80063	SM-B-753944	CABLE ASSY RAD FREQ (SEE FIGURE 8 FOR BREAKDOWN)...	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
1	55	PAFZZ	5310-00-413-6059	50392	58FK832	NUT,SELF LOCKING,HE.....	EA	4
1	56	PAFDA	5895-00-124-5105	80063	SM-C-753575	AMPLIFIER,IF (SEE FIGURE 22 FOR BREAKDOWN).....	EA	1
1	57	XBFZZ		80063	SM-F-754540	TRAY,SUPPORT HINGED.....	EA	1
1	58	PAFZZ	5995-01-011-7421	80063	SM-C-753929	CABLE ASSY,RAD FREQ.....	EA	1
1	59	PAFZZ	5995-01-011-7420	80063	SM-C-753930	CABLE ASSY,RAD FREQ.....	EA	1
1	60	PAFZZ	5305-00-054-5647	96906	MS51957-13	SCREW,MACHINE.....	EA	3
1	61	XBFZZ		80063	SM-B-753733	BRKT,CLAMP,CIRCULTR.....	EA	1
1	62	PAFZZ	5985-01-143-1951	14830	1CXL16	CIRCULATOR,COAXIAL.....	EA	1
1	63	PAFZZ	5310-00-934-9748	96906	MS35649-244	NUT,PLAIN HEXAGON.....	EA	6
1	64	PAFZZ	5305-00-054-6653	96906	MS51957-29	SCREW,MACHINE.....	EA	4
1	65	PAFDA	5895-00-014-7776	34874	LNA700/1259	AMPLIFIER,IF.....CEP	EA	1
1	66	PAFZZ	5305-00-922-8778	96906	MS35275-203	SCREW,MACHINE.....	EA	2
1	67	PAFZZ	5340-00-793-0543	06229	CON0	CLAMP,LOOP.....	EA	2

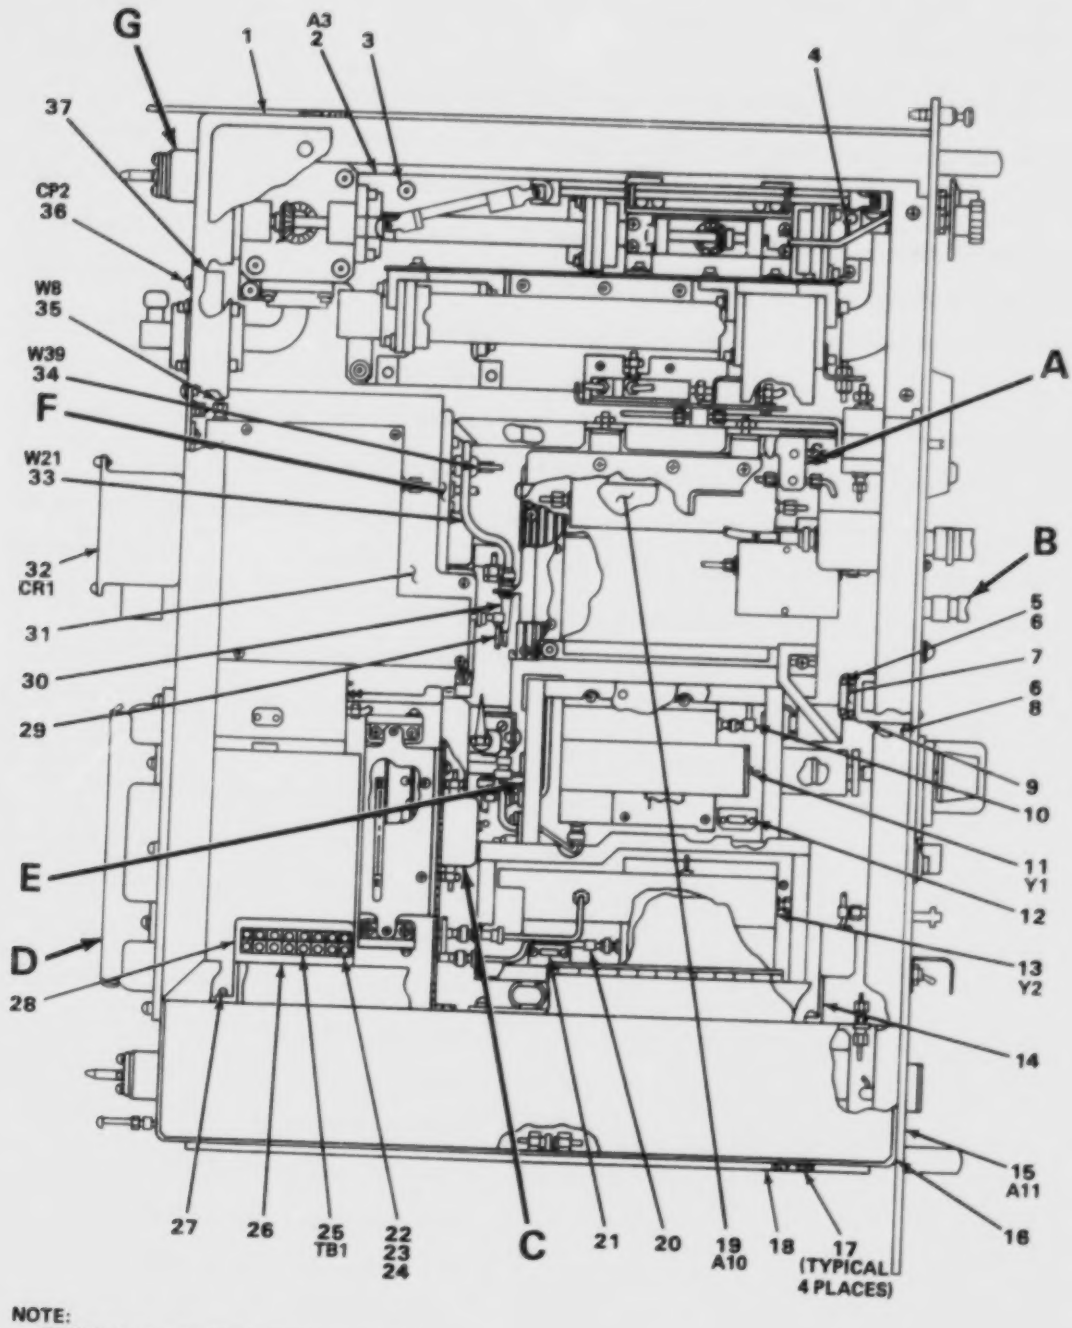

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2, 2A3 OR 2A4

EL0JE003

FIGURE 2. CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) AND CV-3084A/MSC-46(V)(SHEET 1 OF 3).

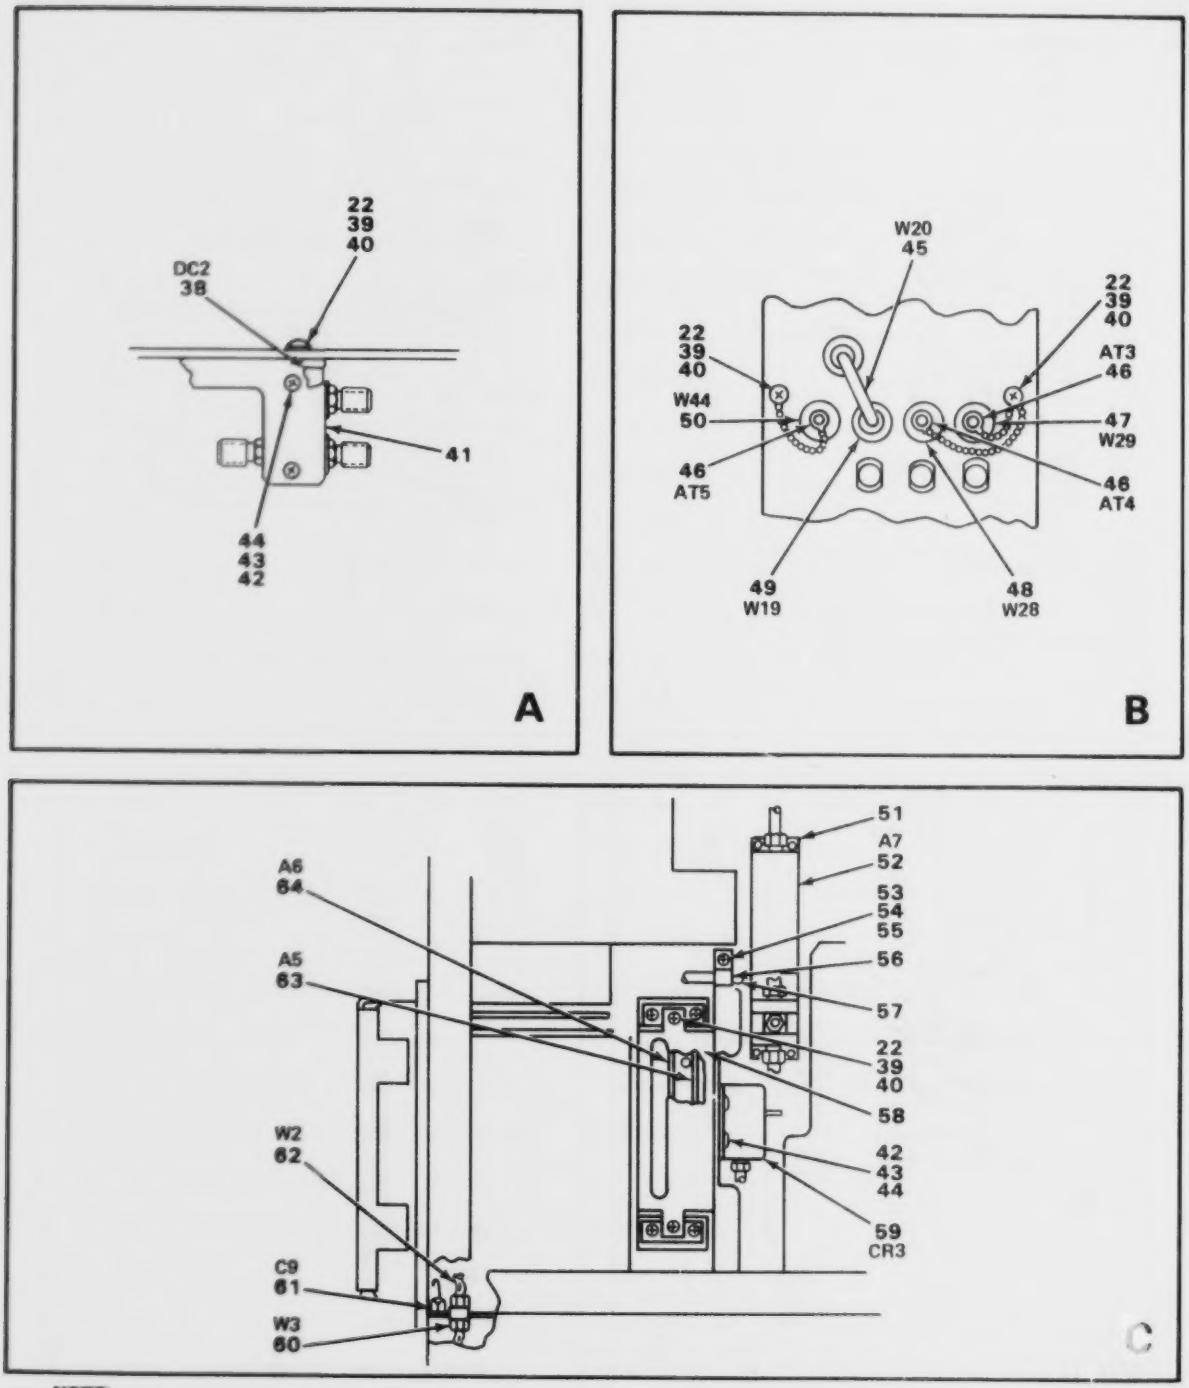

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2, 2A3 OR 2A4

ELOJE004

FIGURE 2. CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) AND CV-3084A/MSC-46(V)(SHEET 2 OF 3).

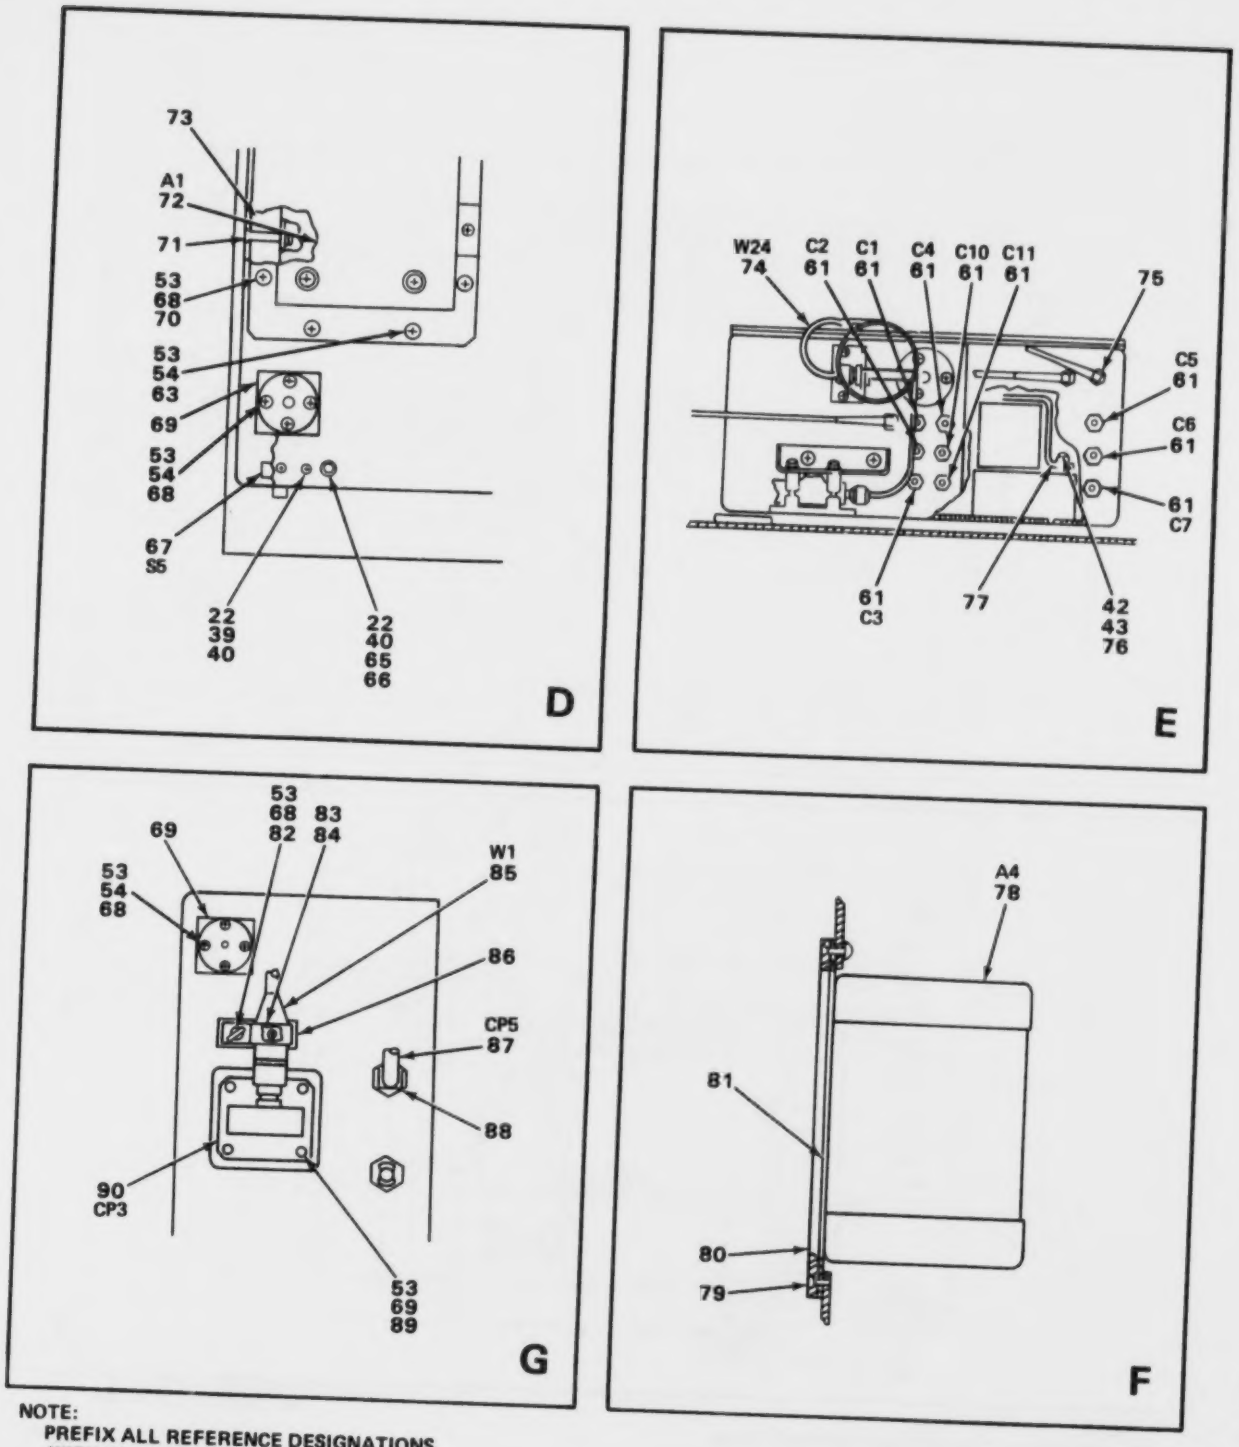

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2, 2A3 OR 2A4

EL0JE005

FIGURE 2. CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) AND CV-3084A/MSC-46(V)(SHEET 3 OF 3).

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	1	XBFZZ		80063	SM-E-753844	CHASSIS,ELEC EQUIP	EA	4
2	2	PAFDD	5985-00-124-5247	80063	SM-D-753719	MCROWVE ASSY RAD FR (SEE FIGURE 25 FOR BREAKDOWN)	EA	1
2	3	PAFZZ	5305-00-088-9666	96906	MS24693C51	SCREW,MACHINE	EA	4
2	4	XBFZZ		80063	SM-B-753819-1	SHAFT,DRIVE FLXIBLE	EA	1
2	5	PAFZZ	5305-00-054-5642	96906	MS51957-8	SCREW,MACHINE	EA	18
2	6	PAFZZ	5310-00-595-6761	96906	MS15795-802	WASHER,FLAT	EA	18
2	7	XBFFF		80063	SM-F-753859	WIRING HRNS FREQ CL (SEE FIGURE 17 FOR BREAKDOWN)	EA	1
2	8	PAFZZ	5305-00-054-5638	96906	MS51957-4	SCREW,MACHINE	EA	4
2	9	XBFZZ		80063	SM-C-753494	BRKT CONNECTOR	EA	1
2	10	XBFFF		80063	SM-B-754355	CABLE ASSY,RAD FREQ (SEE FIGURE 35 FOR BREAKDOWN)	EA	1
2	11	XBFDA		80063	SM-D-754-367-1	OSCILLATOR,RF (SEE FIGURE 36 FOR BREAKDOWN)	EA	1
2	12	PAFDA	5895-00-014-7845	80063	SM-D-754372	OSCILLATOR,RAD FRQ	EA	1
2	13	XBFFF		80063	SM-D-754370	WIRING HRNS,OSCILLA (SEE FIGURE 37 FOR BREAKDOWN)	EA	1
2	14	XBFZZ		80063	SM-C-753658	GUARD,SAFETY	EA	1
2	15	XBFFF		80063	SM-E-753687	PANEL ASSY,FRONT (SEE FIGURE 26 FOR BREAKDOWN)	EA	1
2	16	XBFZZ		80063	SM-B-753285	SHLDNG GSKT,ELCTRON	EA	1
2	17	PAFZZ	5305-00-043-0267	96906	MS24693C274	SCREW,MACHINE	EA	4
2	18	XBFZZ		80063	SM-D-753263-1	SLIDE,DRAWED EXTENS	EA	1
2	19	PAFDA	5895-01-021-5915	80063	SM-C-753497	DETECTOR,RADIO FREQ (SEE FIGURE 29 FOR BREAKDOWN)	EA	1
2	20	XBFFF		80063	SM-C-754333-4	CABLE ASSY RAD FREQ (SEE FIGURE 38 FOR BREAKDOWN)	EA	1
2	21	XBFFF		80063	SM-D-754371	WIRING HARNESS,OSC (SEE FIGURE 39 FOR BREAKDOWN)	EA	1
2	22	PAFZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	V
2	23	PAFZZ	5310-00-616-8660	80205	NAS671C6	NUT,PLAIN HEXAGON	EA	4
2	24	PAFZZ	5310-00-773-7624	80205	NAS620C6	WASHER,FLAT	EA	6
2	25	XBFZZ		75382	37TB6	TERMINAL BOARD	EA	1
2	26	XBFZZ		75382	MS600-6GEE	MARKER STRIP	EA	1
2	27	PAFZZ	5305-00-958-2918	96906	MS24693C26	SCREW,MACHINE	EA	2
2	28	XBFZZ		80063	SM-C-753685	BRKT,TRMNL BRD SUPP	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	29	XBFFF		80063	SM-B-754356	CABLE ASSY,RF (SEE FIGURE 40 FOR BREAKDOWN).....	EA	1
2	30	XBFFF		80063	SM-B-754385	CABLE ASSY,RF (SEE FIGURE 34 FOR BREAKDOWN).....	EA	1
2	31	XBFZZ		80063	SM-D-753649	BRKT,SUPPRT,FILTER.....	EA	1
2	32	PAFDA	5985-00-124-4795	31196	1130000045	IF CONVERSION (SEE FIGURE 11 FOR BREAKDOWN).....	EA	1
2	33	PAFZZ	5995-01-011-7417	80063	SM-D-753924	CABLE ASSY RAD FREQ.....	EA	1
2	34	XBFZZ		04901	42AS3-6	WRING HRNS BRANCHED.....	EA	1
2	35	XBFZZ		80063	SM-D-753914	CABLE ASSY RAD FREQ.....	EA	1
2	36	PAFZZ	5985-01-017-7097	80063	SM-C-753319	ADAPTER,WAVEGUIDE.....	EA	1
2	37	XBFZZ		18565	10-00-2230-1224	SHLDNG GSKT ELCTRON.....	EA	1
2	38	XBFZZ		32252	OD3-20-136	COUPLER DIRECTIONAL.....	EA	1
2	39	PAFZZ	5305-00-054-6652	96906	MS51957-28	SCREW,MACHINE.....	EA	4
2	40	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT.....	EA	V
2	41	XBFZZ		80063	SM-B-753682	BRACKET,ANGLE.....	EA	1
2	42	PAFZZ	5305-00-054-5648	96906	MS51957-14	SCREW,MACHINE.....	EA	V
2	43	PAFZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK.....	EA	V
2	44	PAFZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT.....	EA	V
2	45	PAFZZ	5995-01-011-7427	80063	SM-B-753923	CABLE ASSY,RAD FREQ.....	EA	1
2	46	PAFZZ	5940-01-004-1893	00929	TAE30	TERMINATION,COAXIAL.....	EA	3
2	47	PAFZZ	5995-01-011-7415	80063	SM-D-753932	CABLE ASSY,RAD FREQ.....	EA	1
2	48	PAFZZ	5995-01-011-7416	80063	SM-D-753931	CABLE ASSY,RAD FREQ.....	EA	1
2	49	PAFZZ	5995-01-011-7422	80063	SM-C-753922	CABLE ASSY RAD FREQ.....	EA	1
2	50	PAFZZ	5995-01-011-7419	80063	SM-C-753945	CABLE ASSY RAD FREQ.....	EA	1
2	51	PAFZZ	5305-00-066-7328	96906	MS24693C27	SCREW,MACHINE.....	EA	2
2	52	PAFDD	5895-00-124-5257	80063	SM-C-753721	FILTER,MONITOR ASSY (SEE FIGURE 30 FOR BREAKDOWN)..	EA	1
2	53	PAFZZ	5310-00-933-8119	96906	MS35338-137	WASHER,LOCK.....	EA	44
2	54	PAFZZ	5305-00-054-6671	96906	MS51957-46	SCREW,MACHINE.....	EA	11
2	55	PAFZZ	5310-00-069-5291	80205	NAS620C8	WASHER,FLAT.....	EA	5
2	56	XBFZZ		97987	1-4-5	CLAMP,CABLE SUPPORT.....	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	57	XBFFF		80063	SM-F-753867	WIRING HARNESS,INTR (SEE FIGURE 20 FOR BREAKDOWN)..	EA	1
2	58	XBFZZ		80063	SM-C-753654	COVER,CIRCUIT CD RT.....	EA	1
2	59	PAFZZ	6625-00-124-5269	12598	M2158	MONITOR,RAD FREQ.....	EA	1
2	60	XBFFF		80063	SM-B-7530909	CABLE ASSY RAD FREQ (SEE FIGURE 21 FOR BREAKDOWN)..	EA	1
2	61	PAFZZ	5910-00-852-7099	81349	CK70AX471K	CAPACITOR,FIXED.....	EA	11
2	62	XBFFF		80063	SM-B-753908	CABLE ASSY RAD FREQ (SEE FIGURE 9 FOR BREAKDOWN)...	EA	1
2	63	XBFDA		80063	SM-D-952556-1	CIRC CD ASSY (SEE FIGURE 31 FOR BREAKDOWN).....	EA	1
2	64	PAFDA	5999-00-124-5264	80063	SM-D-753436	CIRC CD ASSY (SEE FIGURE 32 FOR BREAKDOWN).....	EA	1
2	65	PAFZZ	5305-00-054-6660	96906	MS51957-36	SCREW,MACHINE.....	EA	1
2	66	PAFZZ	5310-00-934-9761	96906	MS35649-264	NUT,PLAIN HEXAGON.....	EA	5
2	67	XBFZZ		81349	MIL58805-56-1	SWITCH,INTERLOCK.....	EA	1
2	68	PAFZZ	5310-00-880-5978	96906	MS15795-807	WASHER,FLAT.....	EA	V
2	69	XBFZZ		80063	SM-B-753676	PIN,FLANGED,SHOCK.....	EA	2
2	70	PAFZZ	5305-00-054-6670	96906	MS51957-45	SCREW,MACHINE.....	EA	13
2	71	PAFZZ	5305-00-088-9670	96906	MS24693C53	SCREW,MACHINE.....	EA	9
2	72	XBFDA		80063	SM-D-753692	POWER SUPPLY ASSY (SEE FIGURE 33 FOR BREAKDOWN)....	EA	1
2	73	XBFZZ		80063	SM-C-753664	SHIELDING,GASKET.....	EA	1
2	74	PAFZZ	5995-01-012-3636	80063	SM-C-754495	CABLE ASSY,RAD FREQ.....	EA	1
2	75	PAFFF	5995-01-100-0236	80063	SM-B-753936	CABLE ASSY RAD FREQ (SEE FIGURE 10 FOR BREAKDOWN)..	EA	1
2	76	PAFZZ	5305-00-054-5650	96906	MS51957-16	SCREW,MACHINE.....	EA	V
2	77	XBFZZ		80063	SM-C-754317	BRACKET,ANGLE.....	EA	1
2	78	PAFDA	5820-01-007-9393	04901	42A-S3-1-2	CONV RAD FREQ TO DC.....	EA	1
2	79	PAFZZ	5305-00-068-5287	96906	MS24693C49	SCREW,MACHINE.....	EA	6
2	80	XBFZZ		80063	SM-D-753650	COVER,SUP REAR ACCE.....	EA	1
2	81	XBFZZ		80063	SM-D-753689	SHIELDING GSKT ELCT.....	EA	1
2	82	PAFZZ	5305-00-837-9739	96906	MS21316-13	THUMBSCREW FLAT PT.....	EA	1
2	83	PAFZZ	5340-00-820-1789	96906	MS25281R13	CLAMP,LOOP.....CEP	EA	1
2	84	PAFZZ	5340-01-014-0087	96906	MS25281R14	CLAMP,LOOP.....DAT	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	85	PAFZZ	5995-01-017-7125	52214	F345AA0228A02	CABLE ASSY RAD FREQ.....	EA	1
2	86	XBFZZ		80063	SM-B-753875	BLOCK,CLAMP SUPPORT.....	EA	1
2	87	PAFZZ	5935-00-904-4050	81349	M55339/03-00027	ADAPTER,CONNECTOR.....	EA	1
2	88	PAFZZ	5995-01-011-7414	80063	SM-D-753943	CABLE ASSY RAD FREQ.....	EA	1
2	89	PAFZZ	5305-00-988-7602	96906	MS16995-26	SCREW,CAP,SOCKET HE.....	EA	4
2	90	PAFZZ	5985-00-341-5211	01456	10-36516	ADAPTER,WAVEGUIDE.....	EA	1

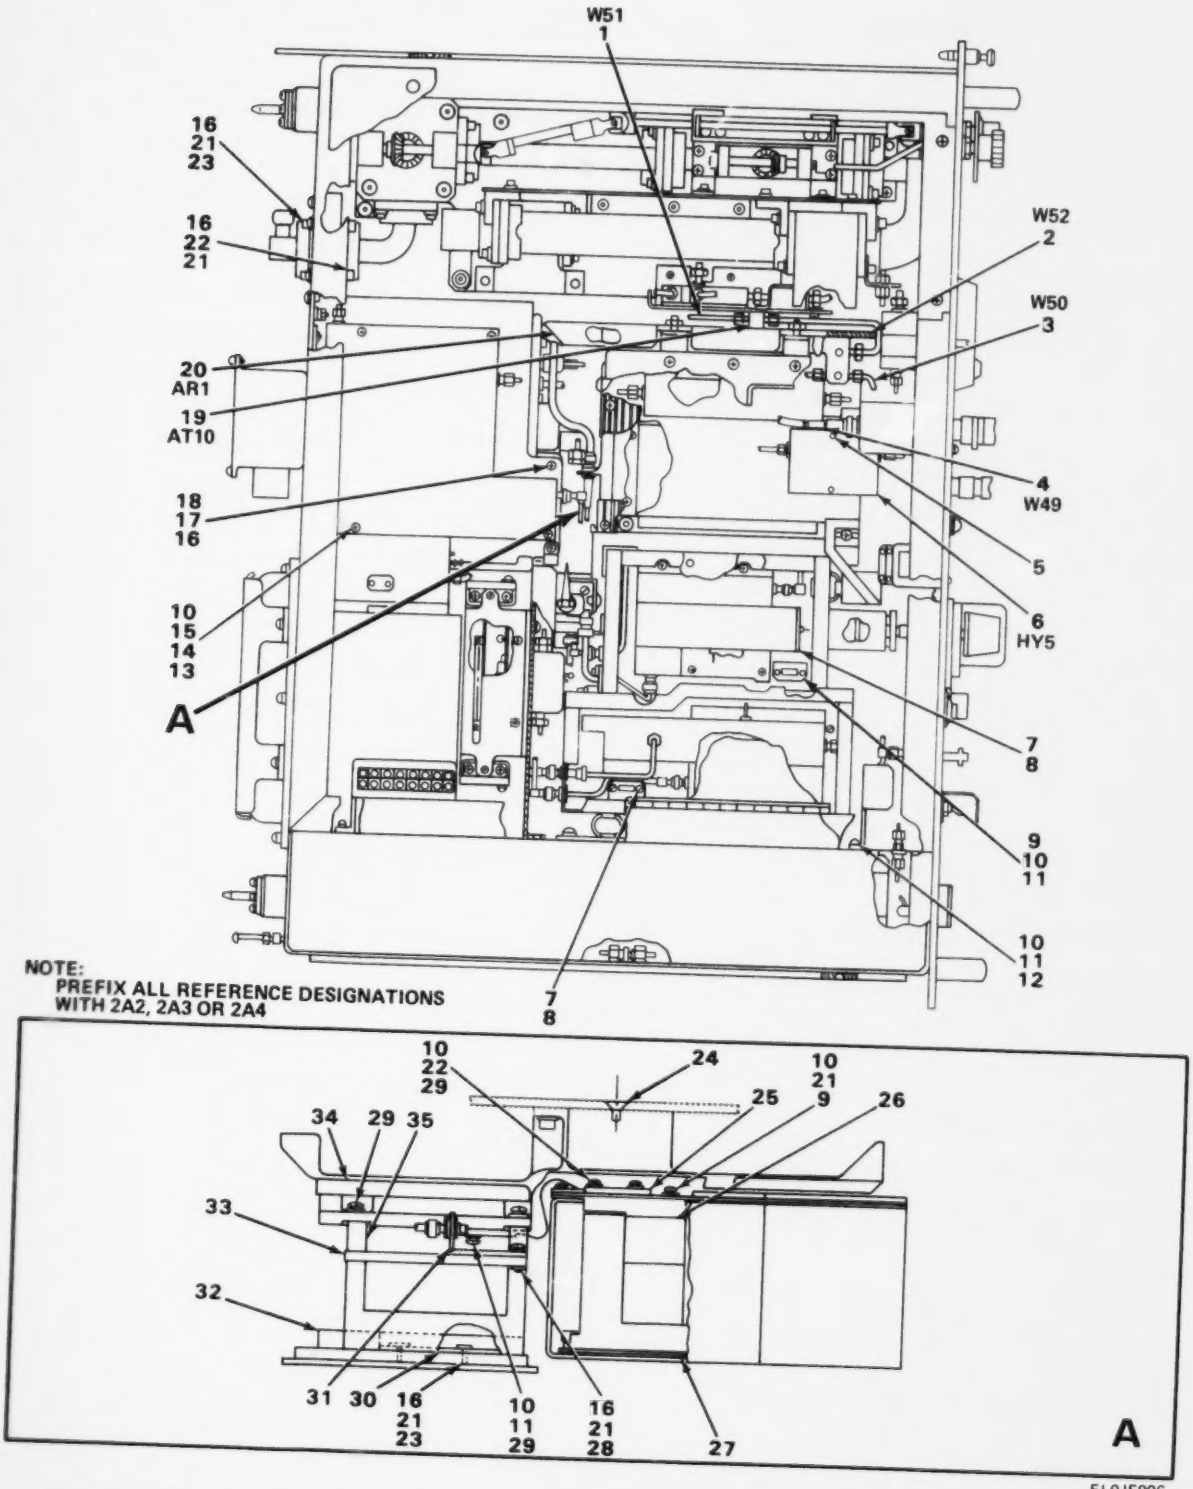

FIGURE 3. CONVERTERS, FREQUENCY, ELECTRONIC CV-3084/MSC-46(V) AND CV-3084A/MSC-46(V).

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
3	1	PAFZZ	5995-01-024-0427	80063	SM-D-754419	CABLE ASSY RAD FREQ.....DAT	EA	1
3	2	PAFZZ	5995-01-024-0426	80063	SM-C-754418	CABLE ASSY,RAD FREQ.....DAT	EA	1
3	3	PAFZZ	5995-01-024-0425	80063	SM-C-754416	CABLE ASSY,RAD FREQ.....DAT	EA	1
3	4	PAFZZ	5995-01-024-0424	80063	SM-C-754415	CABLE ASSY RAD FREQ.....DAT	EA	1
3	5	PAFZZ	5305-00-054-5654	96906	MS51957-20	SCREW,MACHINE.....	EA	2
3	6	PAFZZ	5895-01-024-0394	80063	SM-A-754420	CIRC,COAX WIDEBAND.....DAT	EA	1
3	7	PAFZZ	5310-00-595-6761	96906	MS15795-802	WASHER,FLAT.....	EA	18
3	8	PAFZZ	5305-00-054-5638	96906	MS51957-4	SCREW,MACHINE.....	EA	4
3	9	PAFZZ	5305-00-054-6651	96906	MS51957-27	SCREW,MACHINE.....	EA	10
3	10	PAFZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK.....	EA	V
3	11	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT.....	EA	V
3	12	PAFZZ	5305-00-054-6654	96906	MS51957-30	SCREW,MACHINE.....	EA	44
3	13	PAFZZ	5310-00-209-1366	96906	MS35338-58	WASHER,LOCK.....DAT	EA	1
3	14	PAFZZ	5305-00-054-6658	96906	MS51957-34	SCREW,MACHINE.....	EA	4
3	15	XBFZZ		80205	NAS671C6	NUT,PLAIN,HEXAGON.....	EA	4
3	16	PAFZZ	5310-00-069-5291	80205	NAS620C8	WASHER,FLAT.....	EA	5
3	17	PAFZZ	5305-00-054-6671	96906	MS51957-46	SCREW,MACHINE.....	EA	11
3	18	PAFZZ	5310-00-933-8119	96906	MS35338-137	WASHER,LOCK.....	EA	V
3	19	PAFZZ	5985-01-020-3400	52335	MDC1056	ATTENUATOR,FIXED.....DAT	EA	1
3	20	XBFDA		34874	WA700-2276	AMP INTED FREQ.....DAT	EA	1
3	21	PAFZZ	5305-00-988-7602	96906	MS16995-26	SCREW,CAP,HEXAGON,H.....	EA	8
3	22	PAFZZ	5310-00-880-5978	96906	MS15795-807	WASHER,FLAT.....	EA	V
3	23	PAFZZ	5305-00-054-6673	96906	MS51957-48	SCREW,MACHINE.....	EA	8
3	24	PAFZZ	5305-00-079-5835	96906	MS24693C50	SCREW,MACHINE.....	EA	V
3	25	XBFZZ		80063	SM-C-754541	THERMAL CONDUCTOR.....	EA	1
3	26	XBFZZ		80063	SM-D-754489-1	HEAT SINK,ELEC.....	EA	1
3	27	XBFZZ		80063	SM-B-754546	SHIM.....	EA	1
3	28	PAFZZ	5305-00-054-6670	96906	MS51957-45	SCREW MACHINE.....	EA	5

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
3	29	PAFZZ	5305-00-054-6652	96906	MS51957-28	SCREW,MACHINE.....	EA	2
3	30	XBFZZ		80063	SM-C-753763	BRKT,CLAMP,FILTER.....	EA	1
3	31	XBFZZ		80063	SM-C-754386	BRKT,SUPPORT.....	EA	1
3	32	XBFDA		31196	1130000796	FILTER,PHASE COMPEN.....	EA	1
3	33	XBFZZ		80063	SMC754542	RETAINER,FILTER.....	EA	2
3	34	XBFZZ		80063	SMF754541	HEAT SINK,ELEC EQP.....	EA	1
3	35	XBFZZ		06540	9755-SS-0832	STANDOFF.....	EA	3

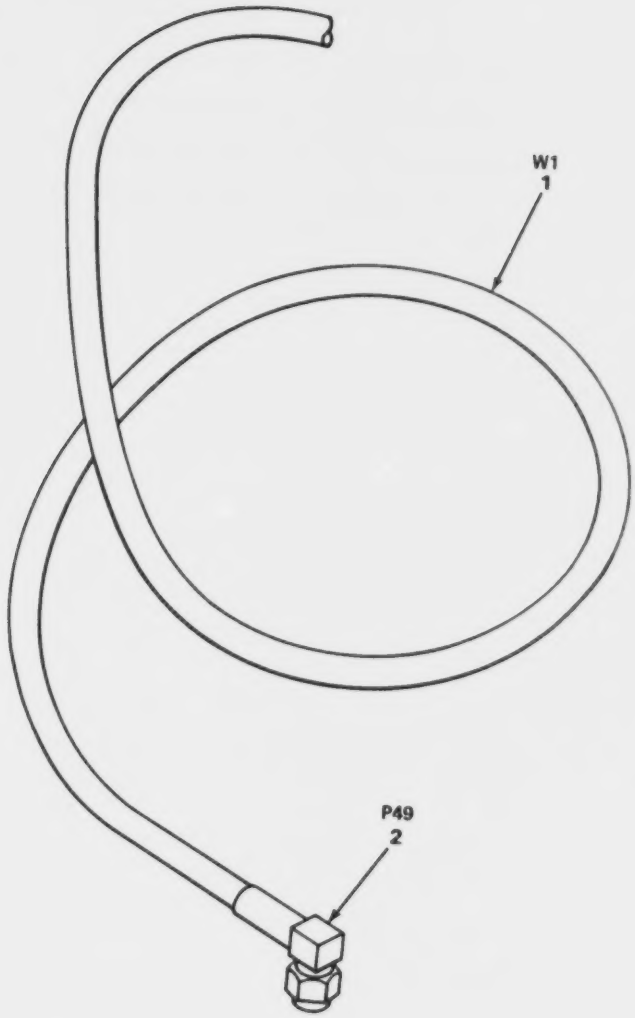

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W35

EL0JE010

FIGURE 4. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0601 CABLE ASSEMBLY, RF		
4	1	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
4	2	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONNECTOR,PLUG ELEC.....	EA	1

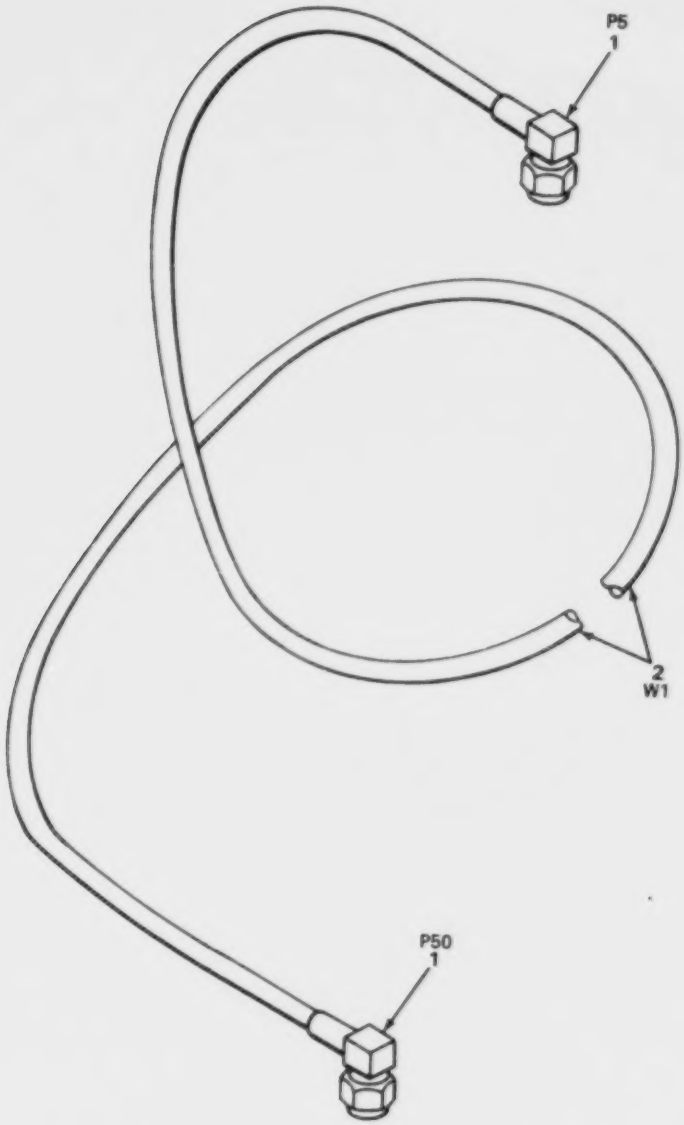

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2W36

ELOJE011

FIGURE 5. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0602 CABLE ASSEMBLY, RF		
5	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONN,PLUG ELECTRIC.....	EA	2
5	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE RADIO FREQ.....	FT	V

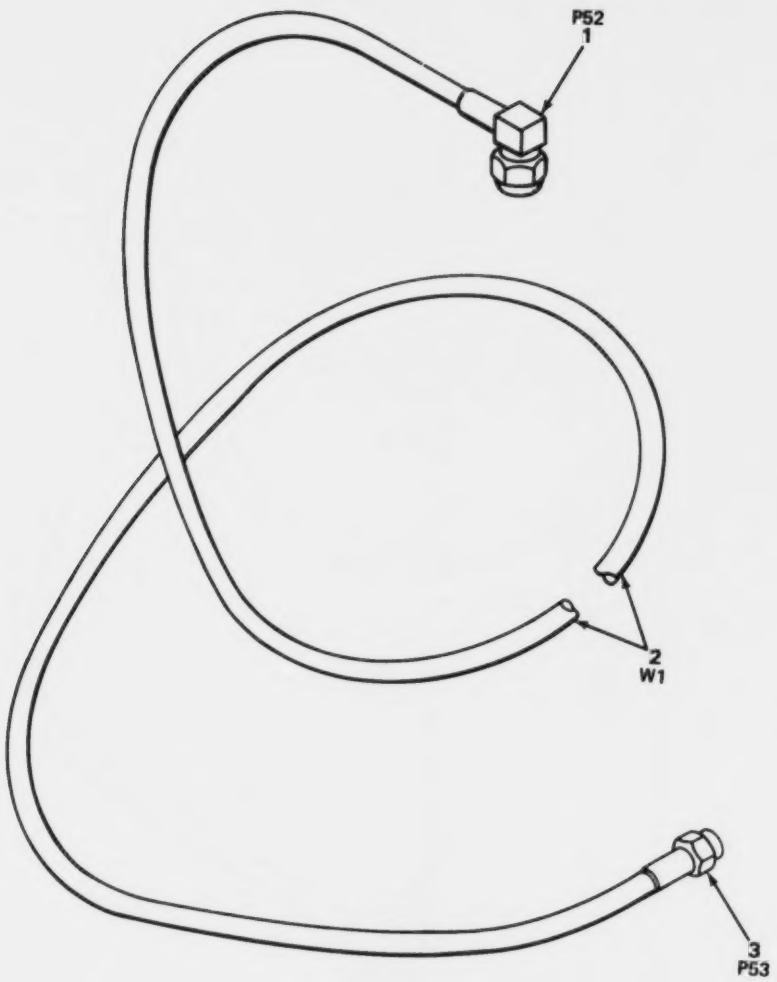

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W37

EL0JE012

FIGURE 6. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0603 CABLE ASSEMBLY, RF		
6	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONN PLUG ELEC.....	EA	1
6	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
6	3	PAFZZ	5935-01-009-2960	26805	2031-7188-02	CONNECTOR,PLUG ELEC.....	EA	1

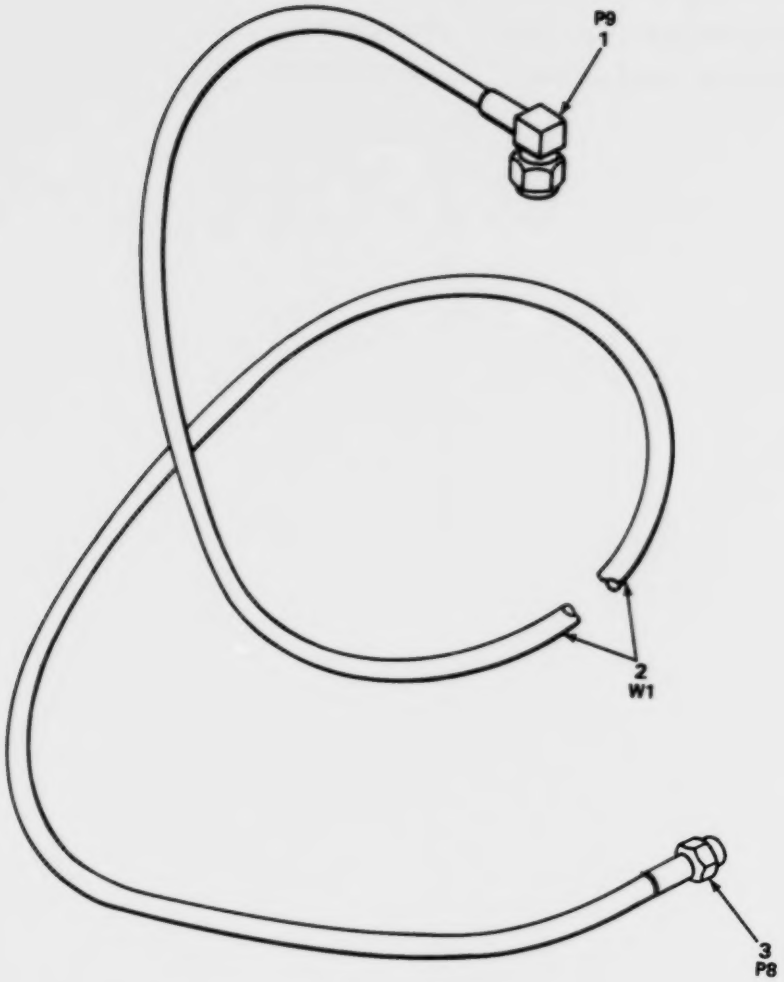

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W6

EL0JE013

FIGURE 7. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0604 CABLE ASSEMBLY, RF		
7	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONN,PLUG ELEC.....	EA	1
7	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RAD FREQ.....	FT	V
7	3	PAFZZ	5935-01-009-2960	26805	2031-7188-02	CONNECTOR,PLUG ELEC.....	EA	1

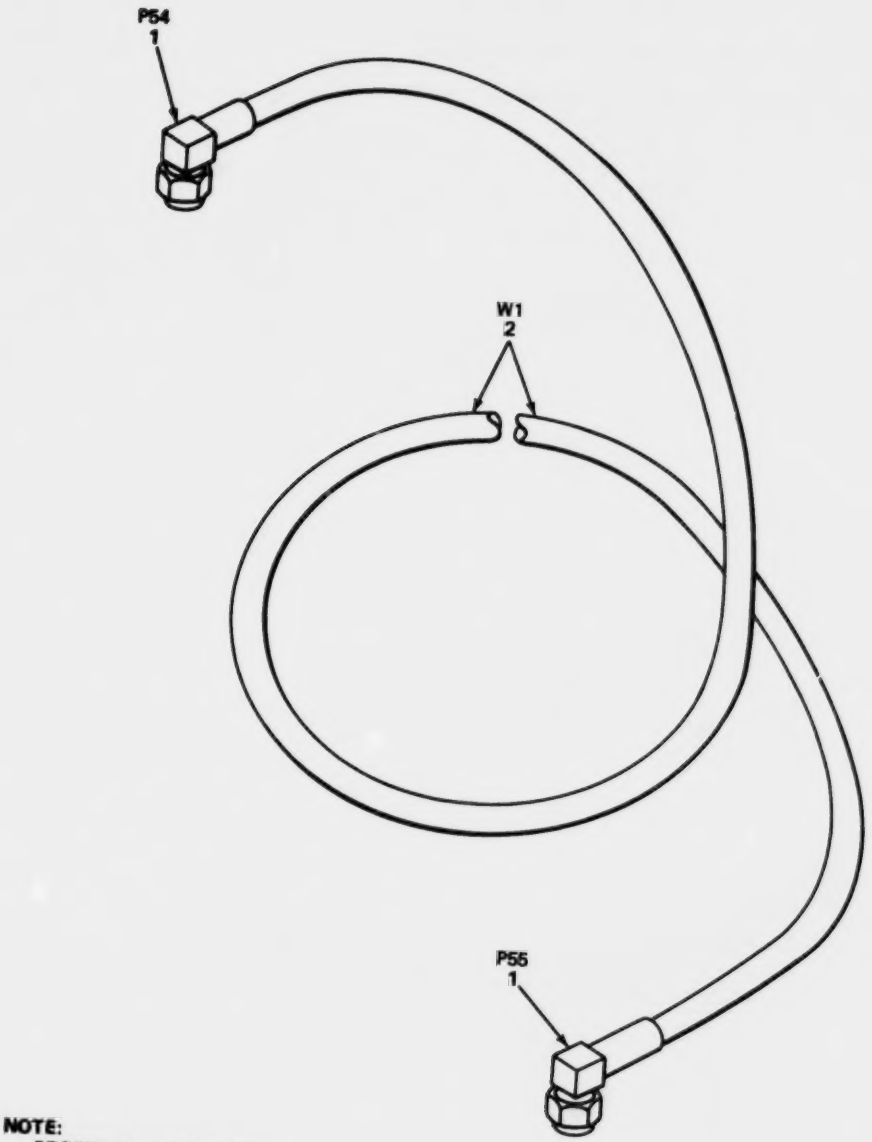

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2W43

EL0JE014

FIGURE 8. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0606 CABLE ASSEMBLY, RF		
8	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONN,PLUG ELEC.....	EA	2
8	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V

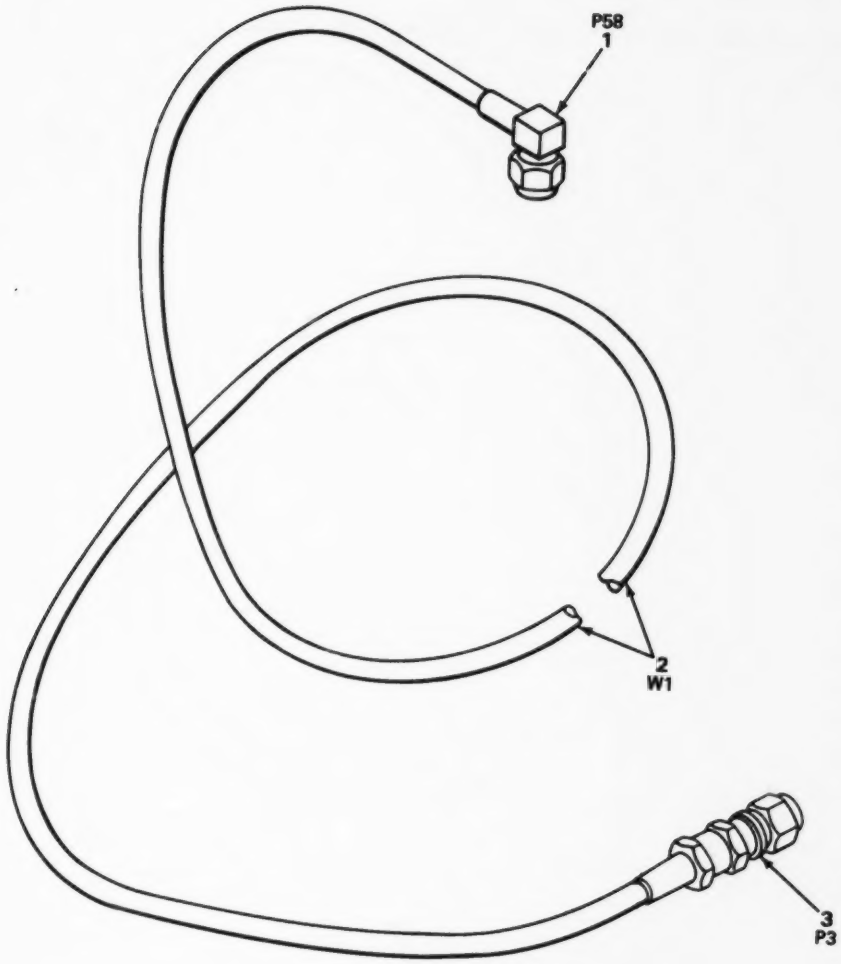

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W2

ELOJE015

FIGURE 9. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0607 CABLE ASSEMBLY, RF		
9	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONN,PLUG ELEC.....	EA	1
9	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
9	3	PAFZZ	5935-01-009-2960	26805	2031-7188-02	CONNECTOR,PLUG.....	EA	1

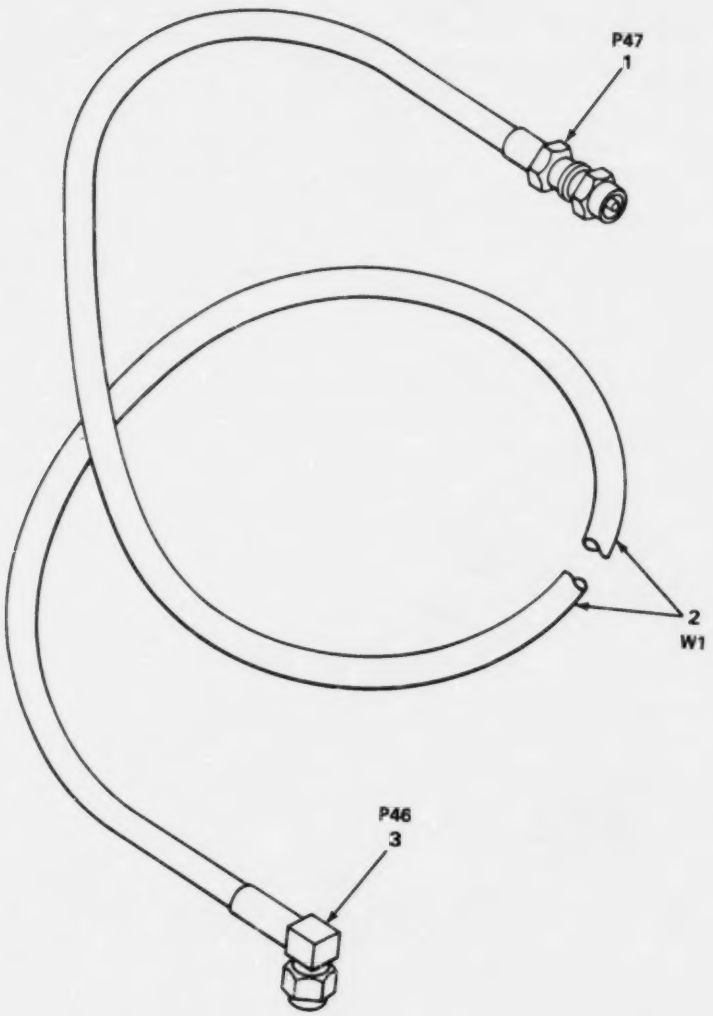

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2W33

ELOJE016

FIGURE 10. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0609 CABLE ASSEMBLY, RF		
10	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONN,PLUG,ELEC	EA	1
10	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ	FT	V
10	3	PAFZZ	5935-01-005-0024	80063	SM-A-753745	CONNECTOR,RECEPTACL	EA	1

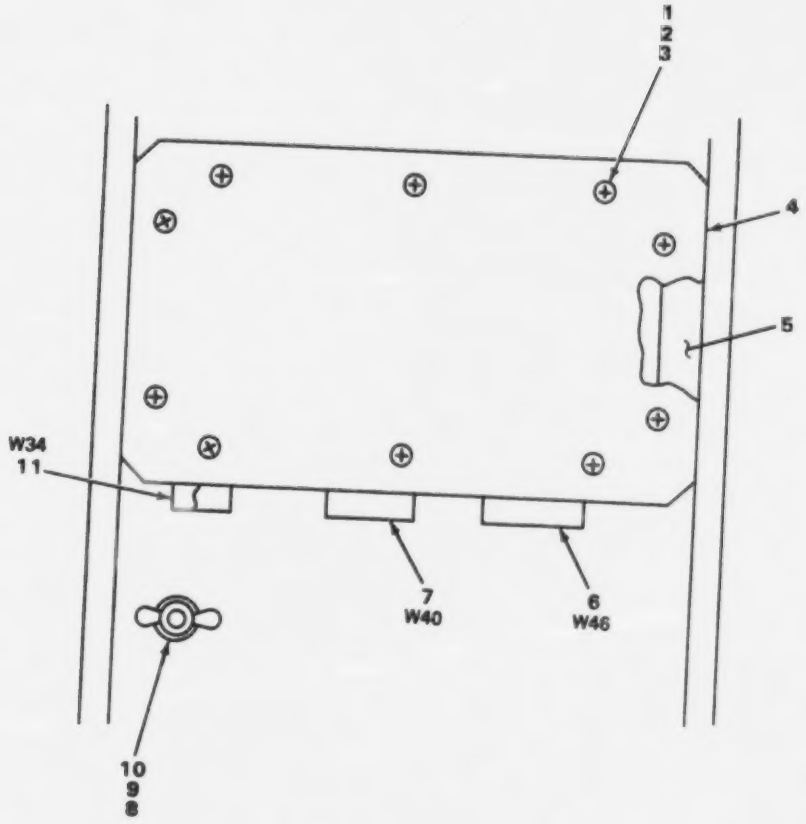

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2ACR1

ELOJE017

FIGURE 11. IF CONVERSION STRIPLINE ASSEMBLY.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0610 IF CONVERSION STRIPLINE ASSEMBLY		
11	1	PAFZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	10
11	2	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT	EA	10
11	3	PAFZZ	5305-00-054-6650	96906	MS51957-26	SCREW MACHINE	EA	10
11	4	XBFZZ		80063	SM-C-753663	COVER,ACCESS,REAR	EA	1
11	5	XBFZZ		80063	SM-C-753660	SHLDNG GSKT ELEC	EA	1
11	6	XBFFF		80063	SM-D-753869	WIRING HRNS,AC PWR (SEE FIGURE 16 FOR BREAKDOWN)	EA	1
11	7	XBFFF		80063	SM-B-753941	CABLE ASSY RAD FREQ (SEE FIGURE 18 FOR BREAKDOWN)	EA	1
11	8	PAFZZ	5310-00-595-6772	95542	2038-8009	WASHER,FLAT	EA	1
11	9	PAFZZ	5310-00-933-8120	96906	MS35338-138	WASHER,LOCK	EA	1
11	10	PAFZZ	5310-00-720-8549	96906	MS35426-13	NUT,PLAIN WING	EA	1
11	11	XBFFF		80063	SM-B-753937	CABLE ASSY,RAD FREQ (SEE FIGURE 19 FOR BREAKDOWN)	EA	1

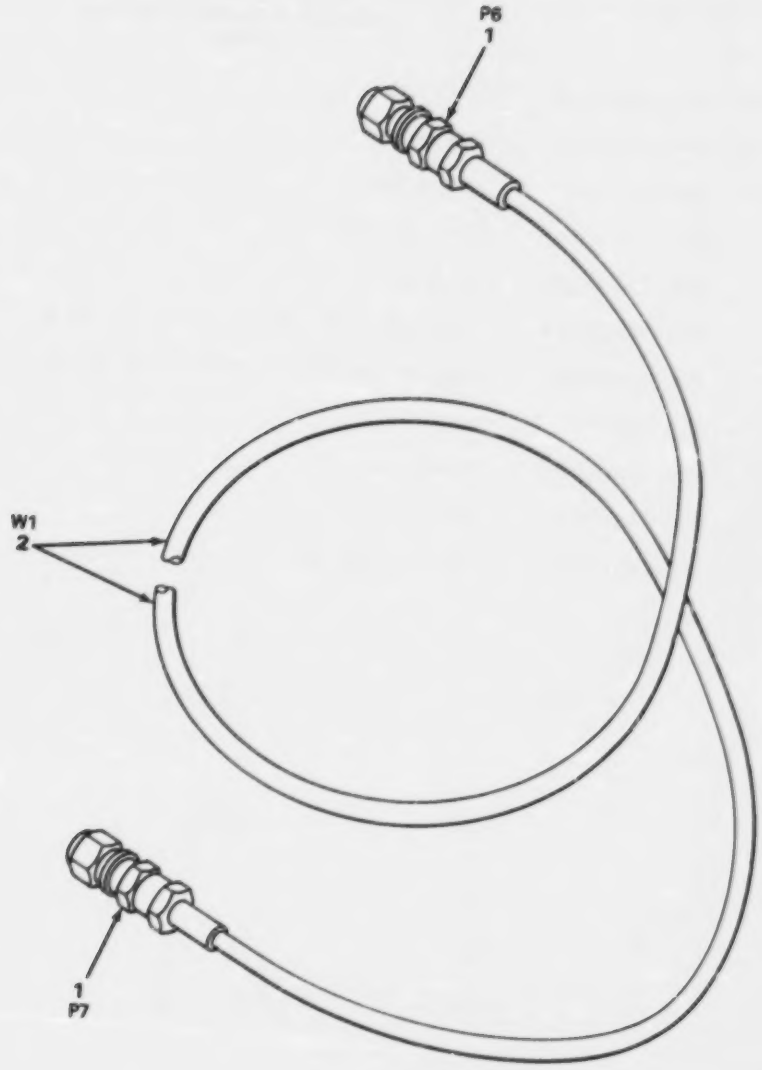

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2AZW5

ELOJE018

FIGURE 12. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0611 CABLE ASSEMBLY, RF		
12	1	PAFZZ	5935-01-009-2960	26805	2031-7188-02	CONNECTOR,PLUG ELEC.....	EA	2
12	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V

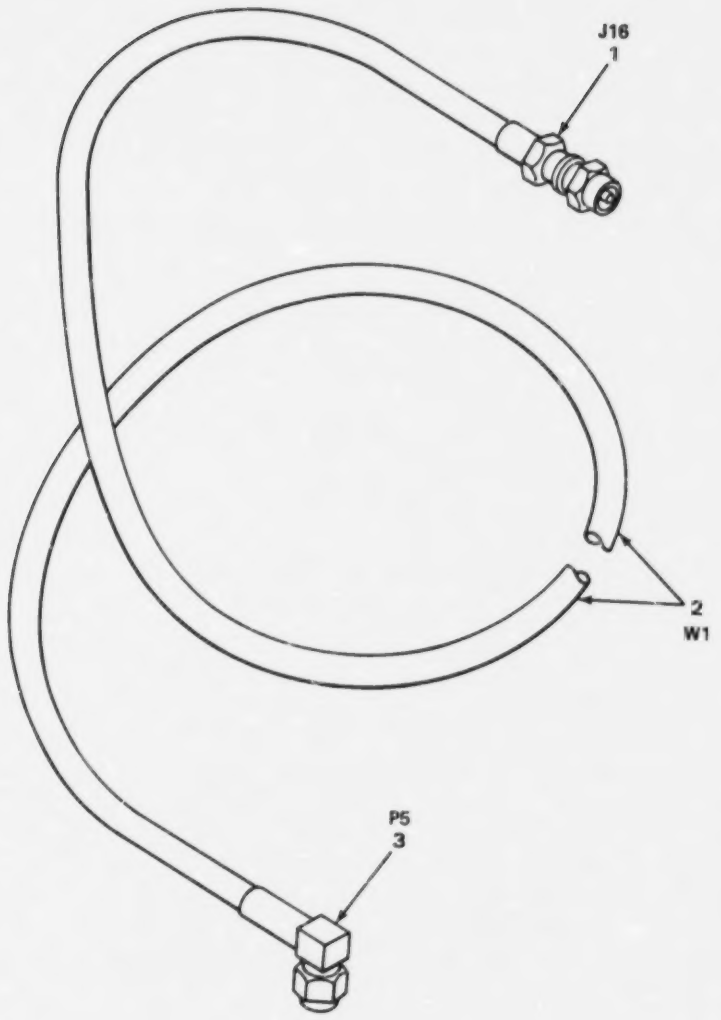

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2W4

EL0JE019

FIGURE 13. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0612 CABLE ASSEMBLY, RF		
13	1	PAFZZ	5935-01-005-0024	26805	2034-7188-02	CONNECTOR,RECEPT.....	EA	1
13	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
13	3	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONNECTOR,PLUG ELEC.....	EA	1

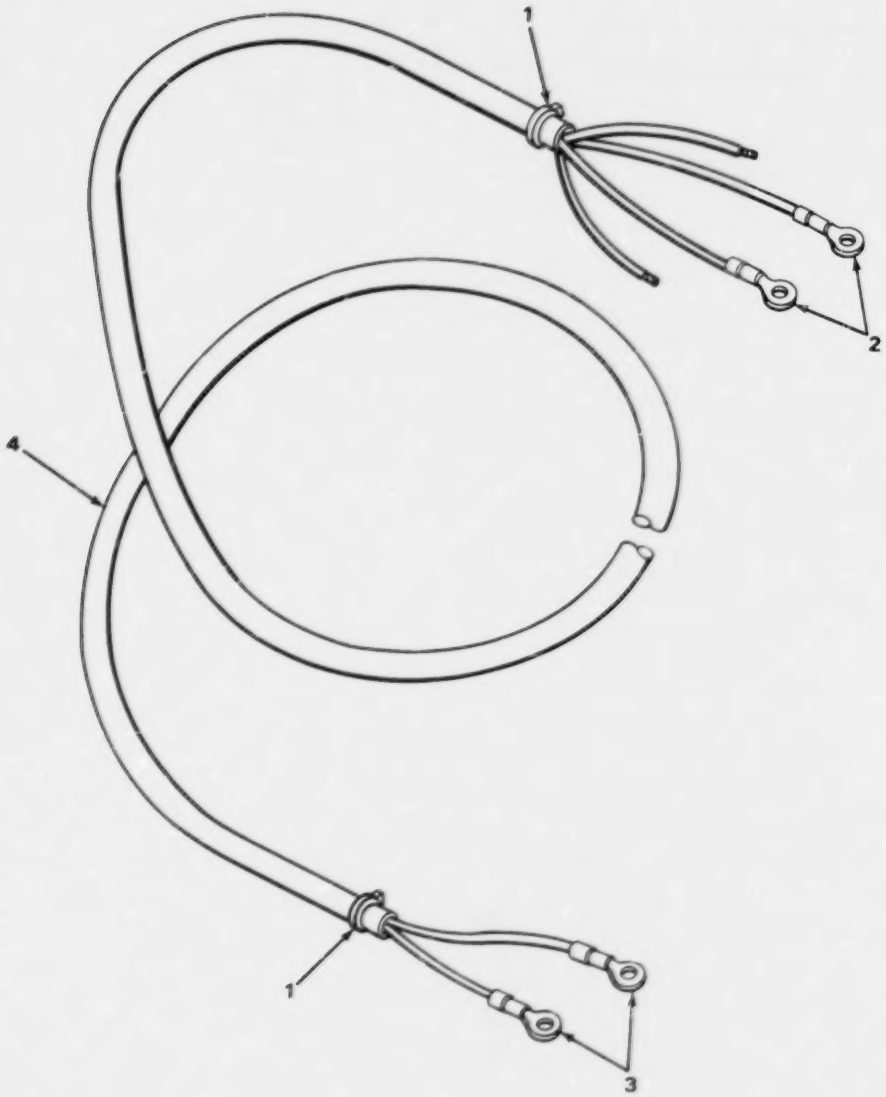

EL0JE020

FIGURE 14. WIRING HARNESS, INTERLOCK.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0613 WIRING HARNESS INTERLOCK		
14	1	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN.....	EA	2
14	2	PAFZZ	5940-00-204-8966	96906	MS25036-102	TERMINAL,LUG.....	EA	2
14	3	PAFZZ	5940-01-013-8289	96906	MS25036-148	TERMINAL,LUG.....	EA	2
14	4	PAFZZ	5970-00-052-3297	81349	MIL-I-23053/5	INSULATION,SLEEVING.....	IN	5

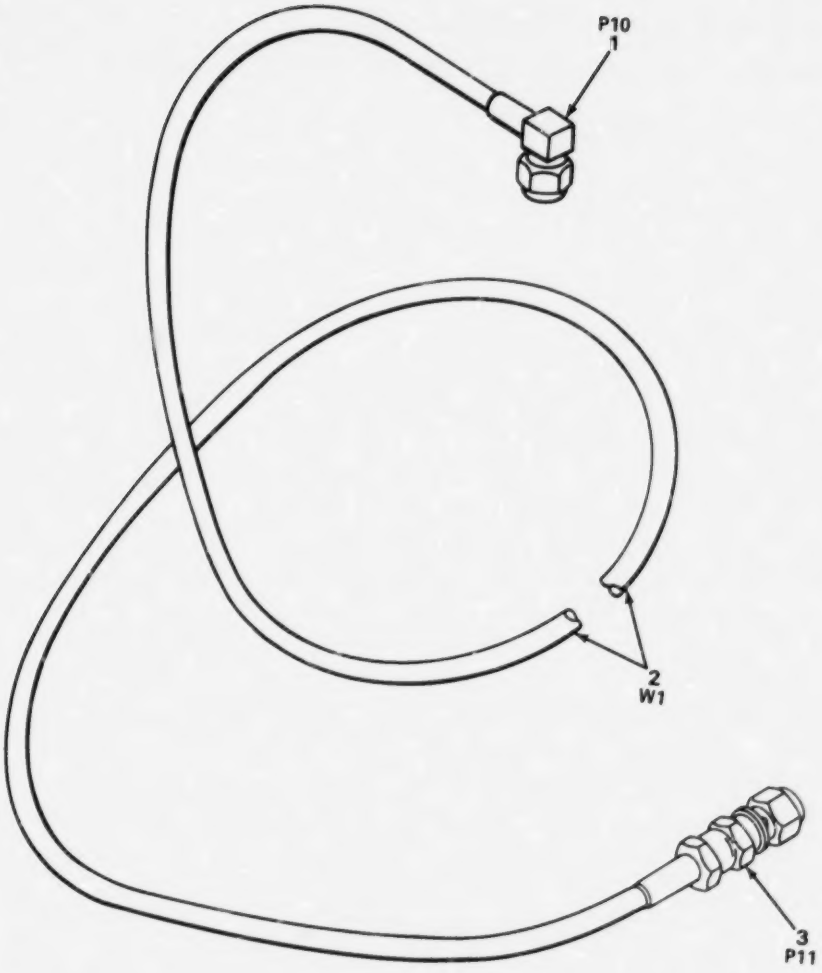

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W7

EL0JE021

FIGURE 15. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0614 CABLE ASSEMBLY, RF		
15	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONNECTOR,PLUG ELEC.....	EA	1
15	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
15	3	PAFZZ	5935-01-009-2960	26805	2031-7188-02	CONNECTOR,PLUG ELEC.....	EA	1

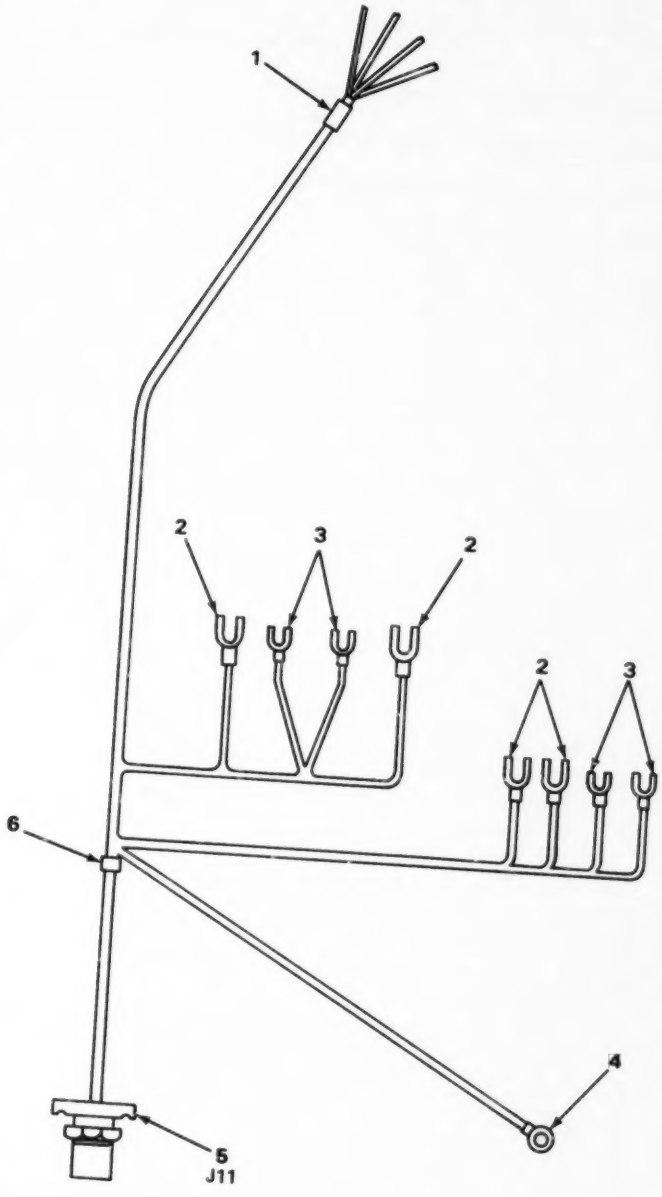

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2W46

ELOJE022

FIGURE 16. WIRING HARNESS, AC PRIME POWER.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0616 WIRING HARNESS, AC PRIME POWER		
16	1	XBFZZ		96906	MS3368-5-9A	STRAP,TIEDOWN	EA	1
16	2	PAFZZ	5940-01-138-2996	00779	328281	TERMINAL,LUG	EA	4
16	3	PAFZZ	5940-00-636-5593	00779	34541	TERMINAL,LUG	EA	4
16	4	PAFZZ	5940-00-143-4780	96906	MS25036-108	TERMINAL,LUG	EA	1
16	5	PAFZZ	5935-00-845-2537	96906	MS3114E12-3P	CONNECTOR,PLUG ELEC	EA	1
16	6	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN	EA	1

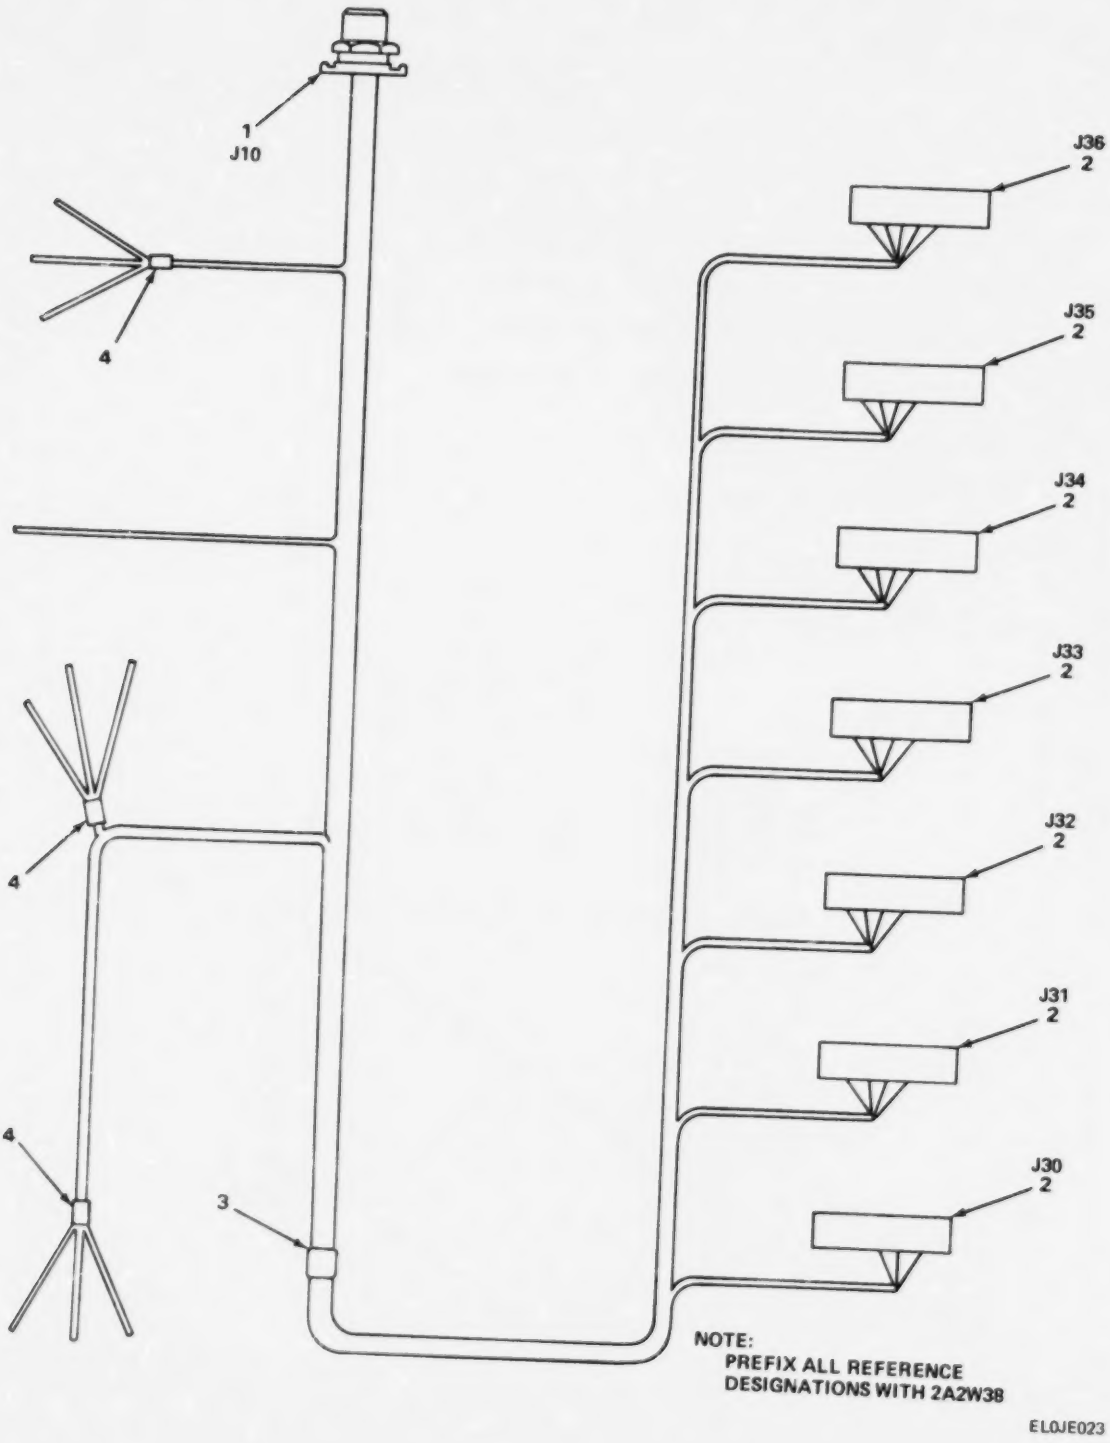

FIGURE 17. WIRING HARNESS, FREQUENCY CONTROL.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0618 WIRING HARNESS, FREQUENCY CONTROL		
17	1	PAFZZ	5935-00-913-4462	96906	MS3114E20-39S	CONNECTOR,RECEPTACL	EA	1
17	2	XBFZZ		95238	600-4PCGDF7-50	CONNECTOR,RECEPT	EA	7
17	3	XBFZZ		96906	MS3368-5-9A	STRAP,TIEDOWN,IDENT	EA	1
17	4	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN	EA	3

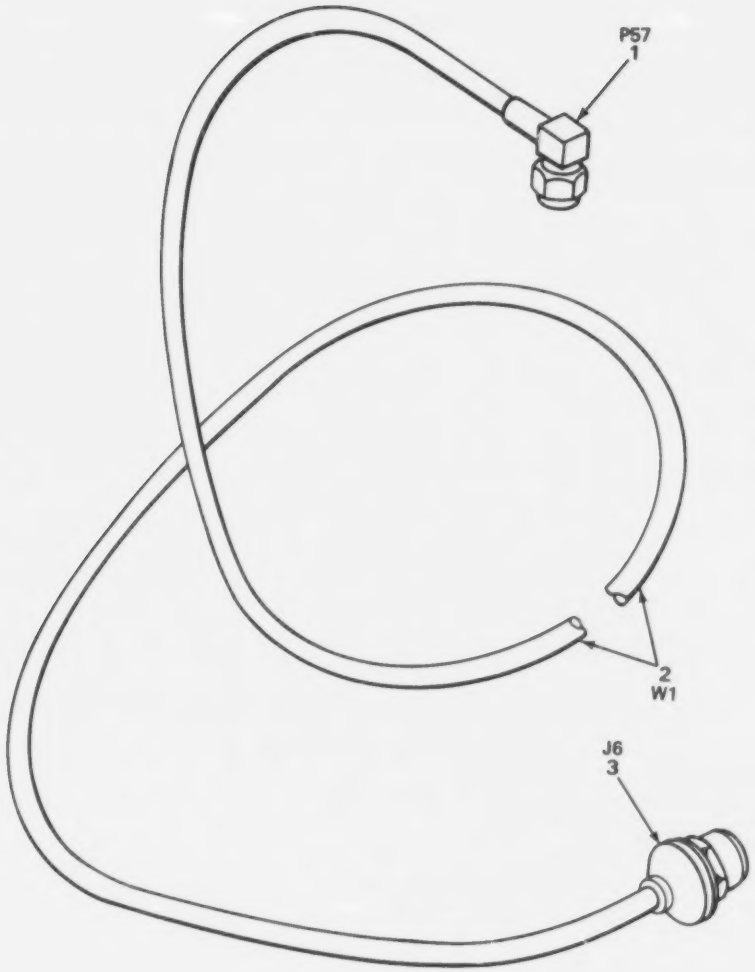

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W40

ELOJE024

FIGURE 18. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0620 CABLE ASSEMBLY, RF		
18	1	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONNECTOR,PLUG ELEC.....	EA	1
18	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
18	3	PAFZZ	5935-01-007-8810	26805	3034-7188-02	CONNECTOR,RECEPT.....	EA	1

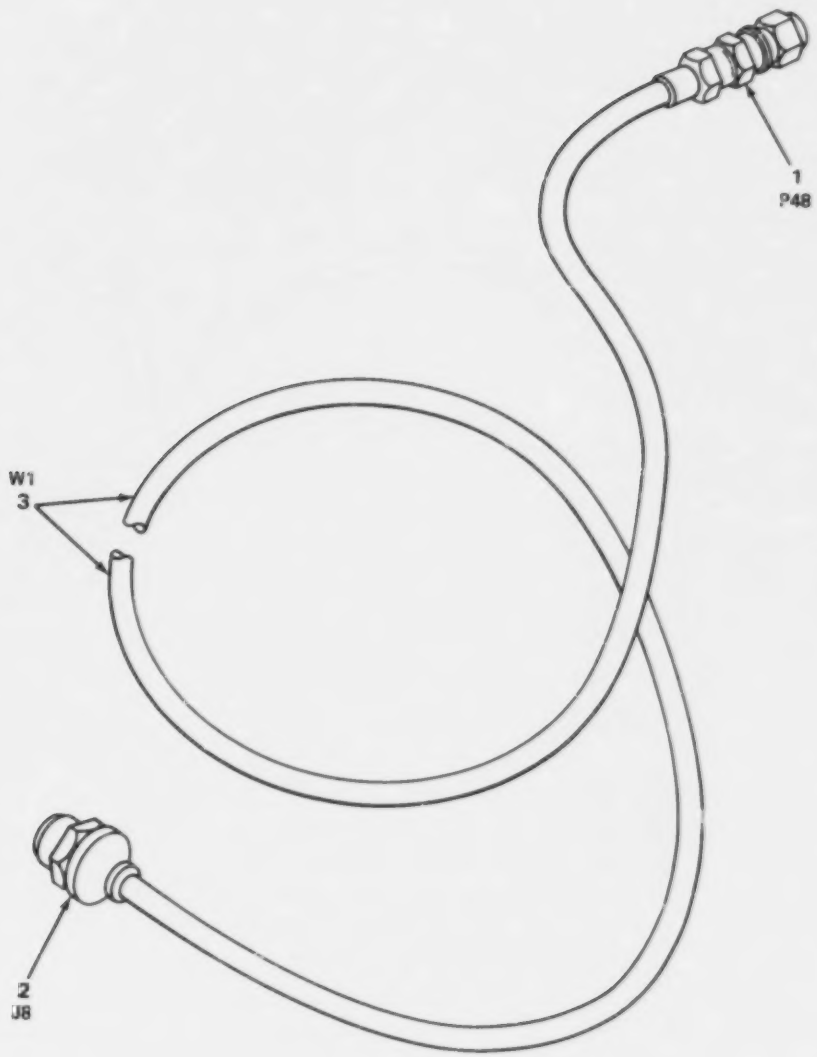

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W34

ELOJE025

FIGURE 19. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0621 CABLE ASSEMBLY, RF		
19	1	PAFZZ	5935-01-009-2960	26805	2031-7188-02	CONNECTOR,PLUG ELEC.....	EA	1
19	2	PAFZZ	5935-01-007-8810	26805	3034-7188-02	CONNECTOR,RECEPTACL.....	EA	1
19	3	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V

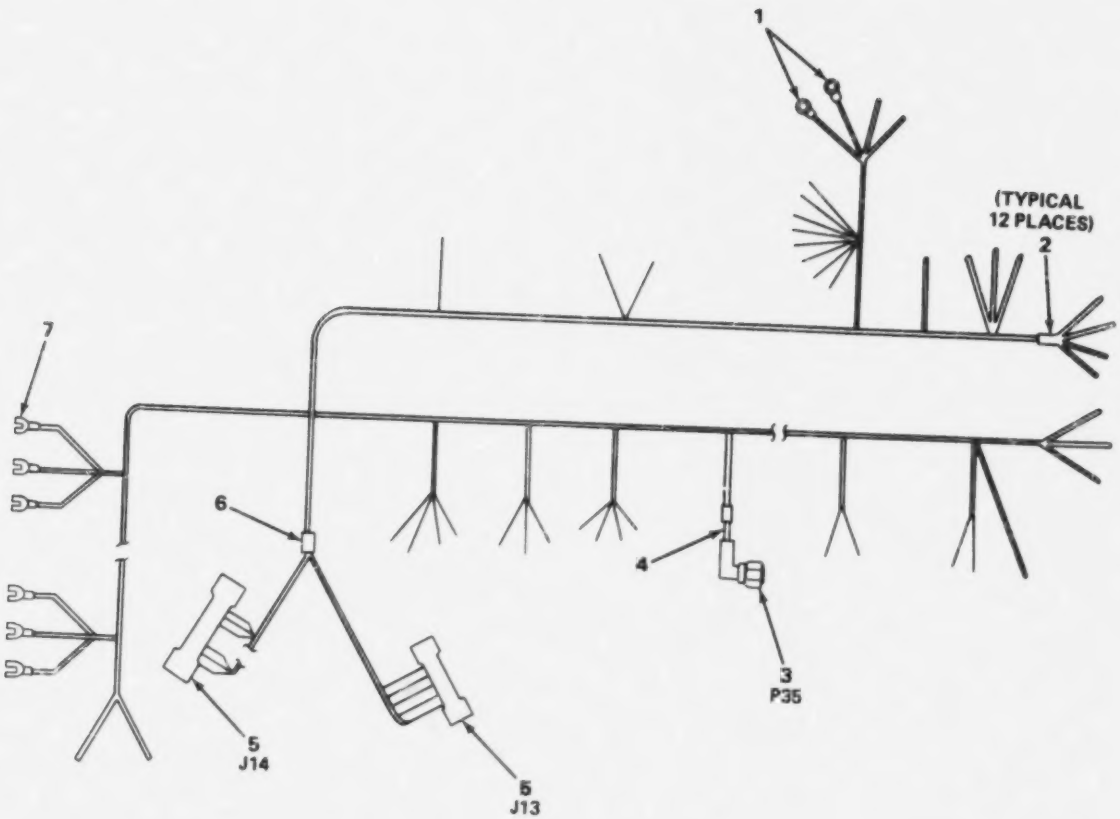

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W45

ELOJE026

FIGURE 20. WIRING HARNESS, INTERCONNECTION.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0623 WIRING HARNESS, INTERCONNECTION		
20	1	PAFZZ	5940-00-804-0365	96906	MS25036-146	TERMINAL,LUG	EA	2
20	2	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN	EA	12
20	3	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONNECTOR,PLUG,ELEC	EA	1
20	4	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ	FT	V
20	5	PAFZZ	5935-01-005-2631	97954	MIG23F	CONNECTOR,RECEPT	EA	2
20	6	PAFZZ	5975-00-482-3954	96906	MS3368-5-9E	STRAP,TIEDOWN IDENT	EA	1
20	7	PAFZZ	5940-00-983-7091	00779	323011	TERMINAL,LUG	EA	6

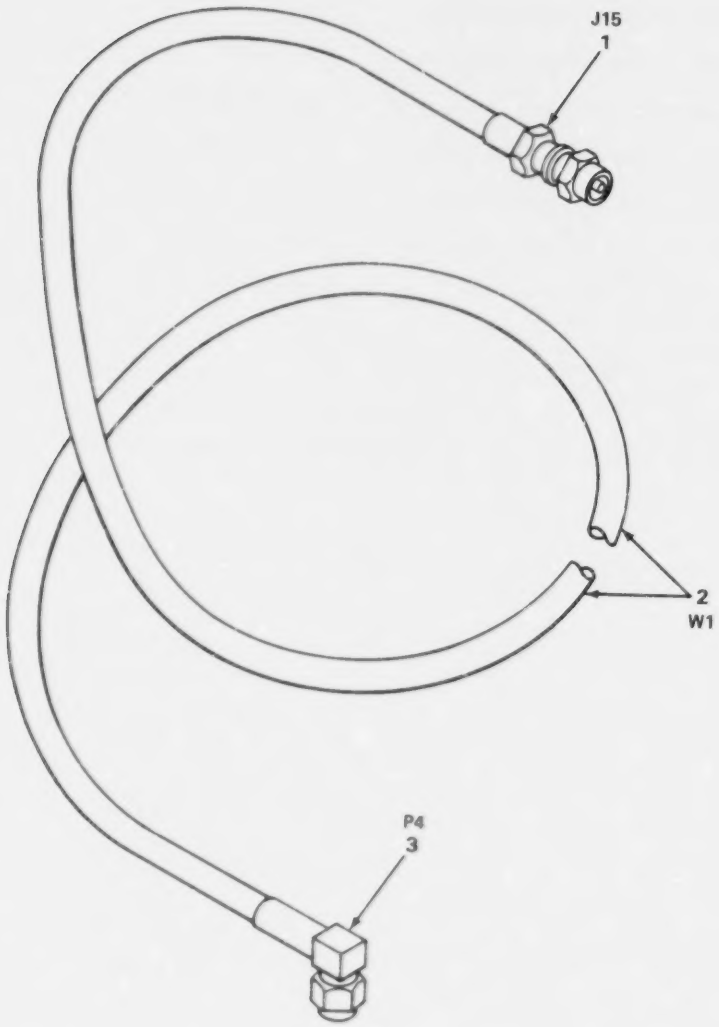

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W3

EL0JE027

FIGURE 21. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0624 CABLE ASSEMBLY, RF		
21	1	PAFZZ	5935-01-005-0024	80063	SM-A-753745	CONNECTOR,RECEPT.....	EA	1
21	2	PAFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
21	3	PAFZZ	5935-01-120-5144	26805	2037-5008-02	CONNECTOR,PLUG ELEC.....	EA	1

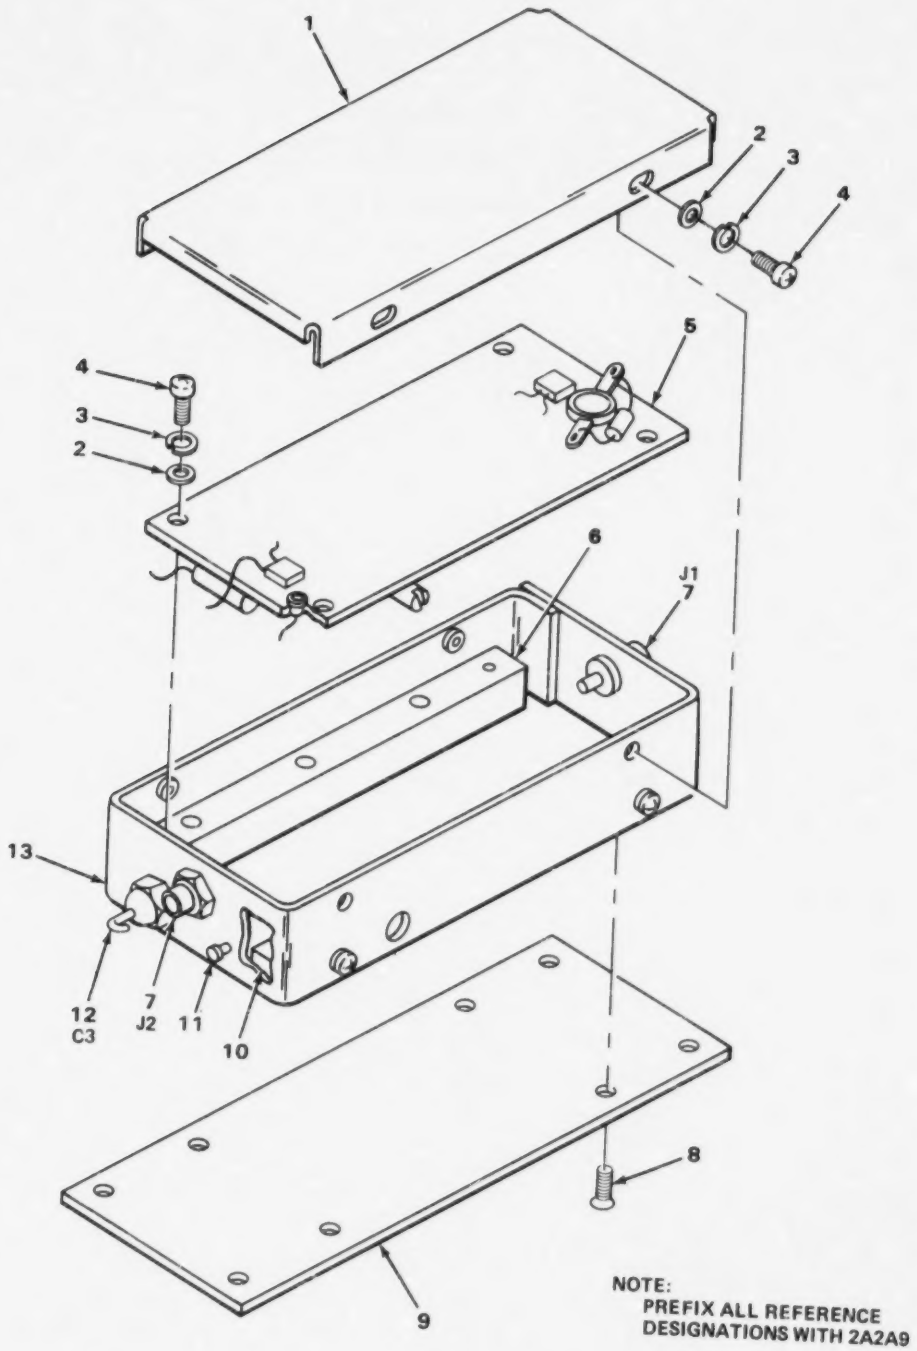

FIGURE 22. 70 MHZ MONITOR AMPLIFIER.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0625 70 MHZ MONITOR AMPLIFIER		
22	1	XBDZZ		80063	SM-C-753579	COVER,ENCLOSURE	EA	1
22	2	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	8
22	3	PADZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	8
22	4	PADZZ	5305-00-054-5648	96906	MS51957-14	SCREW,MACHINE	EA	8
22	5	XBDDD		80063	SM-C-753212	CIRCUIT CARD ASSY (SEE FIGURE 23 FOR BREAKDOWN)	EA	1
22	6	XBDZZ		31196	3350000881	SUPPORT,MOUNTING	EA	1
22	7	PADZZ	5935-01-016-8610	26805	2056-0000-02	CONNECTOR,RECEPT	EA	2
22	8	PADZZ	5305-00-225-6400	96906	MS24693C3	SCREW,MACHINE	EA	4
22	9	XBDZZ		31196	2090000629	PLATE,MOUNTING	EA	1
22	10	XBDZZ		31196	3350000630	SUPPORT,MOUNTING	EA	1
22	11	PADZZ	5940-00-913-9383	81349	SE13XC04	TERMINAL,STUD	EA	1
22	12	PADZZ	5910-00-852-7099	81349	CK70AX471K	CAPACITOR	EA	1
22	13	XBDZZ		31196	3350000631	ENCLOSURE	EA	1

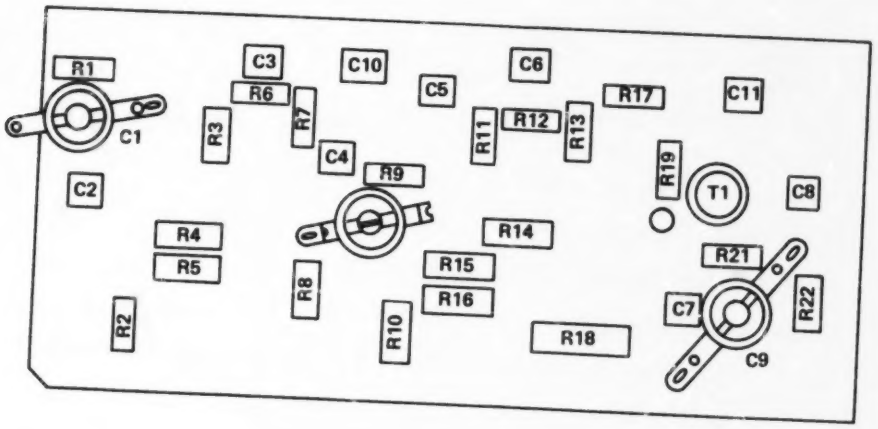

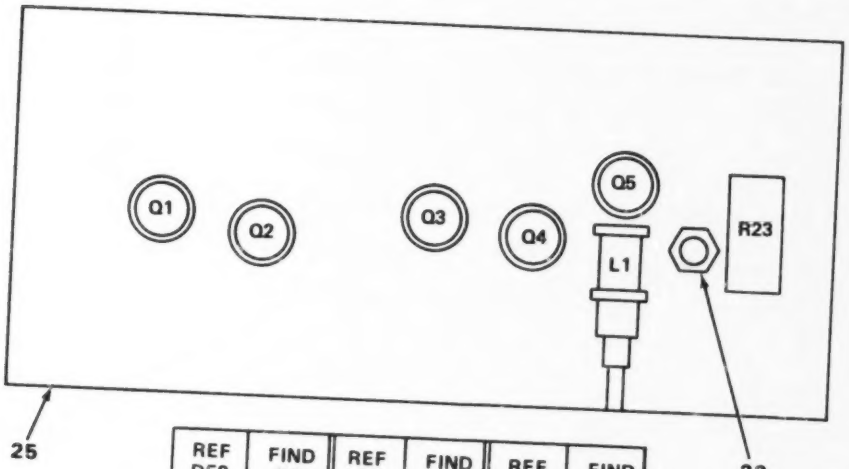

REF DES	FIND NO.	REF DES	FIND NO.	REF DES	FIND NO.
C1	1	Q5	6	R17	15
C2	2	R1	7	R18	16
C3	2	R2	8	R19	17
C4	2	R3	9	R20	18
C5	2	R4	10	R21	19
C6	2	R5	10	R22	8
C7	2	R6	11	R23	20
C8	2	R7	12	T1	21
C9	3	R8	13		
C10	2	R9	14		
C11	2	R10	8		
C12	3	R11	9		
L1	4	R12	11		
Q1	5	R13	12		
Q2	6	R14	13		
Q3	5	R15	10		
Q4	6	R16	10		

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A9A1

EL0JE029

FIGURE 23. CIRCUIT CARD ASSEMBLY.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 062501 CIRCUIT CARD ASSEMBLY		
23	1	PADZZ	5910-00-944-3561	72982	538-000B7-0-25	CAPACITOR,VARIABLE	EA	1
23	2	XBDZZ		80063	CK05BX103K	CAPACITOR,FIXED,CER	EA	9
23	3	PADZZ	5910-00-903-3714	72982	538-001D9-0-35	CAPACITOR,VARIABLE	EA	2
23	4	PADZZ	5950-01-004-9327	31196	2350000998	COIL,RADIO FREQUENC	EA	1
23	5	PADZZ	5961-00-227-9783	81349	JAN2N3866	TRANSISTOR	EA	2
23	6	PADZZ	5961-00-153-3578	80131	2N5943	TRANSISTOR	EA	3
23	7	PADZZ	5905-00-115-2223	81349	RCR07G430JS	RESISTOR,FIXED,COMP	EA	1
23	8	PADZZ	5905-00-442-9356	81349	RCR07G240JS	RESISTOR,FIXED,COMP	EA	3
23	9	PADZZ	5905-00-111-4845	81349	RCR07G201JS	RESISTOR,FIXED,COMP	EA	2
23	10	PADZZ	5905-00-106-1274	81349	RCR20G911JS	RESISTOR,FIXED,COMP	EA	4
23	11	PADZZ	5905-00-119-3503	81349	RCR07G271JS	RESISTOR,FIXED,COMP	EA	2
23	12	PADZZ	5905-00-107-0656	81349	RCR07G100JS	RESISTOR,FIXED,COMP	EA	2
23	13	PADZZ	5905-00-110-0196	81349	RCR20G102JS	RESISTOR,FIXED,COMP	EA	2
23	14	PADZZ	5905-00-104-8368	81349	RCR07G470JS	RESISTOR,FIXED,COMP	EA	1
23	15	PADZZ	5905-00-133-0440	81349	RCR07G560JS	RESISTOR,FIXED,COMP	EA	1
23	16	PADZZ	5905-00-141-1149	81349	RCR32G391JS	RESISTOR,FIXED,COMP	EA	1
23	17	PADZZ	5905-00-141-0742	81349	RCR07G181JS	RESISTOR,FIXED,COMP	EA	1
23	18	PADZZ	5905-00-402-7049	81349	RCR05G470JS	RESISTOR,FIXED,COMP	EA	1
23	19	PADZZ	5905-00-106-3666	81349	RCR07G103JS	RESISTOR,FIXED,COMP	EA	1
23	20	PADZZ	5905-00-147-0386	81349	RCR42G300JS	RESISTOR,FIXED,COMP	EA	1
23	21	XBDZZ		31196	2350000999	TRANSFORMER,POWER	EA	1
23	22	PADZZ	5310-00-827-9139	96906	MS51858-2	NUT,PLAIN HEXAGON	EA	1
23	23	PADZZ	5310-00-716-5612	96906	MS51859-2	WASHER,FLAT	EA	1
23	24	PADZZ	5305-00-833-8631	96906	MS18212-15	SCREW,MACHINE	EA	1
23	25	XBDZZ		31196	3060000628	PRINTED WIRING BRD	EA	1

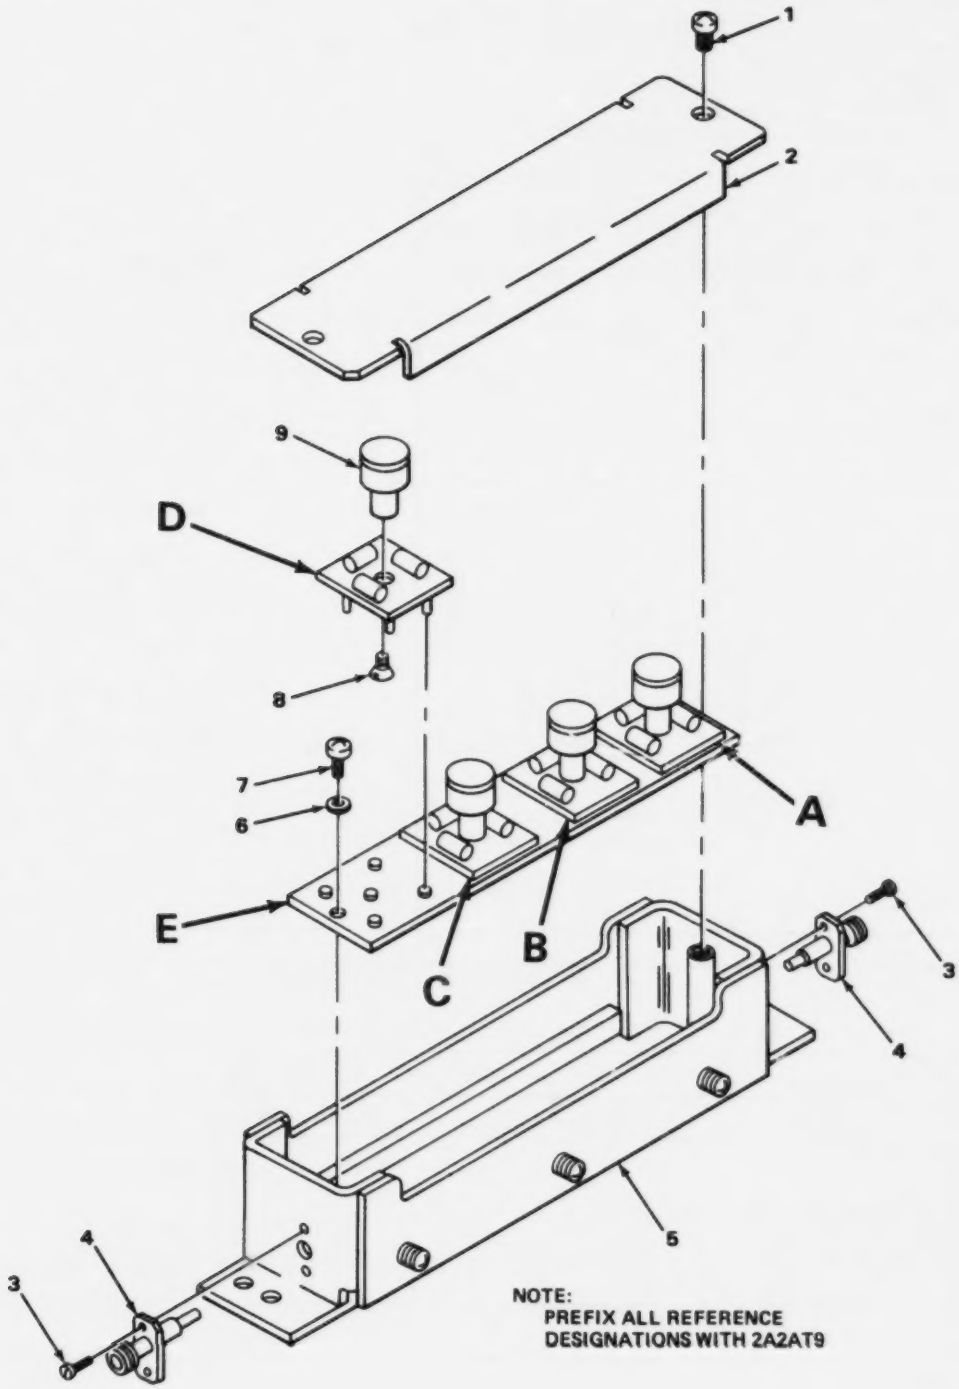

FIGURE 24. AMPLITUDE STEP ATTENUATOR (SHEET 1 OF 2).

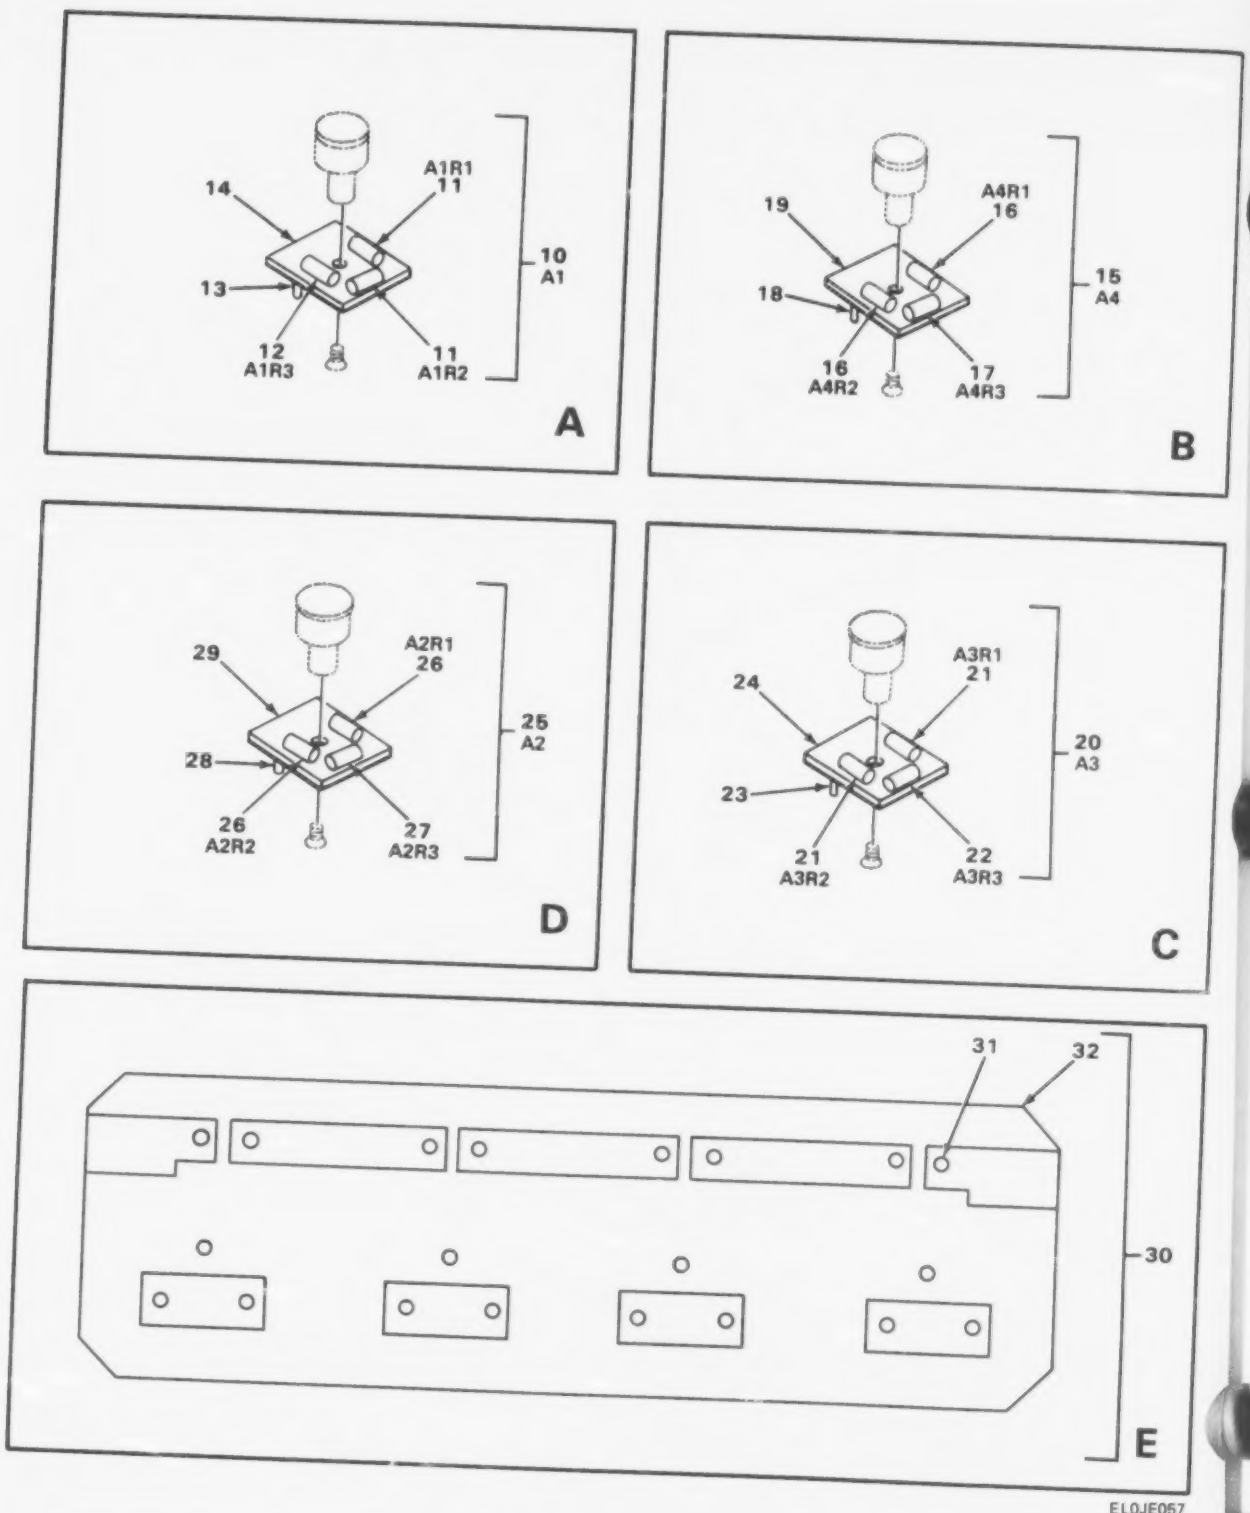

EL0JE057

FIGURE 24. AMPLITUDE STEP ATTENUATOR (SHEET 2 OF 2).

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0626 AMPLITUDE STEP ATTENUATOR		
24	1	PADZZ	5305-00-056-9961	96906	MS24693C4	SCREW,MACHINE	EA	2
24	2	XBDZZ		31196	3090000788	COVER,ATTENUATOR	EA	1
24	3	PADZZ	5305-00-054-5637	96906	MS51957-3	SCREW,MACHINE	EA	4
24	4	PADZZ	5935-01-016-9620	80063	SM-B-753706-1	CONNECTOR,RECPT	EA	2
24	5	XBDZZ		80063	SM-D-753699	ENCLOSURE,ATTEN	EA	1
24	6	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	2
24	7	PADZZ	5305-00-054-5647	96906	MS51957-13	SCREW,MACHINE	EA	2
24	8	PADZZ	5305-00-833-8624	96906	MS18212-13	SCREW,NYLON	EA	4
24	9	PADZZ	5355-01-164-8618	80063	SM-B-753818	KNOB,EXTRACTOR	EA	4
24	10	PADDD	5999-01-162-4684	80063	SM-C-753704-1	CIRCUIT CARD ASSY	EA	1
						GROUP 062601 CIRCUIT CARD ASSEMBLY		
24	11	PADZZ	5905-00-940-7163	81349	RN55D1150F	.RESISTOR,FIXED,FILM	EA	2
24	12	PADZZ	5905-00-138-4918	81349	RNC55K52R3FS	.RESISTOR,FIXED,FILM	EA	1
24	13	PADZZ	5940-00-350-4654	71279	460-2970-02	.CONTACT,ELECTRICAL	EA	4
24	14	XBDZZ		80063	SM-C-753838-1	.PRINTED WIRING BRD	EA	1
24	15	XBDDD		80063	SM-C-753704-4	CIRCUIT CARD ASSY	EA	1
						GROUP 062602 CIRCUIT CARD ASSEMBLY		
24	16	XBDZZ		81349	RN55D2110F	.RESISTOR,FIXED,FILM	EA	2
24	17	PADZZ	5905-00-997-1208	81349	RN55D23R7F	.RESISTOR,FIXED,FILM	EA	1
24	18	PADZZ	5940-00-350-4654	71279	2970-2	.CONTACT,ELECTRICAL	EA	4
24	19	XBDZZ		80063	SM-C-753838-4	.PRINTED WIRING BRD	EA	1
24	20	PADDD	5895-01-157-1971	80063	SM-C-753704-3	CIRCUIT CARD ASSY	EA	1
						GROUP 062603 CIRCUIT CARD ASSEMBLY		
24	21	PADZZ	5905-00-758-4802	81349	RNC55K4320FS	.RESISTOR,FIXED,FILM	EA	2
24	22	PADZZ	5905-00-997-1199	81349	RN55D11R5F	.RESISTOR,FIXED,FILM	EA	1
24	23	PADZZ	5940-00-350-4654	71279	2970-2	.CONTACT,ELECTRICAL	EA	4
24	24	XBDZZ		80063	SM-C-753838-3	.PRINTED WIRING BRD	EA	1
24	25	XBDDD		80063	SM-C-753704-2	CIRCUIT CARD ASSY	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 062604 CIRCUIT CARD ASSEMBLY		
24	26	PADZZ	5905-00-432-9157	81349	RNC55K8660FS	.RESISTOR,FIXED,FILM	EA	2
24	27	PADZZ	5905-00-121-9863	81349	RCR07G5R6JS	.RESISTOR,FXD,COMP	EA	1
24	28	PADZZ	5940-00-350-4654	71279	2970-2	.CONTACT,ELECTRICAL	EA	4
24	29	XBDZZ		80063	SM-C-753838-2	.PRINTED WIRING BRD	EA	1
24	30	XBDZZ		80063	SM-D-753839	CIRCUIT CARD ASSY	EA	1
24	31	PADZZ	5935-00-191-5434	71279	450-3388-01-03	CONTACT,ELECTRICAL	EA	20
24	32	XBDZZ		80063	SM-D-753841	PRINTED WIRING BRD	EA	1

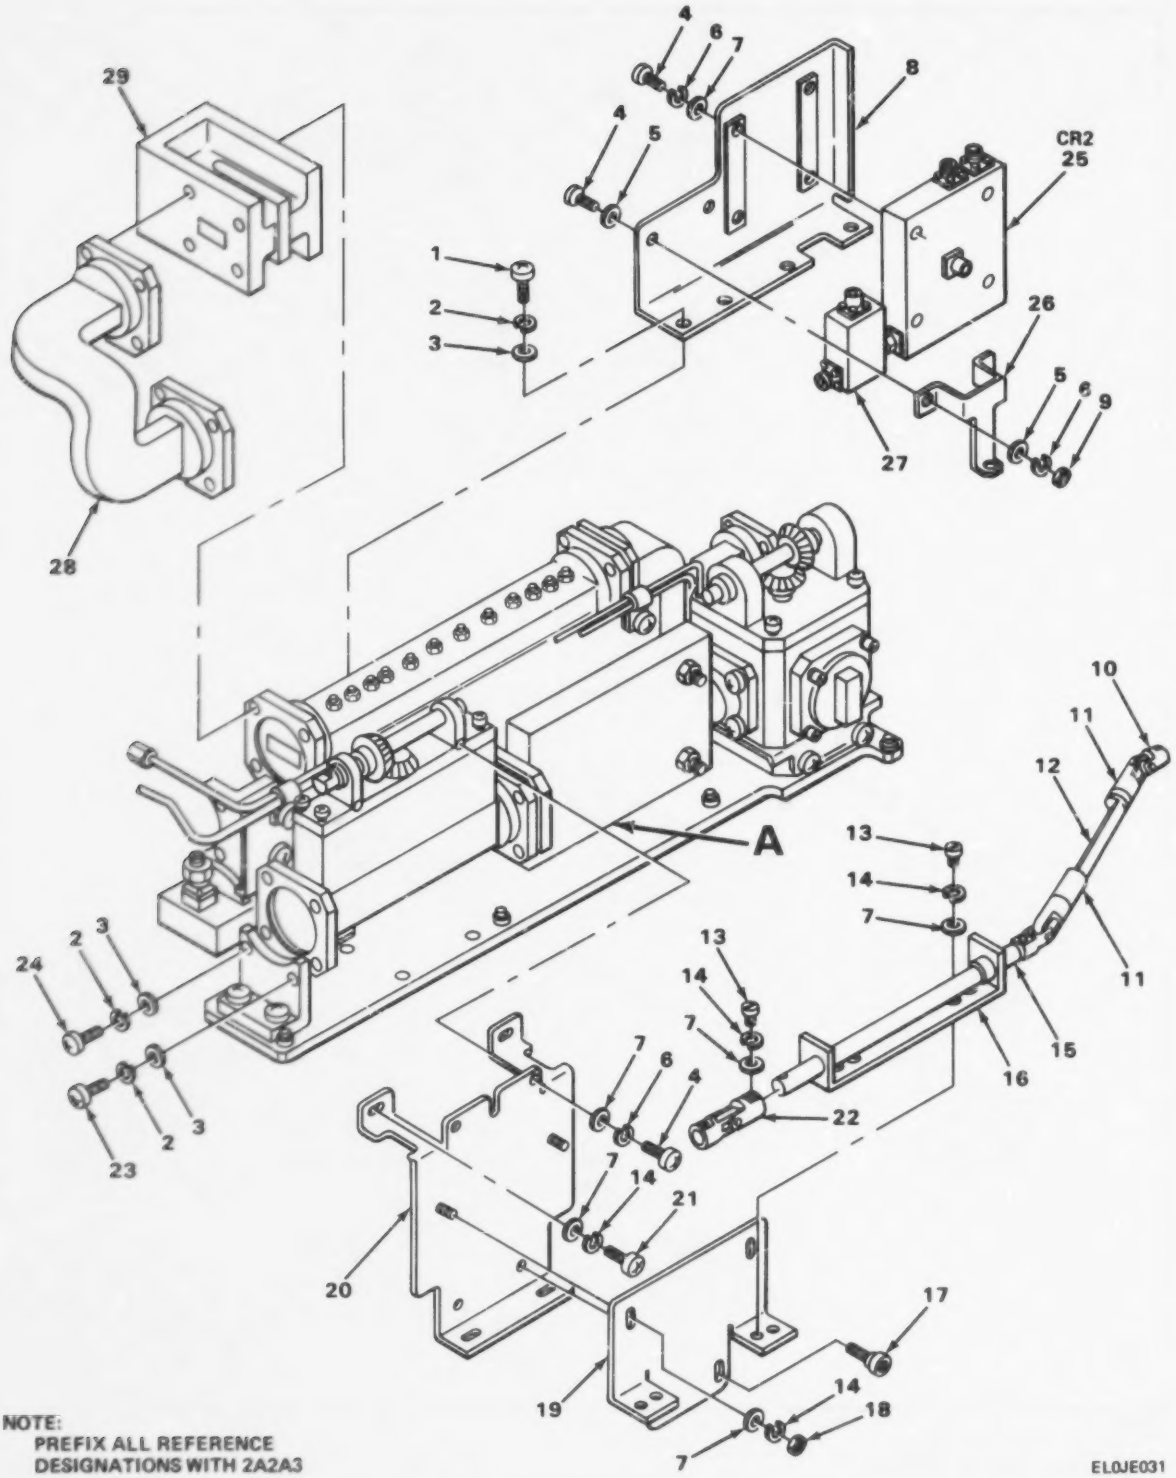

FIGURE 25. MICROWAVE ASSEMBLY, RF (SHEET 1 OF 4).

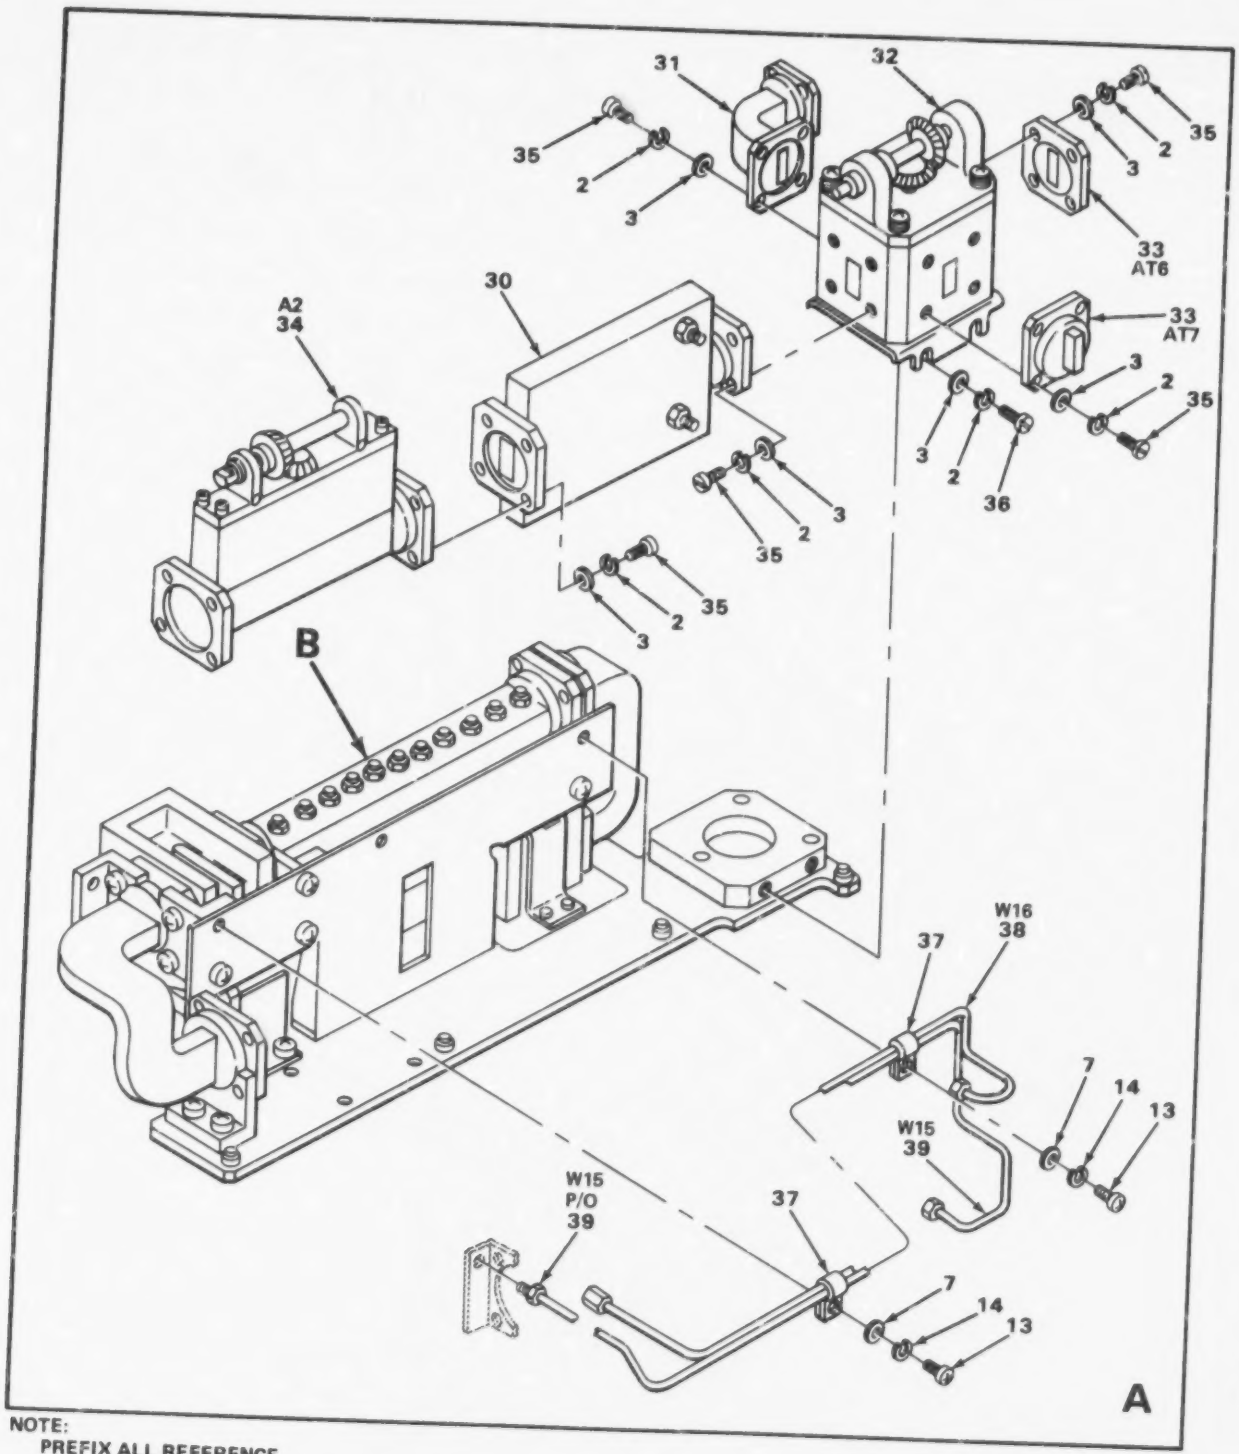

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A3

ELOJE032

FIGURE 25. MICROWAVE ASSEMBLY, RF (SHEET 2 OF 4).

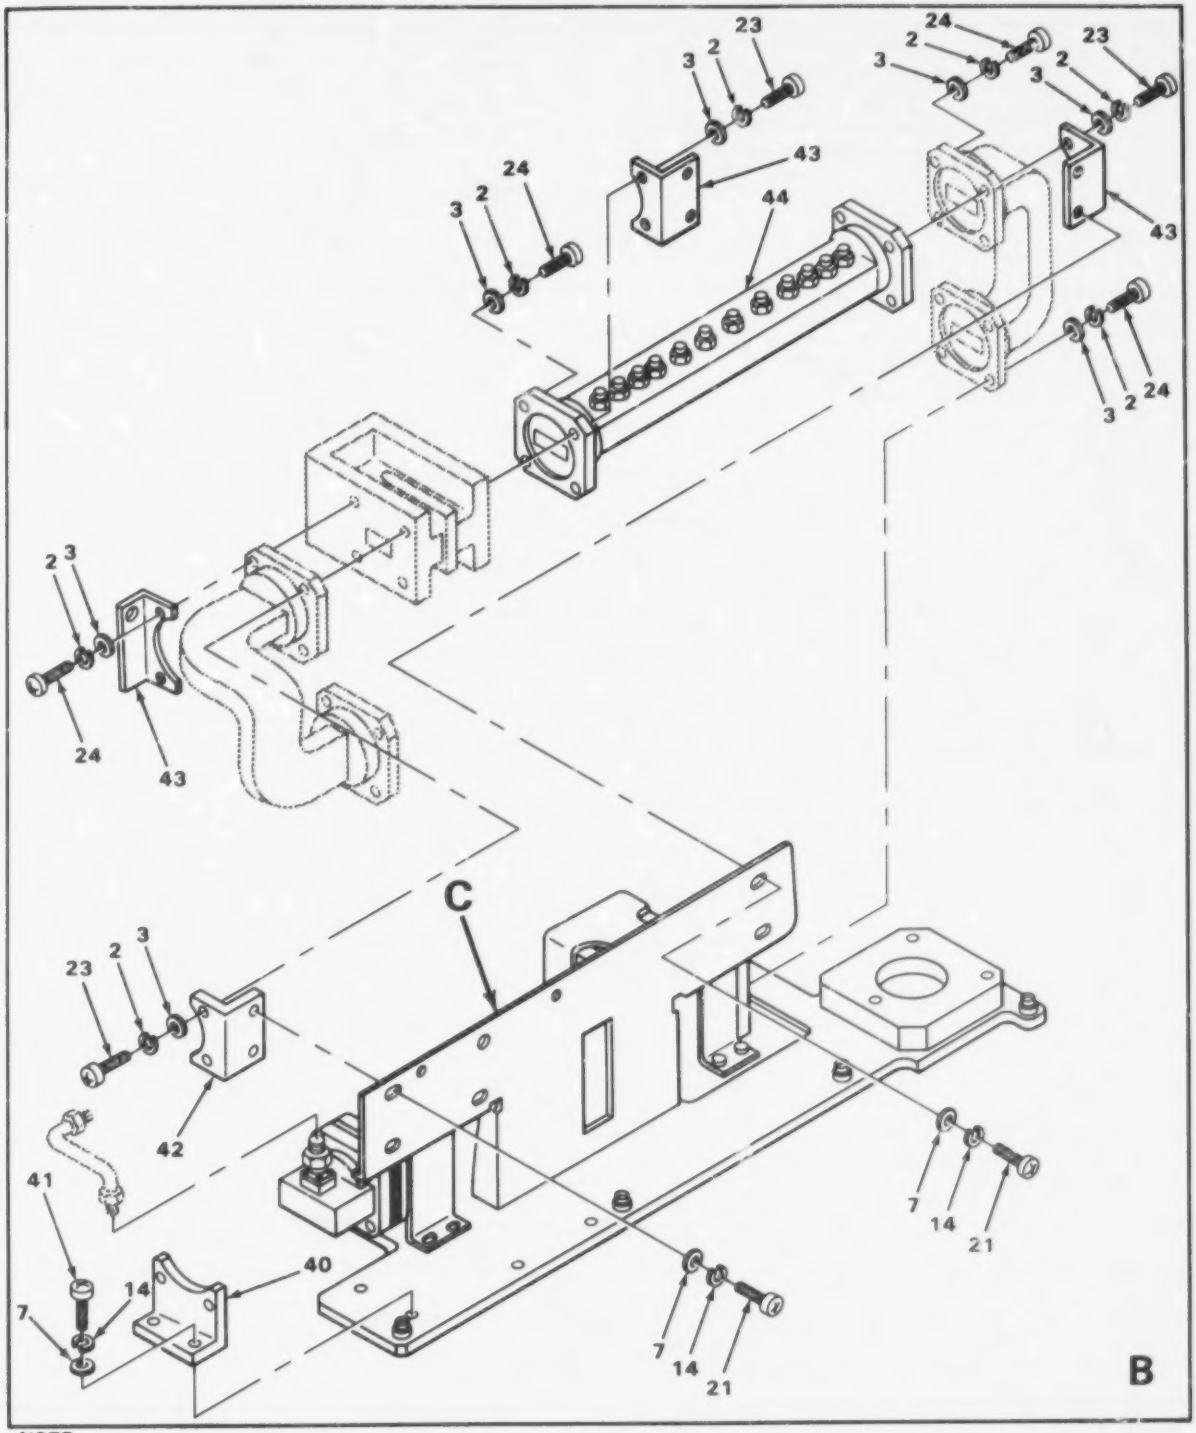

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A3

EL0JE033

FIGURE 25. MICROWAVE ASSEMBLY, RF (SHEET 3 OF 4).

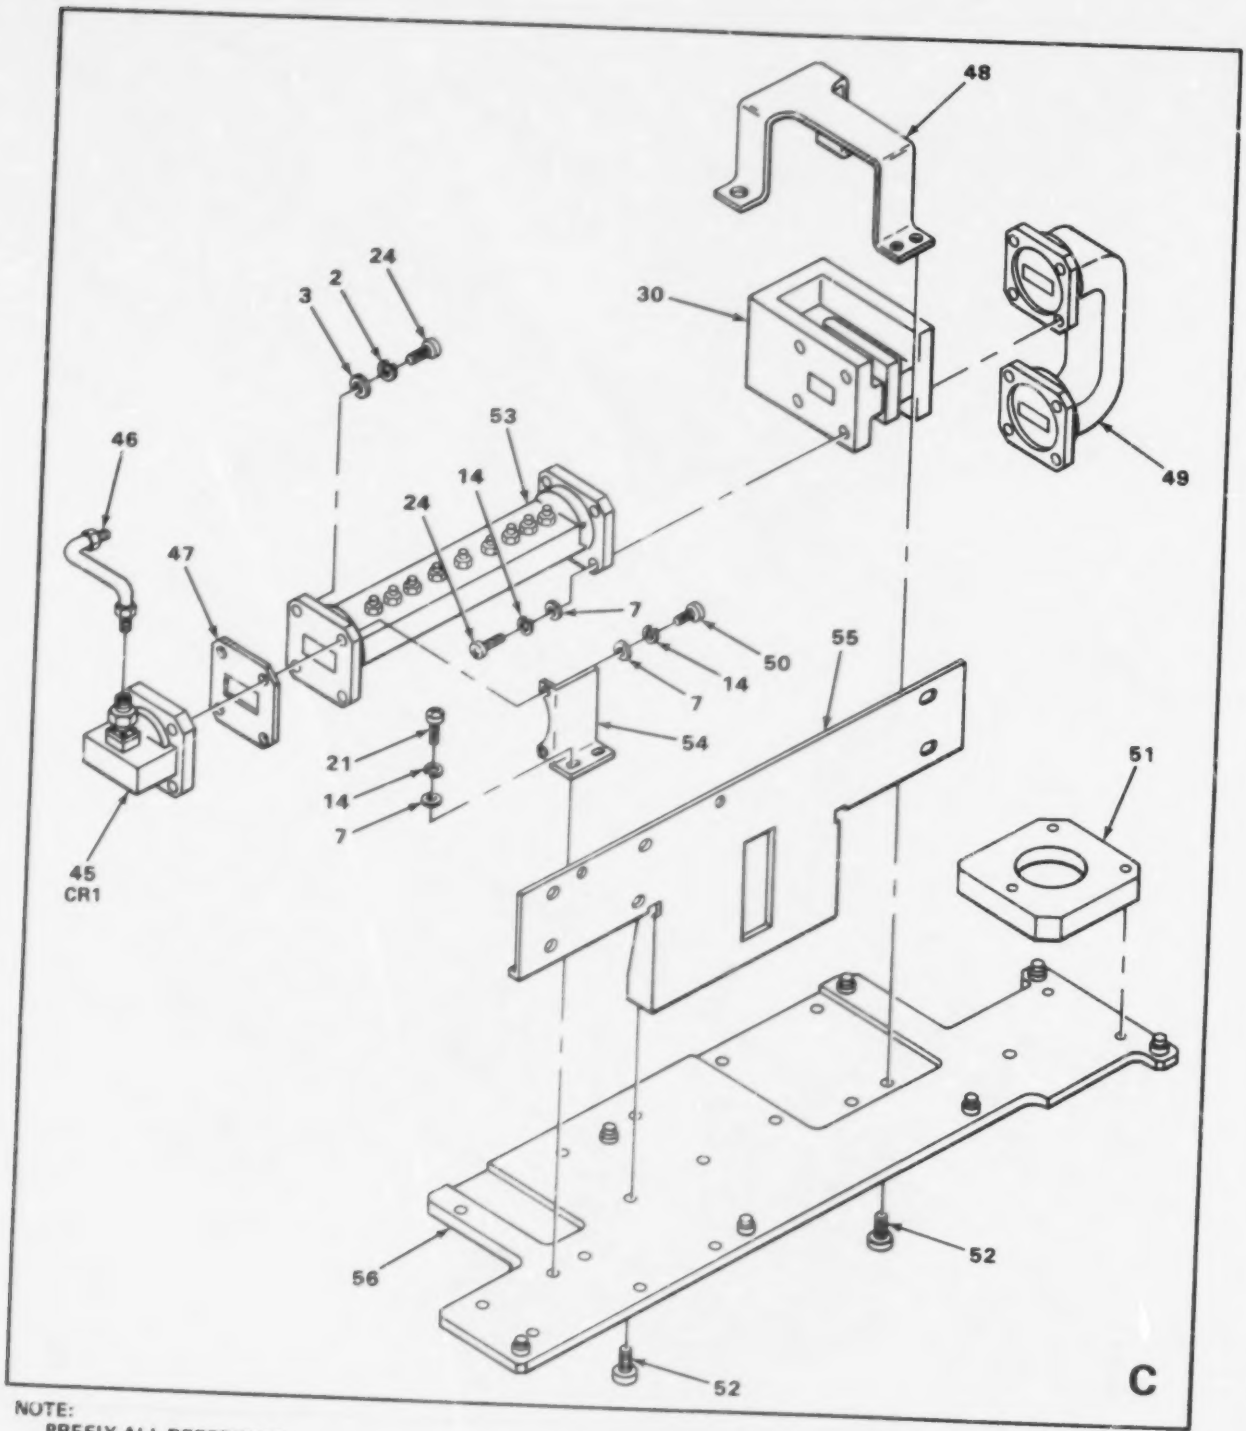

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A3

EL0JE053

FIGURE 25. MICROWAVE ASSEMBLY, RF (SHEET 4 OF 4).

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0627 MICROWAVE ASSEMBLY, RF		
25	1	PADZZ	5305-00-054-6668	96906	MS51957-43	SCREW,MACHINE	EA	3
25	2	PADZZ	5310-00-933-8119	96906	MS35338-137	WASHER,LOCK	EA	57
25	3	PADZZ	5310-00-804-0141	96906	MS15795-801	WASHER,FLAT	EA	57
25	4	PADZZ	5305-00-054-5648	96906	MS51957-14	SCREW,MACHINE	EA	8
25	5	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	16
25	6	PADZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	11
25	7	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT	EA	21
25	8	XBDZZ		80063	SM-C-753730	BRKT,COMPONENT MTG	EA	1
25	9	PAFZZ	5310-00-938-2013	96906	MS35649-224	NUT,PLAIN HEXAGON	EA	3
25	10	PADZZ	5305-00-531-0137	96906	MS51021-21	SETSCREW	EA	8
25	11	PADZZ	3010-01-017-7150	80063	SM-B-753877	UNIVERSAL JOINT	EA	2
25	12	XBDZZ		80063	SM-C-754051	SHAFT,DRIVE	EA	1
25	13	PADZZ	5305-00-054-6654	96906	MS51957-30	SCREW,MACHINE	EA	7
25	14	PADZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	25
25	15	XBDZZ		80063	SM-B-754047	SHAFT,STRAIGHT	EA	1
25	16	XBDZZ		80063	SM-B-753873	SUPPORT,SHAFT DRIVE	EA	1
25	17	XBDZZ		29964	43D10	SCREW,SHOULDER	EA	2
25	18	PADZZ	5310-00-934-9761	96906	MS35649-264	NUT,PLAIN HEXAGON	EA	2
25	19	XBDZZ		80063	SM-C-754049	BRACKET,ANGLE	EA	1
25	20	XBDZZ		80063	SM-C-753883	SUPPORT,ATTENUATOR	EA	1
25	21	PADZZ	5305-00-992-5837	96906	MS16995-17	SCREW,MACHINE	EA	10
25	22	PADZZ	3010-01-017-6417	80063	SM-B-754099	UNIVERSAL JOINT	EA	1
25	23	PADZZ	5305-00-988-7605	96906	MS16995-29	SCREW,MACHINE	EA	8
25	24	PADZZ	5305-00-988-7603	96906	MS16995-27	SCREW,MACHINE	EA	18
25	25	XBDDD		18203	MIA06	MIXER,CRYSTAL COAX	EA	1
						GROUP 062701 RF MIXER		
25	26	XBDZZ		80063	SM-B-753729	.BRACKET,DOUBLE ANGL	EA	1
25	27	XBDZZ		31196	1130001083	.CIRCULATOR,COAXIAL	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
25	28	PADZZ	5985-01-017-7102	09992	AR3128	.WAVEGUIDE ASSY	EA	1
25	29	XBDZZ		14830	CXH135	.CIRCULATOR,WAVEGUID	EA	2
25	30	XBDZZ		28916	SC1120	.COUPLER,DIRECTIONAL	EA	1
25	31	PADZZ	5985-01-143-3125	09992	AR3129	.WAVEGUIDE ASSY	EA	1
25	32	XBDZZ		11396	1130001331	.SWITCH ASSY,WG	EA	1
25	33	PADZZ	5895-01-017-5775	49956	LXM10	.FLANGE,WAVEGUIDE	EA	2
25	34	PADZZ	5985-00-124-8763	80063	SM-C-753813	WAVEGUIDE ASSY,ATT	EA	1
25	35	PADZZ	5305-00-988-7602	96906	MS16995-26	SCREW,MACHINE	EA	20
25	36	PADZZ	5305-00-992-5854	96906	MS16995-25	SCREW,MACHINE	EA	4
25	37	PADZZ	5340-00-988-3210	96906	MS25281R4	CLAMP,LOOP	EA	2
25	38	PADZZ	5995-01-017-0257	80063	SM-D-753921	CABLE ASSY,RAD FREQ	EA	1
25	39	XBDZZ		80063	SM-D-753920	CABLE ASSY,RAD FREQ	EA	1
25	40	XBDZZ		80063	SM-B-753627	SUPPORT,WAVEGUIDE	EA	1
25	41	PADZZ	5305-00-992-5847	96906	MS16995-18	SCREW,MACHINE	EA	2
25	42	XBDZZ		80063	SM-B-753836	BRACKET,ELEC CONN	EA	1
25	43	XBDZZ		80063	SM-B-753626	SUPPORT,WAVEGUIDE	EA	3
25	44	XBDDD		31196	1130000054	FILTER,BANDPASS	EA	1
						GROUP 062702 FILTER,BANDPASS		
25	45	XBDZZ		01456	112AC189	.ADAPTER,WAVEGUIDE	EA	1
25	46	PADZZ	5995-01-017-6408	80063	SM-C-753919	.CABLE ASSY,RAD FREQ	EA	1
25	47	PADZZ	5895-01-017-5770	80063	SM-B-753823	.COVER,FLANGE WAVEGUIDE	EA	1
25	48	XBDZZ		80063	SM-C-753648	.SUPPORT,CIRCULATOR	EA	1
25	49	PADZZ	5985-01-016-9590	09992	AR3130	.WAVEGUIDE ASSEMBLY	EA	1
25	50	PADZZ	5305-00-992-5907	96906	MS16995-28	.SCREW,MACHINE	EA	2
25	51	XBDZZ		80063	SM-C-753643	.SUPPORT,WAVEGUIDE	EA	1
25	52	PADZZ	5305-00-719-5064	96906	MS51959-30	.SCREW,MACHINE	EA	7
25	53	XBDDD		31196	1130000053	FILTER,BANDPASS	EA	1
						GROUP 062703 FILTER,BANDPASS		
25	54	XBDZZ		80063	SM-C-753728	.BRKT,WAVEGUIDE SUPT	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
25	55	XBDZZ		80063	SM-D-753631	.BRKT,WAVEGUIDE SUPT.....	EA	1
25	56	XBDZZ		80063	SM-D-753637	.PLATE,WAVEGUIDE MTG.....	EA	1

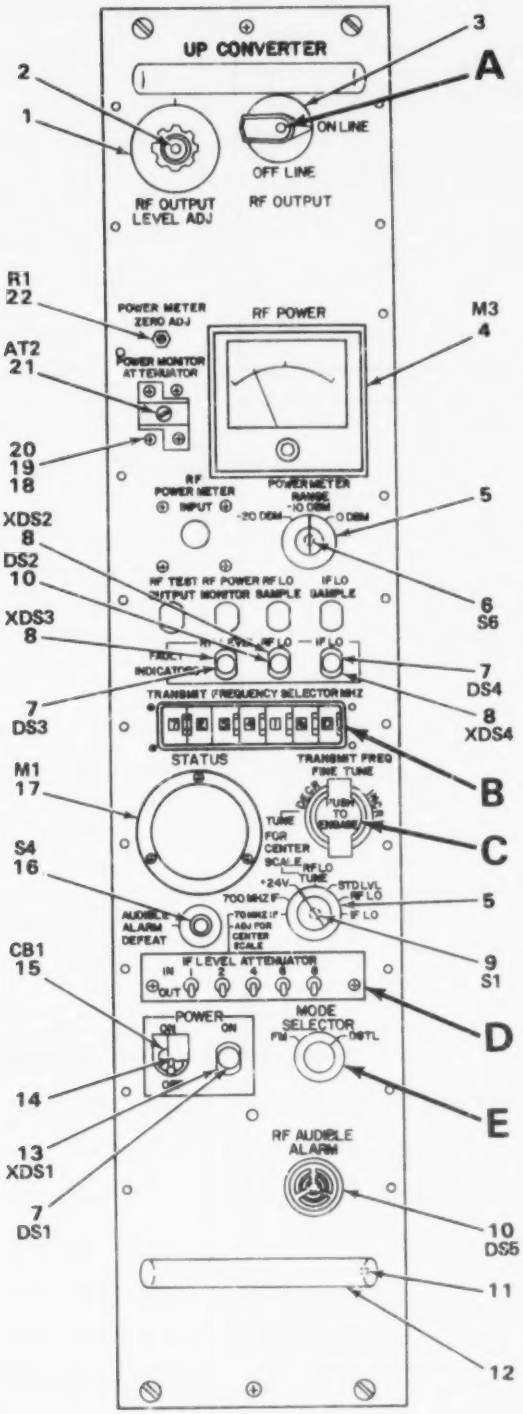

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A11

EL0JE034

FIGURE 26. PANEL ASSEMBLY, FRONT (SHEET 1 OF 2).

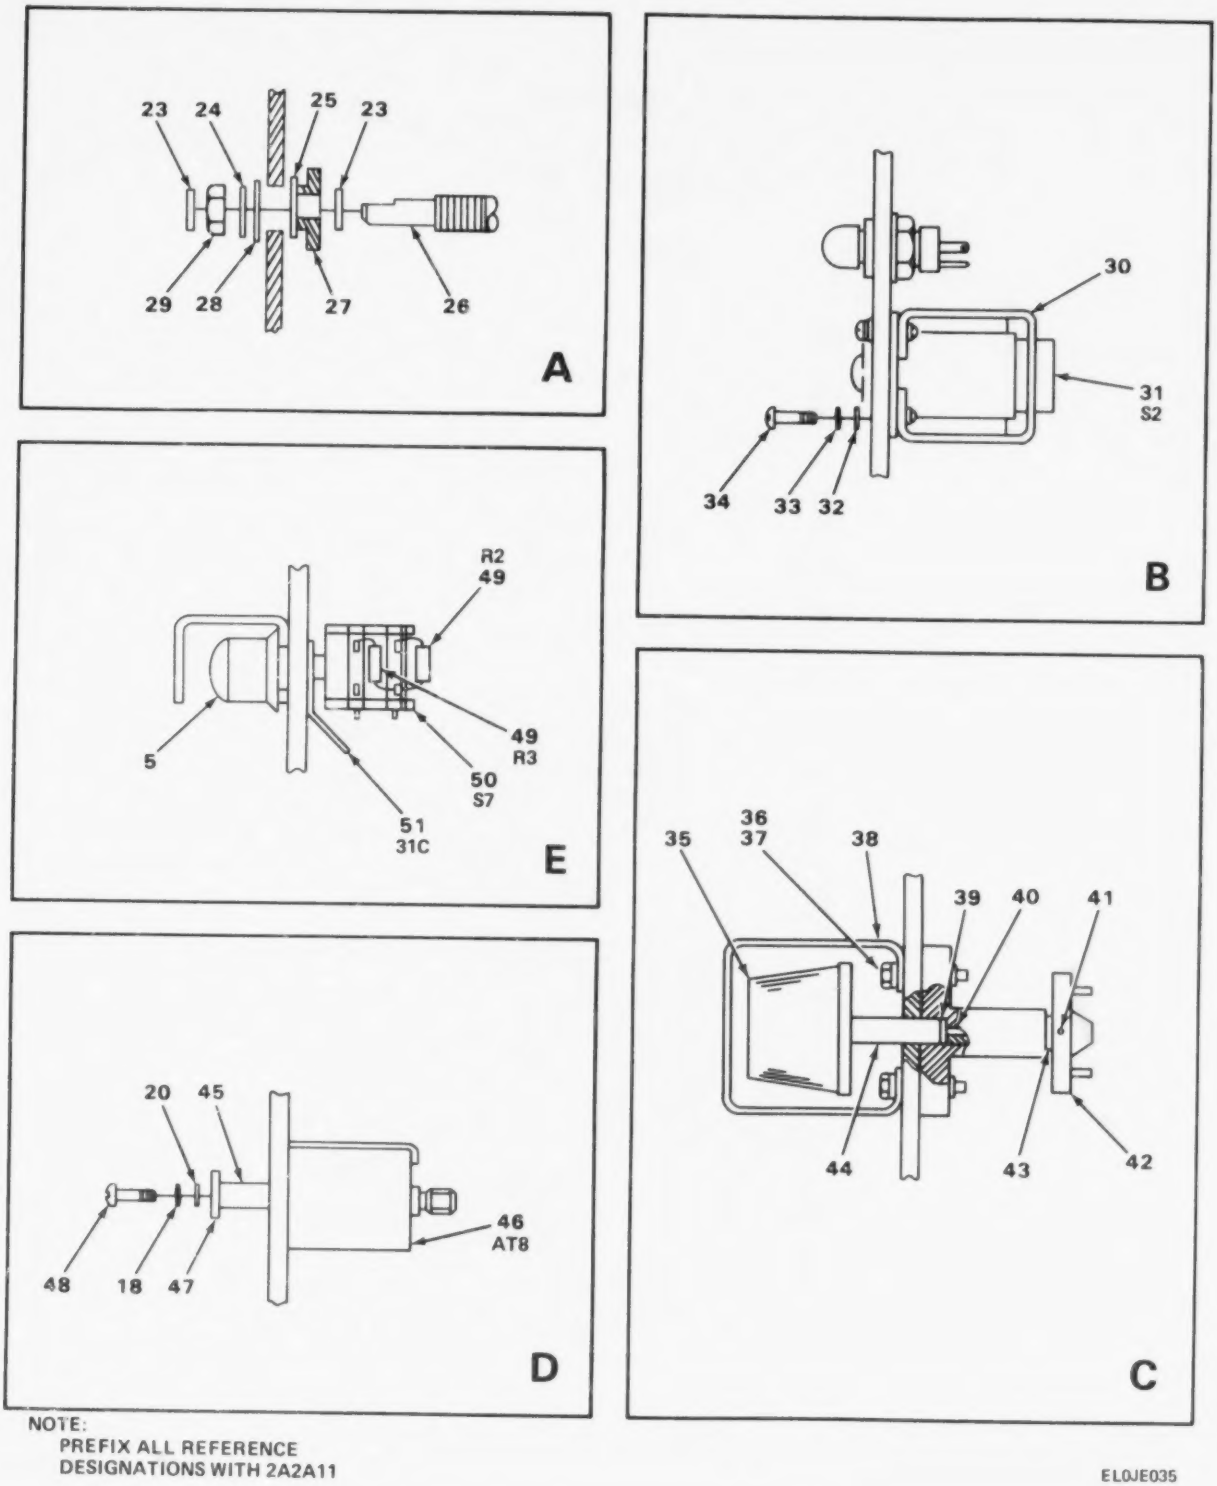

FIGURE 26. PANEL ASSEMBLY, FRONT (SHEET 2 OF 2).

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0628 PANEL ASSEMBLY, FRONT		
26	1	XBFZZ		00929	155A44-406	DIAL,CONTROL	EA	1
26	2	XBFZZ		80063	SM-B-753507-2	SHAFT,SHOULDERED	EA	1
26	3	PAFZZ	5355-00-985-6888	96906	MS91528-2M2B	KNOB	EA	1
26	4	PAFZZ	6625-01-011-7246	04901	42AS3-3	METER,POWER RELAY	EA	1
26	5	PAFZZ	5355-00-680-1357	96906	MS91528-1F2B	KNOB	EA	3
26	6	XBFZZ		04901	312	SWITCH,ROTARY	EA	1
26	7	PAFZZ	6240-00-155-7836	96906	MS25237-327	LAMP,INCANDESCENT	EA	4
26	8	PAFZZ	6210-00-840-0850	72619	812-1030-0971-506	LIGHT,INDICATOR	EA	3
26	9	PAFZZ	5930-00-626-2917	31196	1130000200	SWITCH,ROTARY	EA	1
26	10	PAFZZ	6350-00-102-4210	90201	SC628	ALARM,AUDIBLE	EA	1
26	11	PAFZZ	5305-00-071-1322	96906	MS51960-65	SCREW,MACHINE	EA	4
26	12	PAFZZ	5340-00-840-0114	71279	2111-2-12	HANDLE,BOW	EA	2
26	13	XBFZZ		72619	812-1030-0975-50	LIGHT,INDICATOR	EA	1
26	14	PAFZZ	5925-01-145-6306	80063	SM-B-753690-1	SHIELD,CIRCUIT BRKR	EA	1
26	15	XBFZZ		81349	M39014-4-38	CIRCUIT BREAKER	EA	1
26	16	PAFZZ	5930-00-501-1749	96906	MS25089-3C	SWITCH,PUSH	EA	1
26	17	PAFZZ	6625-01-111-0506	77221	621-16815	AMMETER,SPECIAL	EA	1
26	18	PAFZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	6
26	19	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT	EA	6
26	20	PAFZZ	5305-00-054-6654	96906	MS51957-30	SCREW,MACHINE	EA	2
26	21	PAFZZ	5985-01-111-0480	00929	AJB09	ATTENUATOR,VARIABLE	EA	1
26	22	PAFZZ	5905-00-630-6263	04901	42AS3-5	RESISTOR,VARIABLE	EA	1
26	23	PAFZZ	5365-00-298-6564	00141	Z2-3	RING,RETAINING	EA	4
26	24	PAFZZ	5310-00-773-7618	96906	MS15795-814	WASHER,FLAT	EA	2
26	25	XBFZZ		80063	SM-B-753464-2	BUSHING	EA	2
26	26	XBFZZ		80063	SM-B-754048	SHAFT,SHOULDERED	EA	1
26	27	XBFZZ		18565	10-00-2232-1224	PACKING,PREFORMED	EA	2

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
26	28	PAFZZ		96906	MS35338-76	WASHER,LOCK	EA	2
26	29	PAFZZ		96906	MS20582C20	NUT,PLAIN HEXAGON	EA	4
26	30	XBFZZ		80063	SM-C-753479	BRACKET,SWITCH	EA	1
26	31	PAFZZ	5895-00-124-8754	80063	SM-A-753271	SWITCH,CODE IND	EA	1
26	32	PAFZZ	5310-00-595-6761	96906	MS15795-802	WASHER,FLAT	EA	4
26	33	PAFZZ	5310-00-928-2690	96906	MS35338-134	WASHER,LOCK	EA	4
26	34	PAFZZ	5305-00-054-5641	96906	MS51957-7	SCREW,MACHINE	EA	4
26	35	PAFZZ	5355-01-020-3111	99813	101357	KNOB,SLIP CLUTCH	EA	1
26	36	XBFZZ		70318	6-32X3-4	SCREW,MACHINE	EA	2
26	37	PAFZZ	5310-00-880-5978	96906	MS15795-807	WASHER,FLAT	EA	2
26	38	XBFZZ		80063	SM-C-754453	GUARD,KNOB,TUNING	EA	1
26	39	XBFZZ		80063	SM-B-754430	WASHER,THRUST	EA	1
26	40	PAFZZ	5360-00-517-6225	84830	LC032C6SS	SPRING,COMPRESSION	EA	1
26	41	PAFZZ	5305-00-800-7261	96906	MS51021-9	SETSCREW	EA	2
26	42	XBFZZ		80063	SM-C-754350	DRIVER,TUNING	EA	1
26	43	PAFZZ	5365-00-432-3584	96906	MS16624-5018-1	RING,RETAINING	EA	1
26	44	XBFZZ		80063	SM-C-754329-2	SHAFT,SHOULDERED	EA	1
26	45	PAFZZ	5365-00-008-2065	06540	9228SS171-7	SPACER,SLEEVE	EA	2
26	46	PAFDD	5985-01-016-9599	80063	SM-C-753444	ATTENUATOR ASSEMBLY (SEE FIGURE 27 FOR BREAKDOWN)	EA	1
26	47	XBFZZ		80063	SM-B-753680	SHIELD,ATTENUATOR	EA	1
26	48	PAFZZ	5305-00-054-6658	96906	MS51957-34	SCREW,MACHINE	EA	2
26	49	PAFZZ	5905-00-110-0196	81349	RCR20G102JS	RESISTOR,FIXED,COMP	EA	2
26	50	XBFZZ		31336	1090F202-2NP	SWITCH,ROTARY	EA	1
26	51	PAFZZ	5940-00-959-4487	78189	2440-20-03	TERMINAL,LUG	EA	2

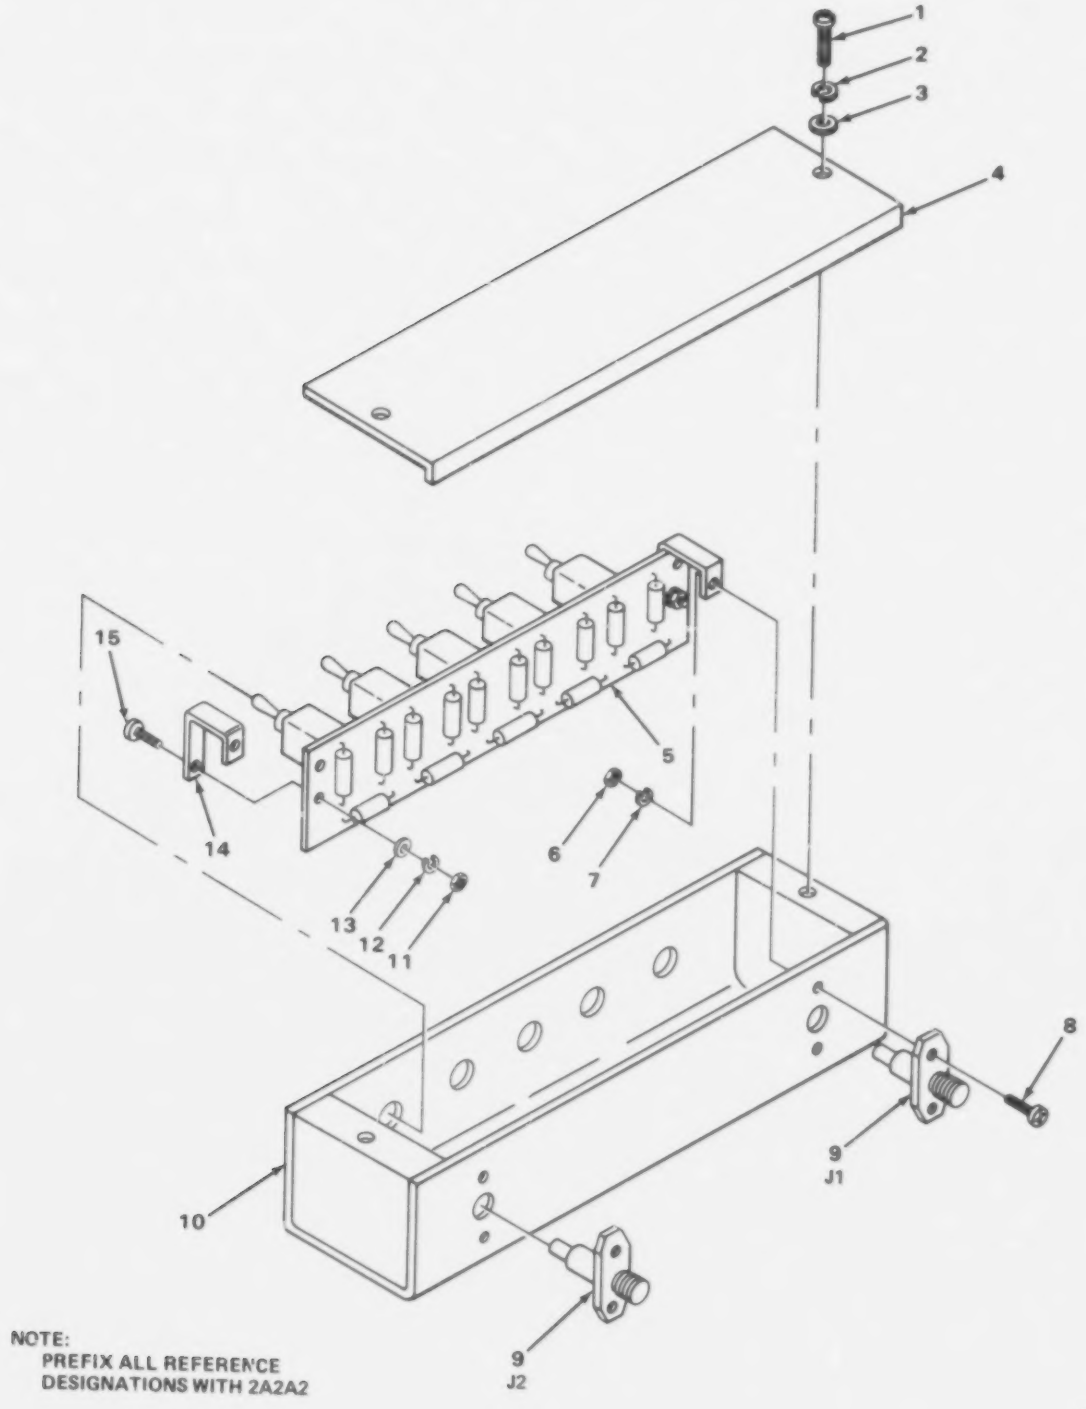

FIGURE 27. IF LEVEL ATTENUATOR.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 062901 :F LEVEL ATTENUATOR		
27	1	PADZZ	5305-00-054-5648	96906	MS51957-14	SCREW,MACHINE	EA	2
27	2	PADZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	2
27	3	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	2
27	4	XBDZZ		80063	SM-B-753449	COVER,ATTENUATOR	EA	1
27	5	XBDDD		80063	SM-D-753443	CIRCUIT CARD ASSY (SEE FIGURE 28 FOR BREAKDOWN)	EA	1
27	6	PADZZ	5310-00-938-2013	96906	MS35649-224	NUT,PLAIN,HEXAGON	EA	4
27	7	PADZZ	5310-00-928-2690	96906	MS35338-134	WASHER,LOCK	EA	4
27	8	PADZZ	5305-00-054-5638	96906	MS51957-4	SCREW,MACHINE	EA	4
27	9	PADZZ	5935-01-005-6444	26805	2950-6156	CONNECTOR	EA	2
27	10	XBDZZ		80063	SM-C-753446	ENCLOSURE,ATTENUATO	EA	1
27	11	PADZZ	5310-00-050-3275	72962	52NU-040	NUT,STOP	EA	4
27	12	PADZZ	5310-00-582-5965	96906	MS35338-44	WASHER,LOCK	EA	4
27	13	PADZZ	5310-00-809-4058	96906	MS27183-10	WASHER,FLAT	EA	4
27	14	XBDZZ		80063	SM-B-753448	TERMINAL STRIP,GRND	EA	2
27	15	PADZZ	5305-00-071-2241	96906	MS90725-10	SCREW,CAP,HEXAGON H	EA	4

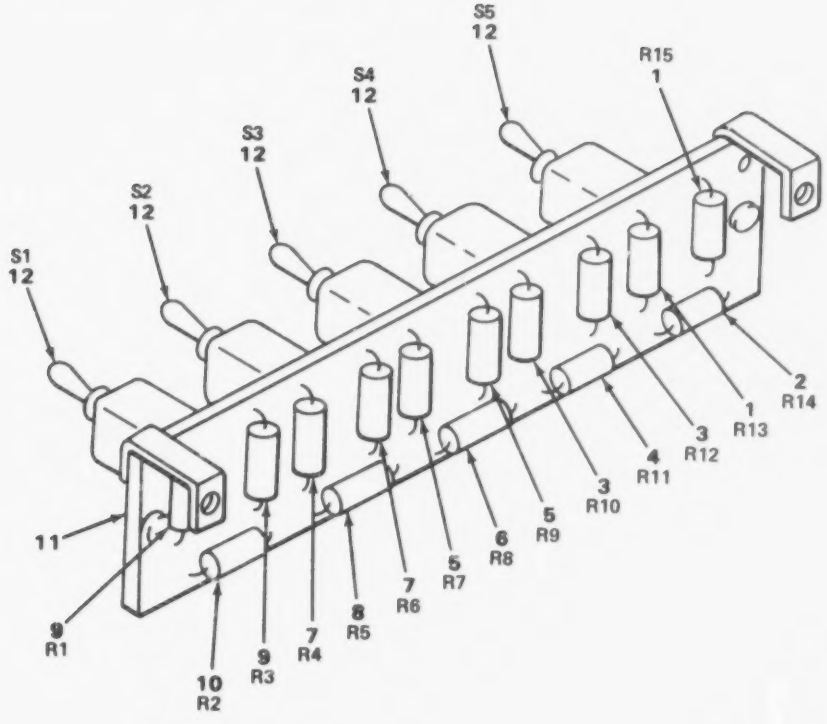

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2A2A1

EL0JE037

FIGURE 28. CIRCUIT CARD ASSEMBLY.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 06280101 CIRCUIT CARD ASSEMBLY		
28	1	PADZZ	5905-00-067-3244	81349	RN60D8660F	RESISTOR,FIXED,FILM	EA	2
28	2	PADZZ	5905-00-121-9863	81349	RCR07G5R6JS	RESISTOR,FIXED,COMP	EA	1
28	3	PADZZ	5905-00-952-6824	81349	RN60D4320F	RESISTOR,FIXED,FILM	EA	2
28	4	XBDZZ		81349	RN60D11RSF	RESISTOR,FIXED,FILM	EA	1
28	5	PADZZ	5905-00-984-1463	81349	RN60D2210F	RESISTOR,FIXED,FILM	EA	2
28	6	PADZZ	5905-00-764-4108	81349	RN60D23R7F	RESISTOR,FIXED,FILM	EA	1
28	7	PADZZ	5905-00-984-7685	81349	RN60D1500F	RESISTOR,FIXED,FILM	EA	2
28	8	PADZZ	5905-00-087-3408	81349	RN60D37R4F	RESISTOR,FIXED,FILM	EA	1
28	9	PADZZ	5905-00-763-8282	81349	RN60D1150F	RESISTOR,FIXED,FILM	EA	2
28	10	PADZZ	5905-00-763-9311	81349	RN60D52R3F	RESISTOR,FIXED,FILM	EA	1
28	11	XBDZZ		80063	SM-D-753445	PRINTED WIRING BRD	EA	1
28	12	PADZZ	5930-01-123-7898	09353	7201SH3CQ1	SWITCH,TOGGLE	EA	5

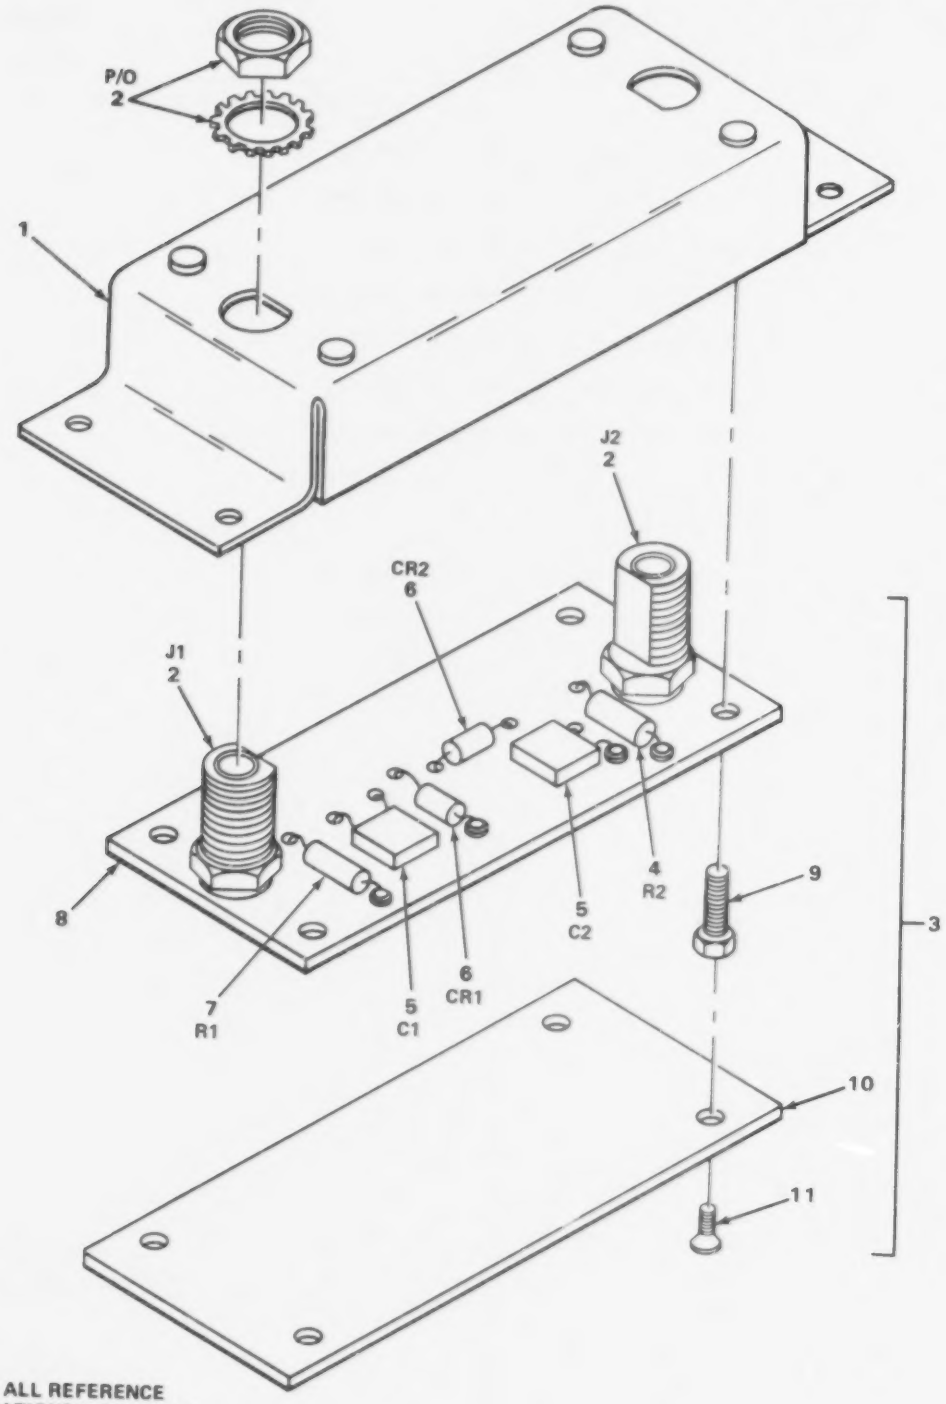

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A7

EL0JE038

FIGURE 29. 70 MHZ DETECTOR.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0629 70 MHZ DETECTOR		
29	1	XBDZZ		80063	SM-C-753597	CHASSIS,DETECTOR	EA	1
29	2	PADZZ	5935-01-016-8610	26805	2056-0000-02	CONNECTOR,PLUG ELEC	EA	2
29	3	XBDDD		80063	SM-C-753598	CIRCUIT CARD ASSY	EA	1
						GROUP 062901 CIRCUIT CARD ASSEMBLY		
29	4	PADZZ	5905-00-110-0388	81349	RCR07G104JS	.RESISTOR,FIXED,COMP	EA	1
29	5	PADZZ	5910-00-111-4811	81349	CK05BX103K	.CAPACITOR,FIXED,CER	EA	2
29	6	PADZZ	5961-00-232-3279	81349	JAN1N5711	.SEMICONDUCTOR,DIODE	EA	2
29	7	PADZZ	5905-00-106-1249	81349	RCR07G510JS	.RESISTOR,FIXED,COMP	EA	1
29	8	XBDZZ		80063	SM-C-753599	.PRINTED WIRING BRD	EA	1
29	9	PADZZ	5340-01-011-4122	80063	SM-B-753623	POST,ELECTRO-MECH	EA	4
29	10	XBDZZ		80063	SM-B-753624	COVER	EA	1
29	11	PADZZ	5305-00-766-2422	96906	MS51959-1	SCREW,MACHINE	EA	4

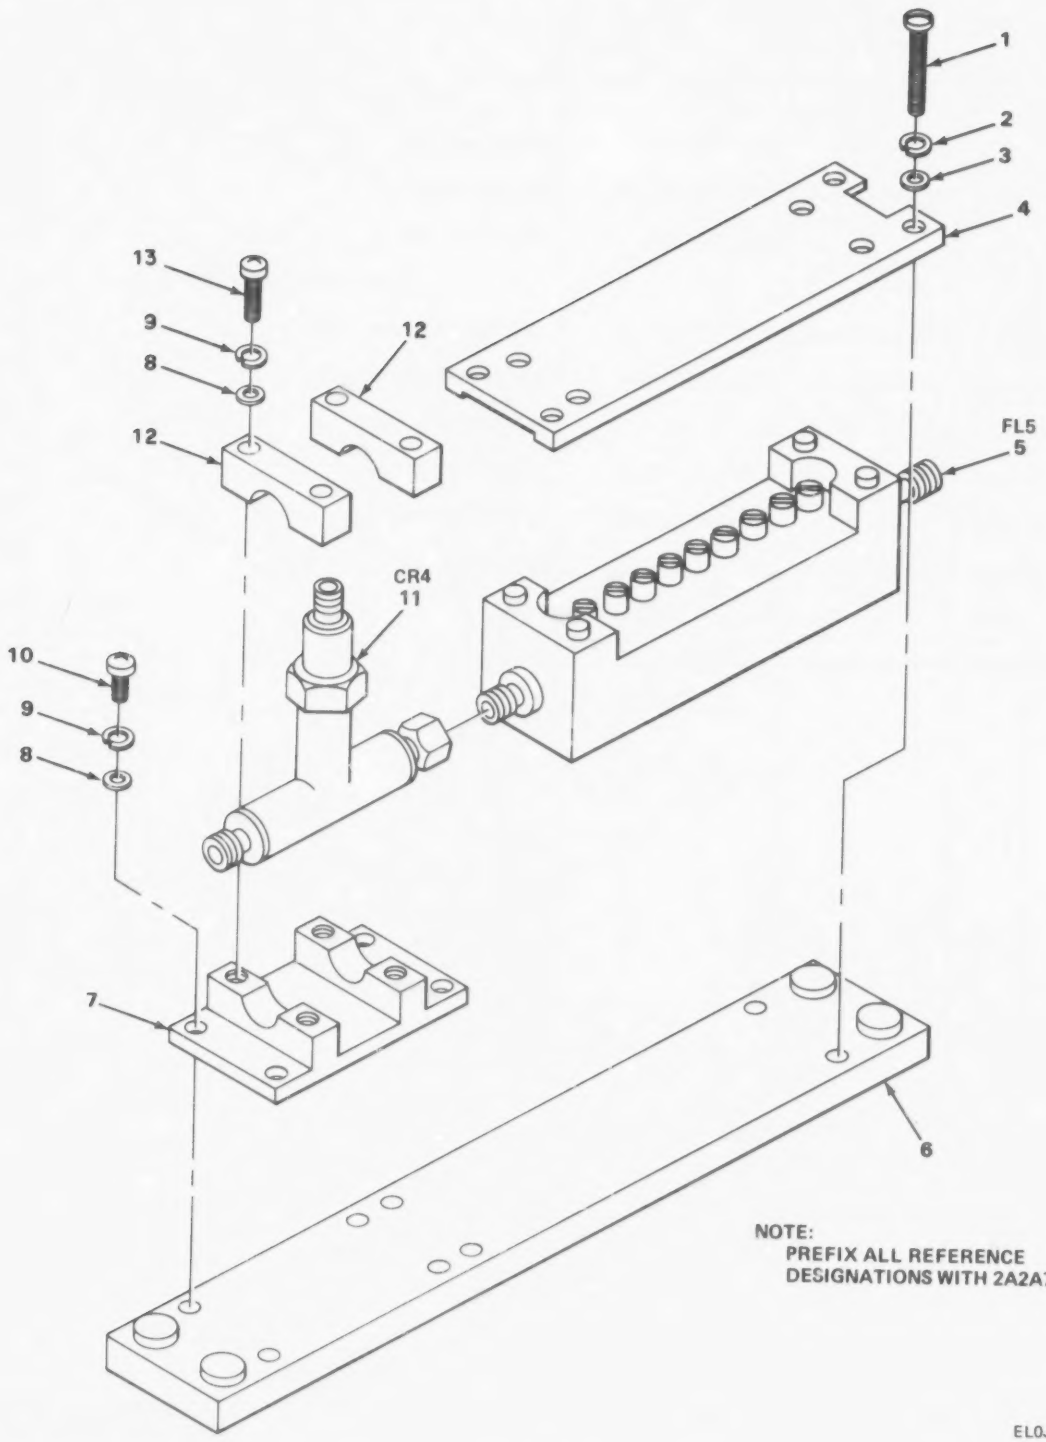

FIGURE 30. FILTER MONITOR ASSEMBLY.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0630 FILTER-MONITOR ASSEMBLY		
30	1	PADZZ	5305-00-054-6659	96906	MS51957-35	SCREW,MACHINE	EA	4
30	2	PADZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	4
30	3	PADZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT	EA	4
30	4	XBDZZ		80063	SM-B-753646	RETAINER,FILTER	EA	1
30	5	XBDDA		31196	1130000031	FILTER,BANDPASS	EA	1
30	6	XBDZZ		80063	SM-C-753647	PLATE,MOUNTING	EA	1
30	7	XBDZZ		80063	SM-C-753552	SUPPORT,RAD FREQ	EA	1
30	8	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	8
30	9	PADZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	8
30	10	PADZZ	5305-00-054-5649	96906	MS51957-15	SCREW,MACHINE	EA	4
30	11	XBDZZ		31196	11300000407	MONITOR,RADIO FREQ	EA	1
30	12	XBDZZ		80063	SM-B-753735	CLAMP,MONITOR	EA	2
30	13	PADZZ	5305-00-054-5652	96906	MS51957-18	SCREW,MACHINE	EA	4

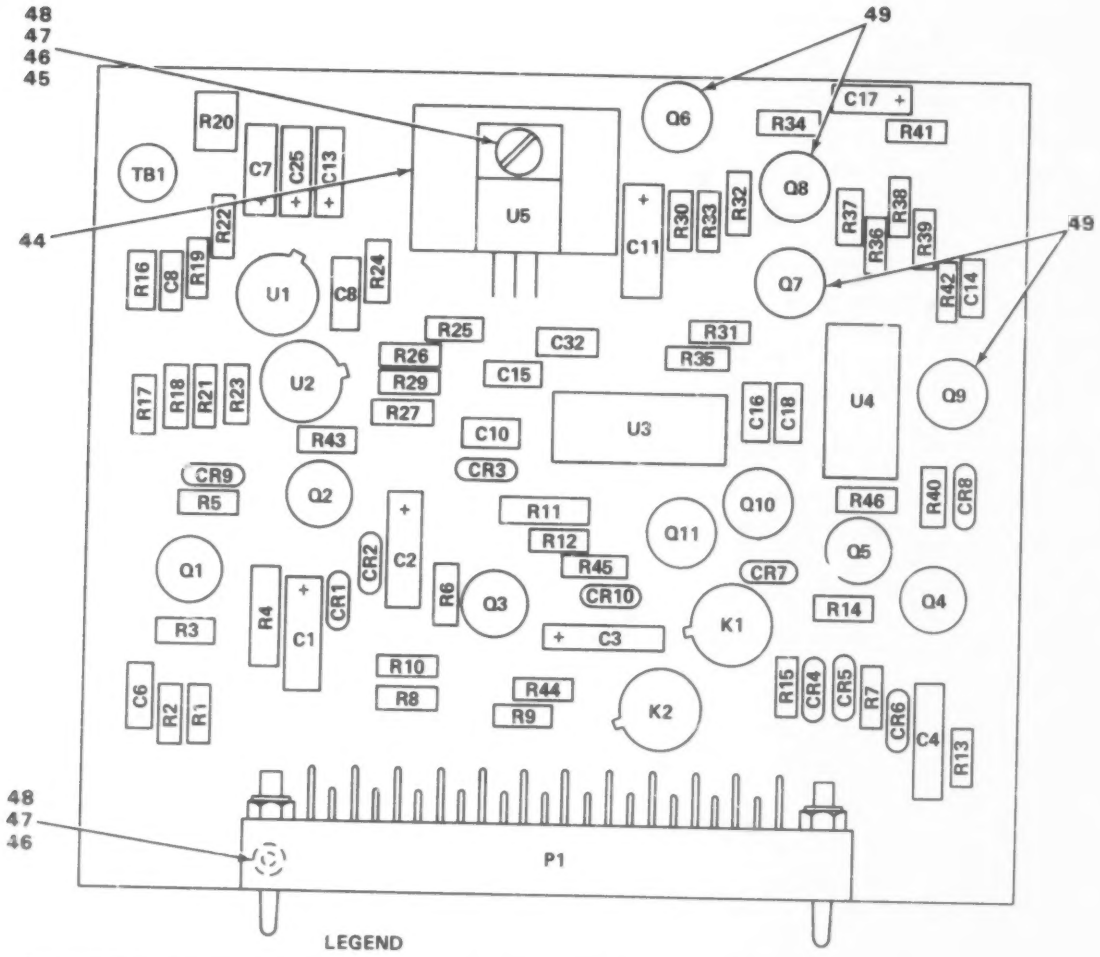

LEGEND

REF DES	FIND NO.	REF DES	FIND NO.	REF DES	FIND NO.	REF DES	FIND NO.	REF DES	FIND NO.
CR1	1	C11	8	Q10	14	R19	26	R41	37
CR2	1	C12	9	Q11	14	R20	27	R42	22
CR3	2	C13	5	R1	16	R21	28	R43	17
CR4	1	C14	4	R2	16	R22	20	R44	23
CR5	1	C15	9	R3	17	R23	29	R45	21
CR6	2	C16	10	R4	18	R24	30	R46	20
CR7	1	C17	11	R5	19	R25	31	TB1	38
CR8	1	C18	10	R6	20	R26	16	U1	39
CR9	2	K1	12	R7	21	R27	32	U2	40
CR10	1	K2	12	R8	16	R29	19	U3	41
C1	3	P1	13	R9	16	R30	33	U4	42
C2	3	Q1	14	R10	17	R31	22	U5	43
C3	3	Q2	14	R11	18	R32	20		
C4	3	Q3	14	R12	19	R33	34		
C5	4	Q4	14	R13	20	R35	35		
C6	4	Q5	14	R14	22	R36	22		
C7	5	Q6	15	R15	23	R37	32		
C8	6	Q7	14	R16	24	R38	36		
C9	5	Q8	14	R17	25	R39	37		
C10	7	Q9	14	R18	25	R40	32		

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A5

EL0JE041

FIGURE 31. OUT OF LOCK DETECTOR.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0631 OUT-OF-LOCK DETECTOR		
31	1	PADZZ	5961-00-985-4900	81349	JAN1N647	SEMICONDUCTOR,DIODE	EA	7
31	2	PADZZ	5961-00-232-3279	81349	JAN1N5711	SEMICONDUCTOR,DIODE	EA	3
31	3	XBDZZ		34303	35V47P0RM10PCT	CAPACITOR,FIXED,ELE	EA	4
31	4	PADZZ	5910-00-103-7748	81349	CK06BX105K	CAPACITOR,FIXED,CER	EA	3
31	5	XBDZZ		34303	35V22P0RM20PCT	CAPACITOR,FIXED,ELE	EA	3
31	6	PADZZ	5910-01-054-6159	81349	CMR04C3R0D0DR	CAPACITOR,FIXED,MIC	EA	1
31	7	PADZZ	5910-00-893-6748	81349	CK05BX101K	CAPACITOR,FIXED,CER	EA	1
31	8	XBDZZ		34303	SWT4C10V100J	CAPACITOR,FIXED,ELE	EA	1
31	9	PADZZ	5910-00-113-7672	81349	CK05BX104K	CAPACITOR,FIXED,CER	EA	2
31	10	PADZZ	5910-00-111-4811	81349	CK05BX103K	CAPACITOR,FIXED,CER	EA	2
31	11	XBDZZ		34303	SWT3C35V10J	CAPACITOR,FIXED,ELE	EA	1
31	12	XBDZZ		81349	JM39016/9-005L	RELAY	EA	2
31	13	PADZZ	5935-01-006-7791	97954	MIGS23MB	CONNECTOR,PLUG,ELEC	EA	1
31	14	PADZZ	5961-00-951-8757	81349	JAN2N2222A	TRANSISTOR	EA	10
31	15	PADZZ	5961-00-137-0813	81349	JAN2N5431	TRANSISTOR	EA	1
31	16	PADZZ	5905-00-111-1679	81349	RCR07G512JS	RESISTOR,FIXED,COMP	EA	5
31	17	PADZZ	5905-00-110-7620	81349	RCR07G102JS	RESISTOR,FIXED,COMP	EA	3
31	18	PADZZ	5905-00-104-8349	81349	RCR20G511JS	RESISTOR,FIXED,COMP	EA	2
31	19	PADZZ	5905-00-141-1183	81349	RCR07G101JS	RESISTOR,FIXED,COMP	EA	3
31	20	PADZZ	5905-00-105-7764	81349	RCR07G222JS	RESISTOR,FIXED,COMP	EA	5
31	21	PADZZ	5905-00-141-0717	81349	RCR07G473JS	RESISTOR,FIXED,COMP	EA	2
31	22	PADZZ	5905-00-114-0711	81349	RCR07G472JS	RESISTOR,FIXED,COMP	EA	4
31	23	PADZZ	5905-00-111-4750	81349	RCR07G301JS	RESISTOR,FIXED,COMP	EA	2
31	24	PADZZ	5905-00-104-8369	81349	RCR07G362JS	RESISTOR,FIXED,COMP	EA	1
31	25	PADZZ	5905-00-435-1718	81349	RCR07G241JS	RESISTOR,FIXED,COMP	EA	2
31	26	PADZZ	5905-00-119-8768	81349	RCR07G821JS	RESISTOR,FIXED,COMP	EA	1
31	27	PADZZ	5905-00-452-0710	81349	RJ26FX501	RESISTOR,ADJUSTABLE	EA	1
31	28	PADZZ	5905-00-419-5258	81349	RNR55C2211FS	RESISTOR,FIXED,FILM	EA	1

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
31	29	PADZZ	5905-00-240-2012	81349	RNR55C1003FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-264-4066	81349	RNR55C1103FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-476-7962	81349	RNR55C1213FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-456-3852	81349	RNR55C1333FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-456-3874	81349	RNR55C1403FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-430-3626	81349	RNR55C1543FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-456-3875	81349	RNR55C1623FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	29	PADZZ	5905-00-456-3887	81349	RNR55C1693FS	RESISTOR,FIXED,FILM SELECT AT TEST	EA	1
31	30	PADZZ	5905-00-116-8556	81349	RCR07G223JS	RESISTOR,FIXED,FILM	EA	1
31	31	PADZZ	5905-00-104-8362	81349	RCR07G132JS	RESISTOR,FIXED,COMP	EA	3
31	32	PADZZ	5905-00-136-8406	81349	RCR07G242JS	RESISTOR,FIXED,COMP	EA	1
31	33	PADZZ	5905-00-104-8360	81349	RCR07G623JS	RESISTOR,FIXED,COMP	EA	1
31	34	PADZZ	5905-00-106-3668	81349	RCR07G220JS	RESISTOR,FIXED,COMP	EA	1
31	35	PADZZ	5905-00-120-9154	81349	RCR07G471JS	RESISTOR,FIXED,COMP	EA	1
31	36	PADZZ	5905-00-121-9919	81349	RCR07G106JS	RESISTOR,FIXED,COMP	EA	1
31	37	PADZZ	5905-00-485-4545	81349	RCR07G334JS	RESISTOR,FIXED,COMP	EA	2
31	38	XBDZZ		80063	SM-D-952557-1	PRINTED WIRING BRD	EA	1
31	39	XBDZZ		81349	JANM38510/10103BGB	MICROCIRCUIT	EA	1
31	40	PADZZ	5962-01-077-6116	27014	LM193AH/883B	MICROCIRCUIT	EA	1
31	41	XBDZZ		81349	JANM38510/01309BEB	MICROCIRCUIT	EA	1
31	42	PADZZ	5962-01-068-9585	18324	SE556-1F/883B	MICROCIRCUIT	EA	1
31	43	XBDZZ		18324	SA78MHV05CU	MICROCIRCUIT	EA	1
31	44	XBDZZ		80063	SM-B-952492	HEATSINK	EA	1
31	45	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	3
31	46	PADZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	3
31	47	PADZZ	5310-00-934-9748	96906	MS35649-244	NUT,PLAIN,HEXAGON	EA	3
31	48	PADZZ	5305-00-054-5649	96906	MS51957-15	SCREW,MACHINE	EA	1
31	49	PADZZ	5999-00-956-4973	25500	CP25-6-5	PAD,TRANSISTOR	EA	11

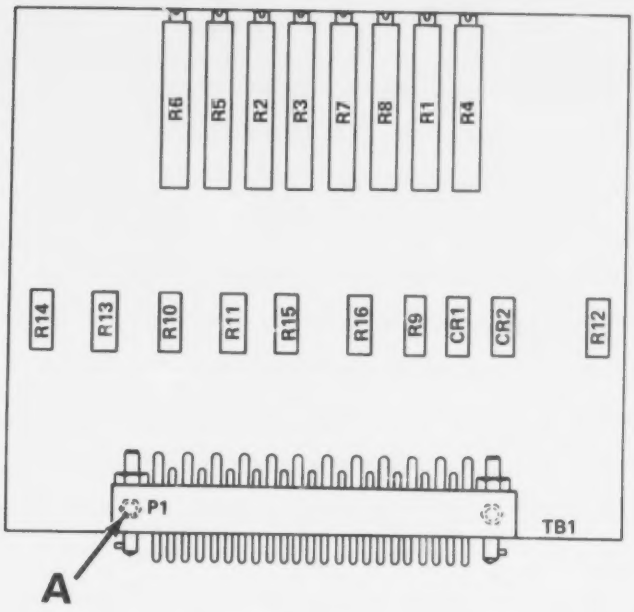

REF DES	FIND NO.
CR1	1
CR2	1
P1	2
R1	3
R2	3
R3	3
R4	3
R5	3
R6	3
R7	3
R8	3
R9	4
R10	5
R11	6
R12	7
R13	8
R14	9
R15	4
R16	9
TB1	10

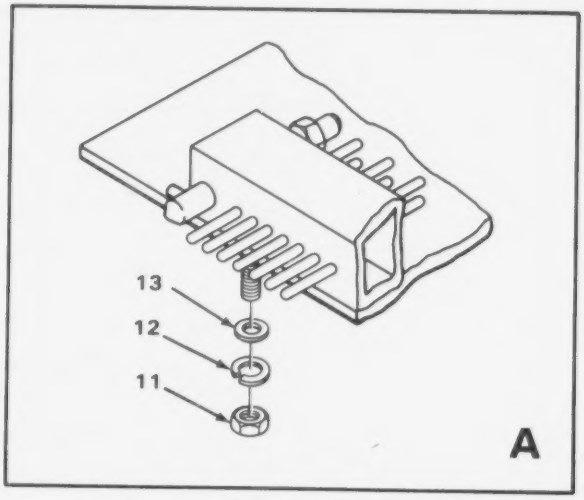

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A6

EL0JE043

FIGURE 32. STATUS INDICATOR CALIBRATOR,

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0632 STATUS INDICATOR CALIBRATOR		
32	1	PADZZ	5961-00-985-4900	81349	JAN1N647	SEMICONDUCTOR,DIODE	EA	2
32	2	PADZZ	5935-01-006-7791	97954	MIGS23MB	CONNECTOR,PLUG,ELEC	EA	1
32	3	PADZZ	5905-00-483-4284	81349	RJ12CY103	RESISTOR,VARIABLE	EA	8
32	4	PADZZ	5905-00-105-7767	81349	RCR07G474JS	RESISTOR,FIXED,COMP	EA	2
32	5	PADZZ	5905-00-110-7620	81349	RCR07G102JS	RESISTOR,FIXED,COMP	EA	1
32	6	PADZZ	5905-00-141-1183	81349	RCR07G101JS	RESISTOR,FIXED,COMP	EA	1
32	7	PADZZ	5905-00-435-6414	81349	RCR07G114JS	RESISTOR,FIXED,COMP	EA	1
32	8	PADZZ	5905-00-116-2394	81349	RCR07G511JS	RESISTOR,FIXED,COMP	EA	1
32	9	PADZZ	5905-00-106-3666	81349	RCR07G103JS	RESISTOR,FIXED,COMP	EA	2
32	10	XBDZZ		80063	SM-D-753437	PRINTED WIRING BRD	EA	1
32	11	PADZZ	5310-00-934-9748	96906	MS35649-244	NUT,PLAIN,HEXAGON	EA	2
32	12	PADZZ	5310-00-933-8118	96906	MS35338-135	WASHER,LOCK	EA	2
32	13	PADZZ	5310-00-595-6211	96906	MS15795-803	WASHER,FLAT	EA	2

READEX FICHE

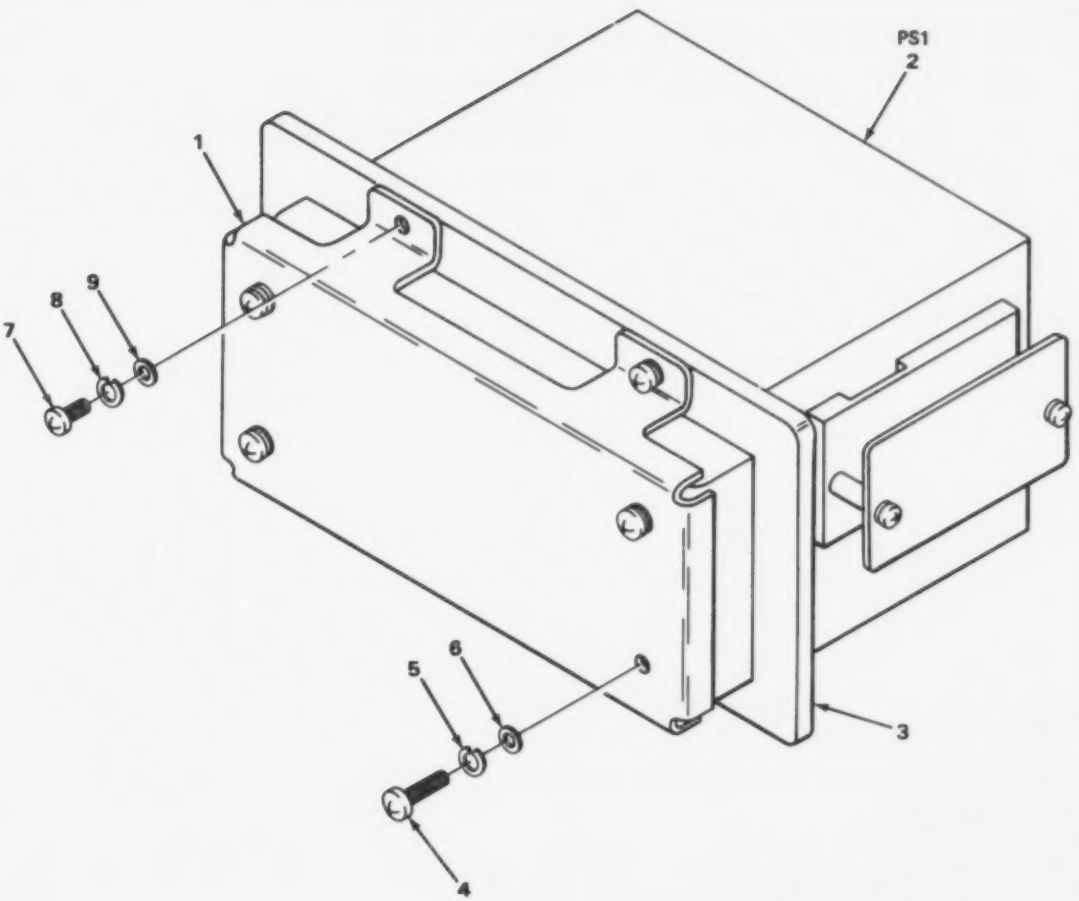

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2A1

EL0JE044

FIGURE 33. POWER SUPPLY ASSEMBLY.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0633 POWER SUPPLY ASSEMBLY		
33	1	XBFZZ		80063	SM-C-753678	SHIELD,HEATSINK	EA	1
33	2	PAFDA	6130-00-124-4986	31196	1130000097	POWER SUPPLY	EA	1
33	3	XBFZZ		80063	SM-D-753644	HEATSINK	EA	1
33	4	PAFZZ	5305-00-054-6673	96906	MS51957-48	SCREW,MACHINE	EA	4
33	5	PAFZZ	5310-00-933-8119	96906	MS35338-137	WASHER,LOCK	EA	4
33	6	PAFZZ	5310-00-880-5978	96906	MS15795-807	WASHER,FLAT	EA	4
33	7	PAFZZ	5305-00-054-6652	96906	MS51957-28	SCREW,MACHINE	EA	4
33	8	PAFZZ	5310-00-929-6395	96906	MS35338-136	WASHER,LOCK	EA	4
33	9	PAFZZ	5310-00-722-5998	96906	MS15795-805	WASHER,FLAT	EA	4

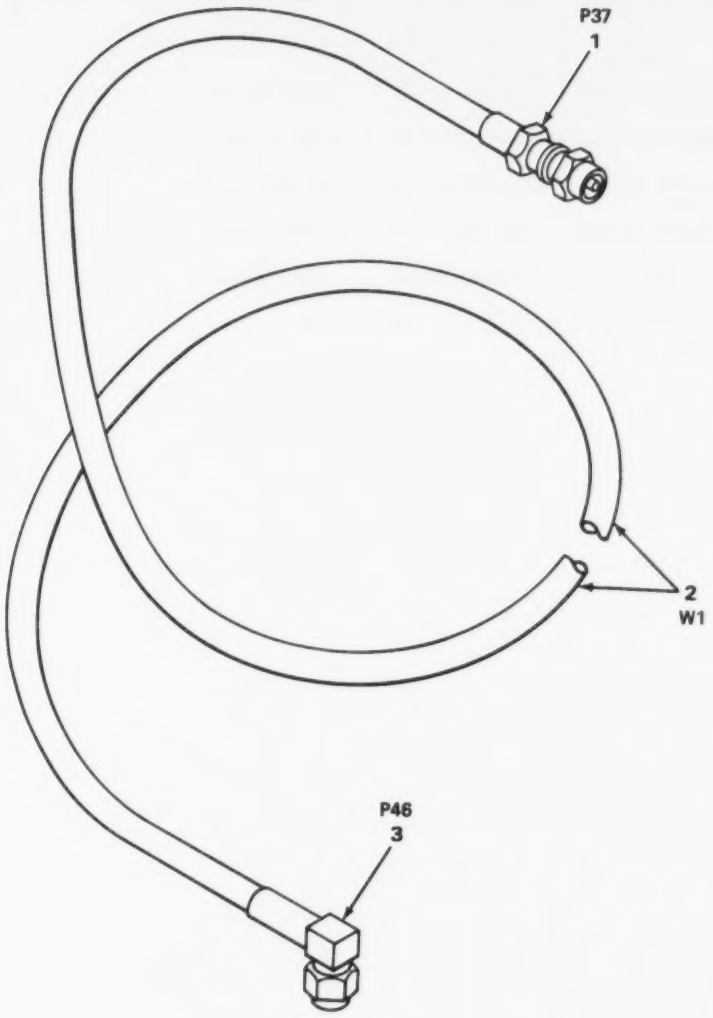

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W48

EL0JE045

FIGURE 34. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0634 CABLE ASSEMBLY, RF		
34	1	XBFZZ		95077	2943-6001P	CONNECTOR,RECEP ELE.....	EA	1
34	2	XBFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
34	3	PAFZZ	5935-00-470-8995	95077	2913-6001	CONNECTOR,PLUG ELE.....	EA	1

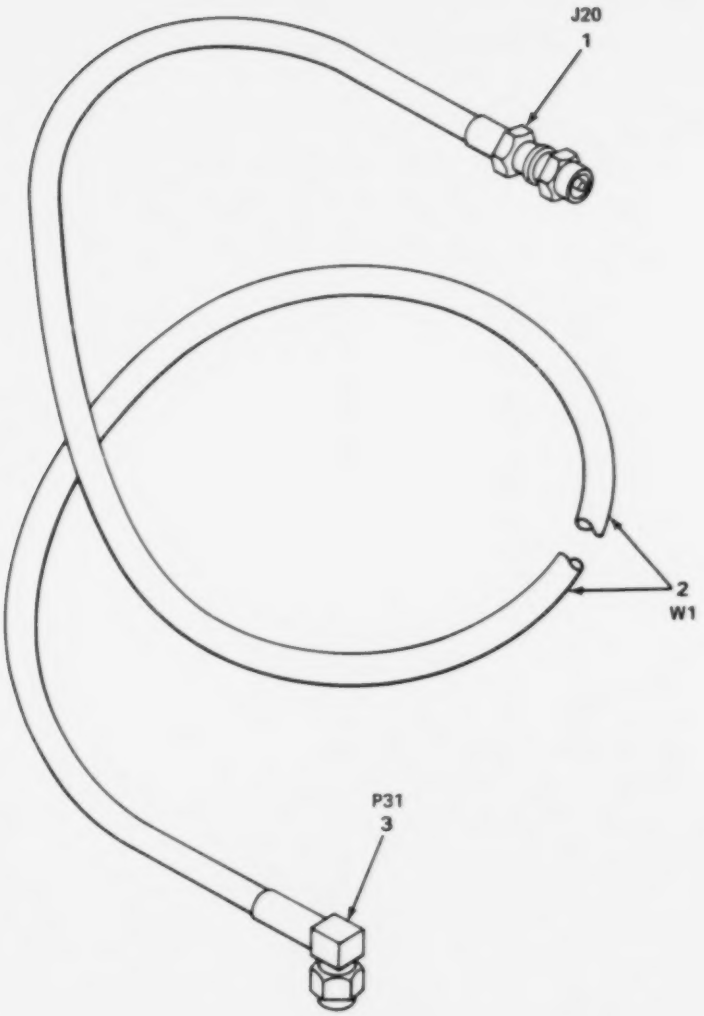

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2AW22

EL0JE046

FIGURE 35. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0635 CABLE ASSEMBLY, RF		
35	1	XBFZZ		95077	2943-6001P	CONNECTOR,RECEP ELE.....	EA	1
35	2	XBFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
35	3	PAFZZ	5935-00-470-8995	95077	2913-6001	CONNECTOR,PLUG ELEC.....	EA	1

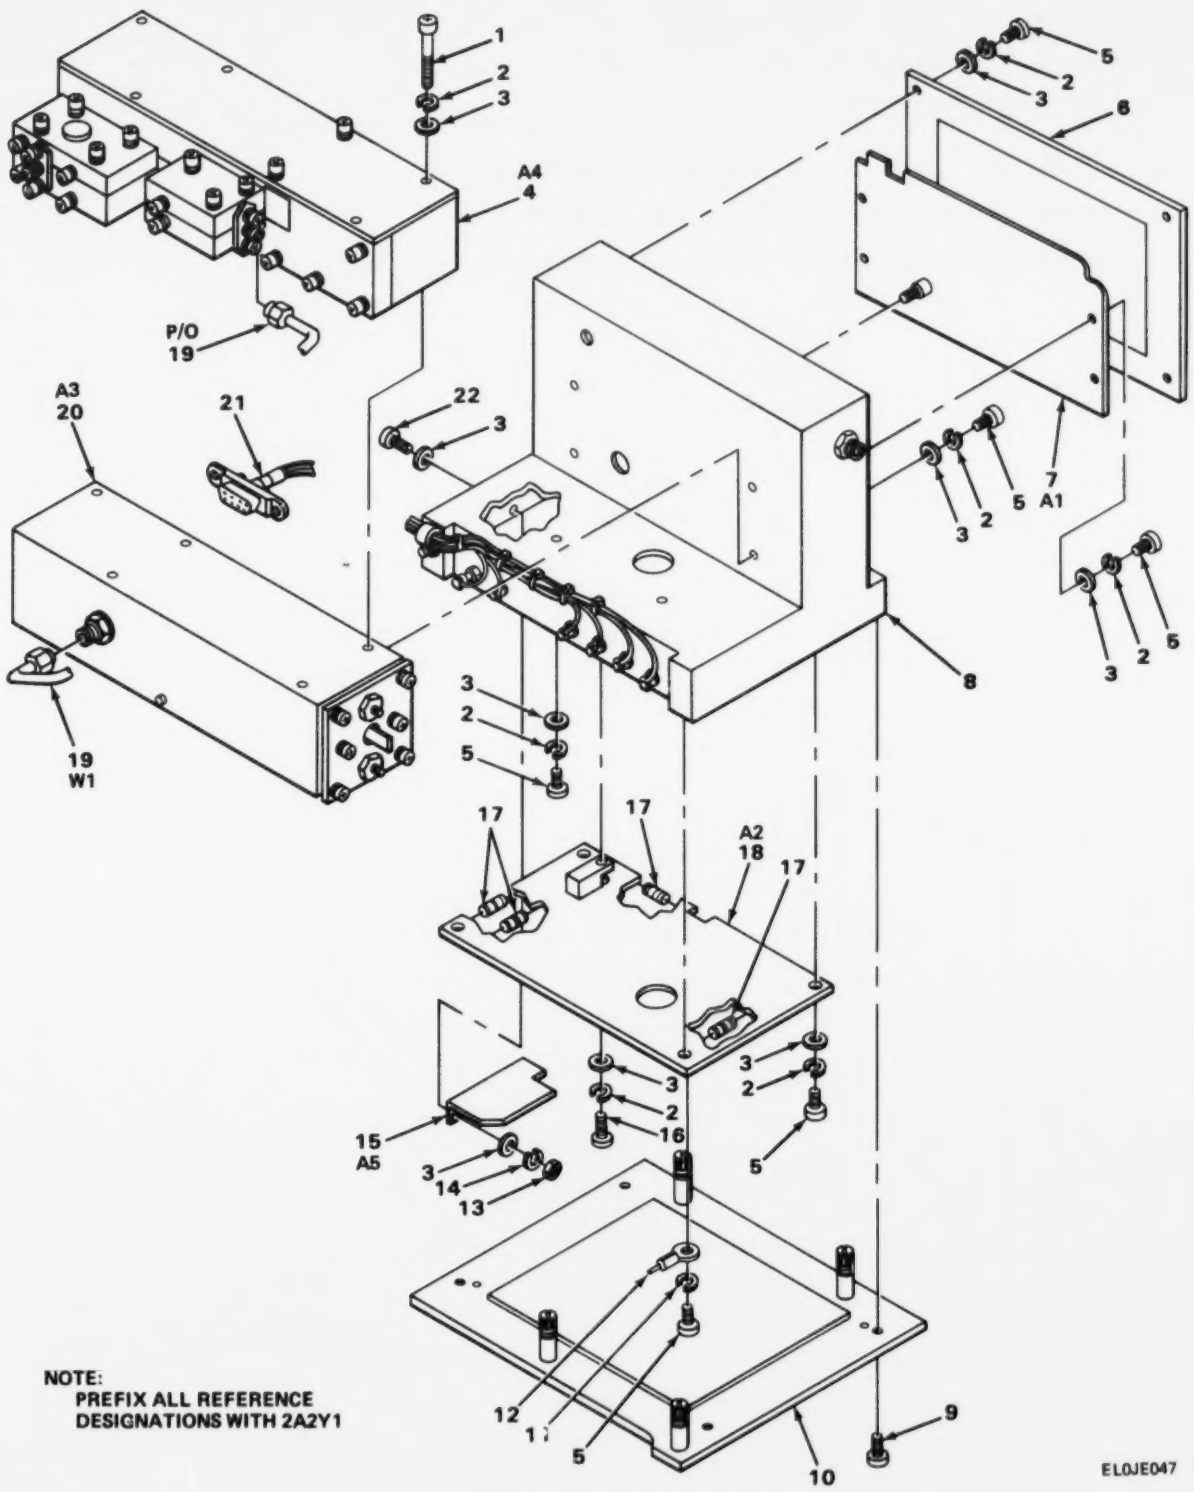

FIGURE 36. RF PHASE-LOCKED OSCILLATOR.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0636 RF PHASE-LOCKED OSCILLATOR		
36	1	XBDZZ		70318	2-56UNC2AX13-16	SCREW,MACHINE	EA	7
36	2	PADZZ	5310-00-928-2690	96906	MS35338-134	WASHER,LOCK	EA	24
36	3	PADZZ	5310-00-043-4708	80205	NAS620C2	WASHER,FLAT	EA	28
36	4	PADDA	5895-01-008-8164	80063	SM-D-754304-2	FREQUENCY,MULTIPLIE	EA	1
36	5	PADZZ	5305-00-054-5637	96906	MS51957-3	SCREW,MACHINE	EA	19
36	6	XBDZZ		80063	SM-D-754269	COVER,RF CAVITY	EA	1
36	7	PADDA	5895-01-007-9485	80063	SM-D-754391-1	CIRCUIT CARD ASSY	EA	1
36	8	XBDZZ		80063	SM-D-754272	HOUSING,ELEC,OSC	EA	1
36	9	PADZZ	5305-00-054-5636	96906	MS51957-2	SCREW,MACHINE	EA	4
36	10	XBDZZ		80063	SM-D-754268	PLATE,BASE	EA	1
36	11	PADZZ	5310-00-543-4652	96906	MS35333-69	WASHER,LOCK	EA	1
36	12	PADZZ	5940-00-581-7899	79963	263	TERMINAL,LUG	EA	1
36	13	XBDZZ		70318	1-64UNC2B	NUT,PLAIN,HEXAGON	EA	3
36	14	XBDZZ		70318	NO1	WASHER,LOCK	EA	2
36	15	PADDA	5895-01-024-7862	80063	SM-B-754440	CIRCUIT CARD ASSY	EA	1
36	16	PADZZ	5305-00-054-5635	96906	MS51957-1	SCREW,MACHINE	EA	1
36	17	PADZZ	5950-01-114-3143	37695	657867-2	BEAD,FERRITE	EA	9
36	18	PADDA	5895-01-007-9484	80063	SM-D-754301	CIRCUIT CARD ASSY	EA	1
36	19	XBDZZ		80063	SM-C-754361	CABLE ASSEMBLY,RF	EA	1
36	20	PADDA	5895-01-007-9409	80063	SM-D-754298-1	OSCILLATOR,RF	EA	1
36	21	XBDZZ		80063	SM-D-754486	WIRING HARNESS,OSC	EA	1
36	22	XBDZZ		70318	1-64UNC2AX1-4	SCREW,MACHINE	EA	2

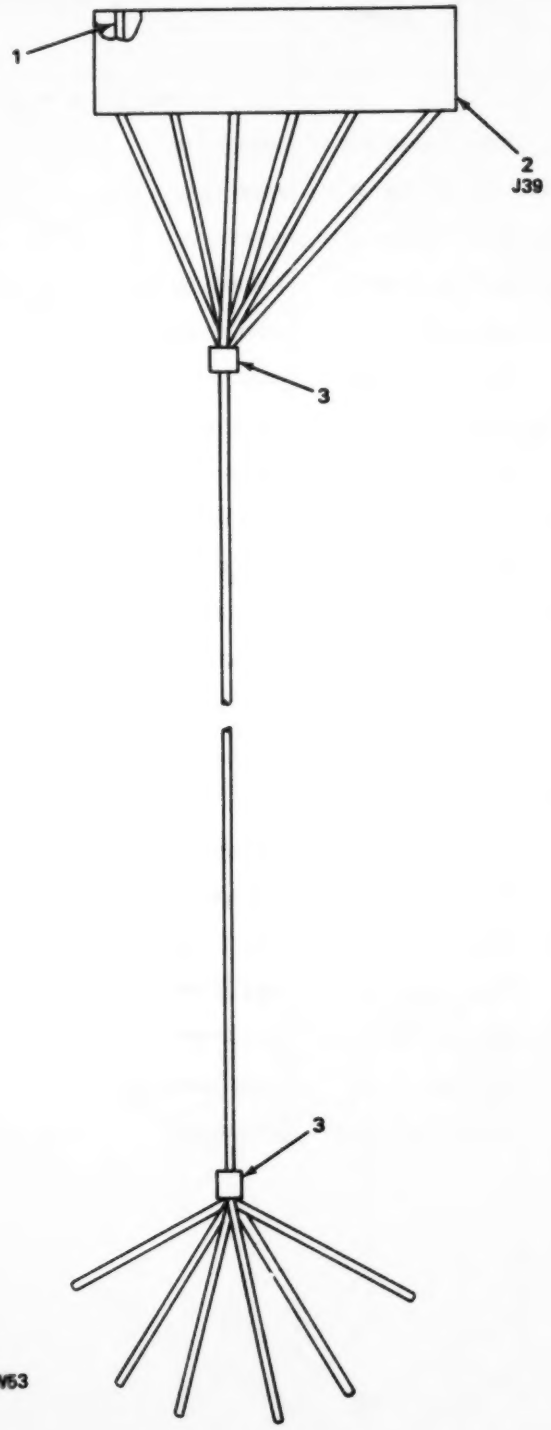

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2AZW53

ELOJE048

FIGURE 37. WIRING HARNESS, OSCILLATOR.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0637 WIRING HARNESS, OSCILLATOR		
37	1	PAFZZ	5999-00-062-1608	02660	220-P02	CONTACT,ELECTRICAL.....	EA	6
37	2	PAFZZ	5935-00-114-8767	02660	223-1209	CONNECTOR,RECEPTACL.....	EA	1
37	3	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN.....	EA	14

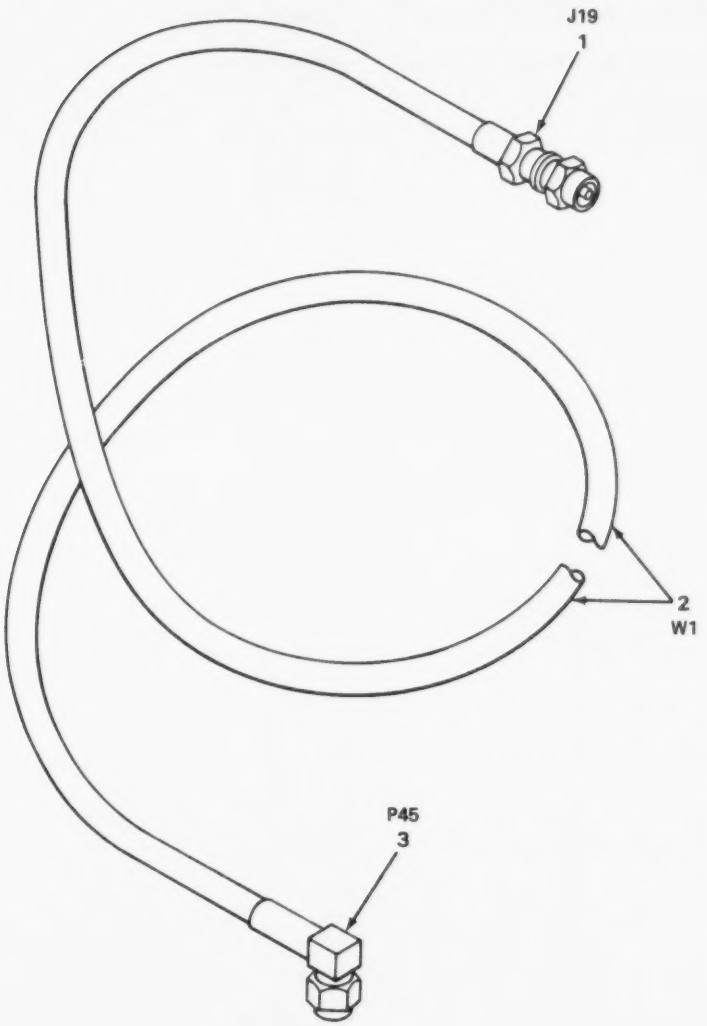

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W32

EL0JE049

FIGURE 38. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0638 CABLE ASSEMBLY, RF		
38	1	XBFZZ		95077	2943-6001P	CONNECTOR,RECEP ELE.....	EA	1
38	2	XBFZZ	6145-00-918-9494	81349	M17/113-RG316	CABLE,RADIO FREQ.....	FT	V
38	3	PAFZZ	5935-00-470-8995	95077	2913-6001	CONNECTOR,PLUG,ELEC.....	EA	1

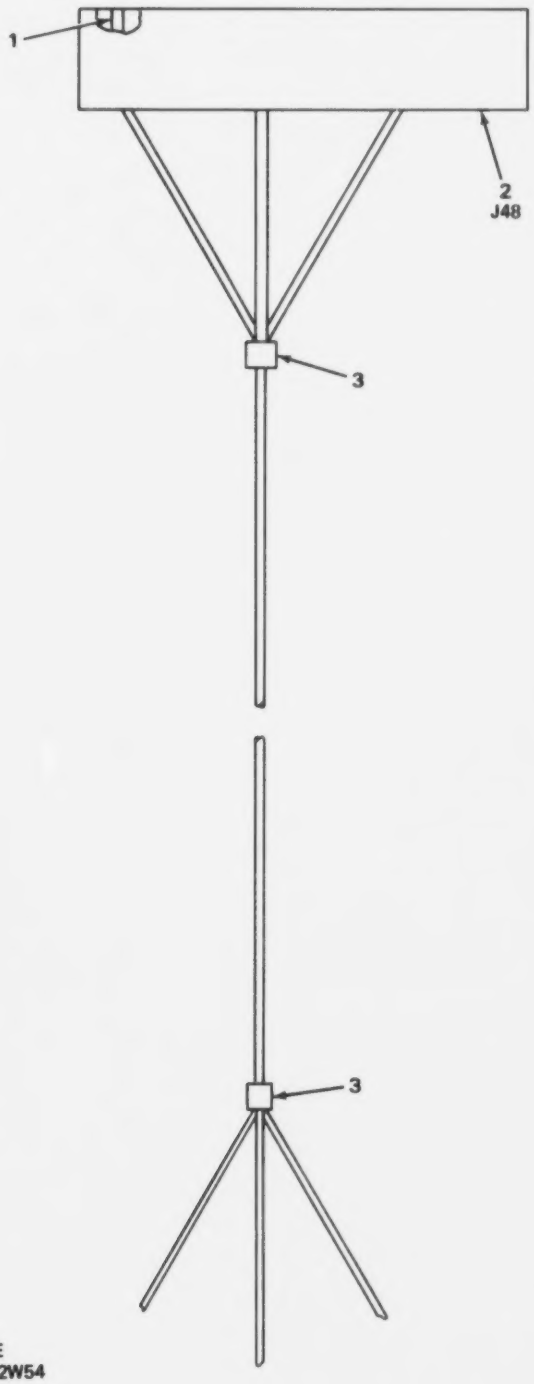

NOTE:
PREFIX ALL REFERENCE DESIGNATIONS WITH 2A2W54

EL0JE050

FIGURE 39. WIRING HARNESS, OSCILLATOR.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0639 WIRING HARNESS, OSCILLATOR		
39	1	PAFZZ	5999-00-062-1608	02660	220-P02	CONTACT,ELECTRICAL.....	EA	3
39	2	PAFZZ	5935-01-019-6557	02660	133-012-09	CONNECTOR,RECEP ELE.....	EA	1
39	3	PAFZZ	5975-00-727-5153	96906	MS3367-4-9	STRAP,TIEDOWN.....	EA	2

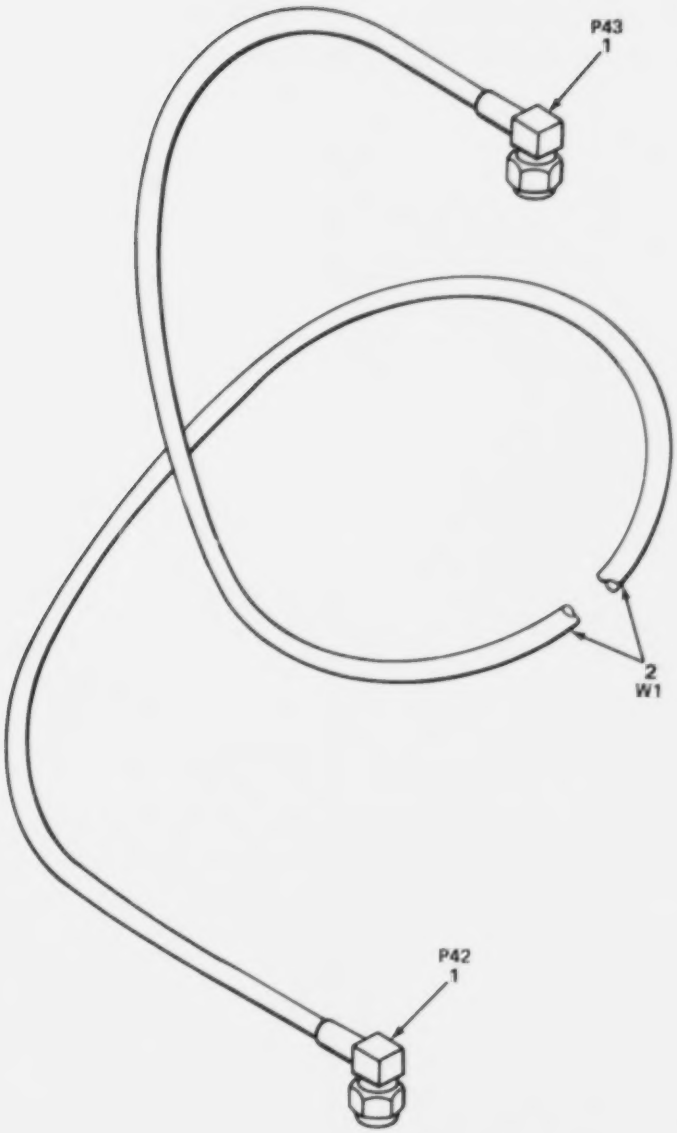

NOTE:
PREFIX ALL REFERENCE
DESIGNATIONS WITH 2A2W30

ELOJE051

FIGURE 40. CABLE ASSEMBLY, RF.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0640 CABLE ASSEMBLY, RF		
40	1	XBFZZ		95077	2910-6001	CONNECTOR,PLUG.....	EA	2
40	2	PAFZZ	6145-00-823-2544	81349	M17/060-RG142	CABLE,RADIO FREQUEN.....	FT	V

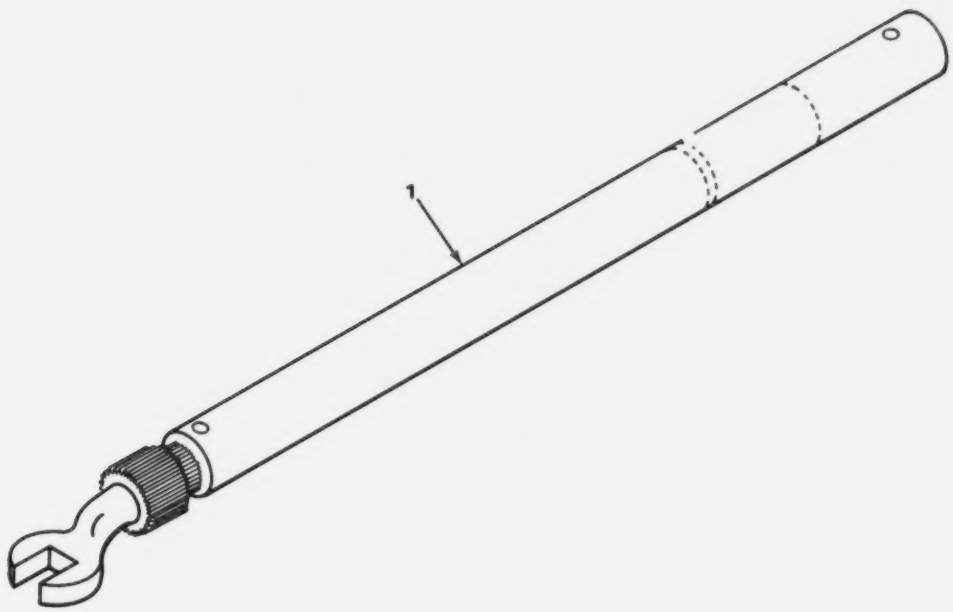

ELOJE052

FIGURE 41. SPECIAL TOOLS.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 30 SPECIAL TOOLS		
41	1	PEFZZ	5120-00-113-0042	26805	2098-5065	WRENCH,TORQUE B01: 1 AUTH FOR EACH EQUIP.....	EA	1

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
5365-00-008-2065	26	45
5895-00-014-7776	1	65
5895-00-014-7845	2	12
5305-00-043-0267	2	17
5310-00-043-4708	36	3
5310-00-050-3275	27	11
5970-00-052-3297	14	4
5305-00-054-5635	36	16
5305-00-054-5636	36	9
5305-00-054-5637	24	3
5305-00-054-5637	36	5
5305-00-054-5638	2	8
5305-00-054-5638	3	8
5305-00-054-5638	27	8
5305-00-054-5641	26	34
5305-00-054-5642	2	5
5305-00-054-5647	1	60
5305-00-054-5647	24	7
5305-00-054-5648	1	23
5305-00-054-5648	2	42
5305-00-054-5648	22	4
5305-00-054-5648	25	4
5305-00-054-5648	27	1
5305-00-054-5649	30	10
5305-00-054-5649	31	48
5305-00-054-5650	1	19
5305-00-054-5650	2	76
5305-00-054-5651	1	46
5305-00-054-5652	30	13
5305-00-054-5654	3	5
5305-00-054-6650	11	3
5305-00-054-6651	3	9
5305-00-054-6652	1	4
5305-00-054-6652	2	39
5305-00-054-6652	3	29
5305-00-054-6652	33	7
5305-00-054-6653	1	64
5305-00-054-6654	3	12
5305-00-054-6654	25	13
5305-00-054-6654	26	20
5305-00-054-6658	3	14
5305-00-054-6658	26	48
5305-00-054-6659	30	1
5305-00-054-6660	2	65
5305-00-054-6667	1	26
5305-00-054-6668	25	1
5305-00-054-6670	1	44
5305-00-054-6670	2	70
5305-00-054-6670	3	28
5305-00-054-6671	2	54
5305-00-054-6671	3	17
5305-00-054-6673	3	23
5305-00-054-6673	33	4
5305-00-056-9961	24	1
5999-00-062-1608	37	1
5999-00-062-1608	39	1
5305-00-066-7328	1	7
5305-00-066-7328	2	51
5905-00-067-3244	28	1
5305-00-068-5287	2	79
5310-00-069-5291	2	55
5310-00-069-5291	3	16
5305-00-071-1322	26	11
5305-00-071-2241	27	15
5305-00-079-5835	1	14
5305-00-079-5835	3	24
5905-00-087-8408	28	8
5305-00-088-9666	1	2
5305-00-088-9666	2	3
5305-00-088-9670	2	71
6350-00-102-4210	26	10
5910-00-103-7748	31	4
5905-00-104-8349	31	18
5905-00-104-8360	31	33
5905-00-104-8362	31	31
5905-00-104-8368	23	14
5905-00-104-8369	31	24
5905-00-105-7764	31	20
5905-00-105-7767	32	4
5905-00-106-1249	29	7
5905-00-106-1274	23	10
5905-00-106-3666	23	19
5905-00-106-3666	32	9
5905-00-106-3668	31	34
5905-00-107-0656	23	12
5905-00-110-0196	23	13
5905-00-110-0196	26	49
5905-00-110-0388	29	4
5905-00-110-7620	31	17
5905-00-110-7620	32	5
5905-00-111-1679	31	16
5905-00-111-4750	31	23
5910-00-111-4811	29	5
5910-00-111-4811	31	10
5905-00-111-4845	23	9
5120-00-113-0042	41	1
5910-00-113-7672	31	9
5905-00-114-0711	31	22
5935-00-114-8767	37	2
5905-00-115-2223	23	7
5905-00-116-2394	32	8
5905-00-116-8556	31	30
5905-00-119-3503	23	11
5905-00-119-8768	31	26
5905-00-120-9154	31	35
5905-00-121-9863	24	27
5905-00-121-9863	28	2
5905-00-121-9919	31	36
5985-00-124-4795	2	32
6130-00-124-4986	33	2
5895-00-124-5105	1	56
5985-00-124-5119	1	50
5985-00-124-5247	2	2
5895-00-124-5257	2	52
5999-00-124-5264	2	64
6625-00-124-5269	2	59
5895-00-124-8754	26	31
5985-00-124-8763	25	34
5905-00-133-0440	23	15

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-136-8406	31	32
5961-00-137-0813	31	15
5905-00-138-4918	24	12
5905-00-141-0717	31	21
5905-00-141-0742	23	17
5905-00-141-1149	23	16
5905-00-141-1183	31	19
5905-00-141-1183	32	6
5940-00-143-4780	16	4
5905-00-147-0386	23	20
5961-00-153-3578	23	6
6240-00-155-7836	26	7
5935-00-191-5434	24	31
5940-00-204-8966	14	2
5310-00-209-1366	3	13
5305-00-225-6400	22	8
5961-00-227-9783	23	5
5961-00-232-3279	29	6
5961-00-232-3279	31	2
5905-00-240-2012	31	29
5905-00-264-4066	31	29
5365-00-298-6564	26	23
5310-00-298-8157	1	35
5935-00-337-6770	1	34
5985-00-341-5211	2	90
5940-00-350-4654	24	13
5940-00-350-4654	24	18
5940-00-350-4654	24	23
5940-00-350-4654	24	28
5905-00-402-7049	23	18
5310-00-413-6059	1	55
5905-00-419-5258	31	28
5905-00-430-3626	31	29
5365-00-432-3584	26	43
5905-00-432-9157	24	26
5905-00-435-1718	31	25
5905-00-435-6414	32	7
5905-00-442-9356	23	8
5905-00-452-0710	31	27
5905-00-456-3852	31	29
5905-00-456-3874	31	29
5905-00-456-3875	31	29
5905-00-456-3887	31	29
5935-00-470-8995	34	3
5935-00-470-8995	35	3
5935-00-470-8995	38	3
5905-00-476-7962	31	29
5975-00-482-3954	20	6
5905-00-483-4284	32	3
5905-00-485-4545	31	37
5930-00-501-1749	26	16
5360-00-517-6225	26	40
5305-00-531-0137	25	10
5310-00-543-4652	36	11
5940-00-581-7899	36	12
5310-00-582-5965	27	12
5310-00-595-6211	1	17
5310-00-595-6211	2	44
5310-00-595-6211	22	2
5310-00-595-6211	24	6
5310-00-595-6211	25	5
5310-00-595-6211	27	3
5310-00-595-6211	30	8
5310-00-595-6211	31	45
5310-00-595-6211	32	13
5310-00-595-6761	2	6
5310-00-595-6761	3	7
5310-00-595-6761	26	32
5310-00-595-6772	11	8
5310-00-616-8660	2	23
5930-00-626-2917	26	9
5905-00-630-6263	26	22
5940-00-636-5593	16	3
5950-00-645-3771	1	25
5355-00-68[illegible]-1357	26	5
5310-00-716-5612	23	23
5305-00-719-5064	25	52
5310-00-720-8549	11	10
5310-00-722-5998	1	6
5310-00-722-5998	2	40
5310-00-722-5998	3	11
5310-00-722-5998	11	2
5310-00-722-5998	25	7
5310-00-722-5998	26	19
5310-00-722-5998	30	3
5310-00-722-5998	33	9
5975-00-727-5153	1	52
5975-00-727-5153	14	1
5975-00-727-5153	16	6
5975-00-727-5153	17	4
5975-00-727-5153	20	2
5975-00-727-5153	37	3
5975-00-727-5153	39	3
5905-00-758-4802	24	21
5905-00-763-8282	28	9
5905-00-763-9311	28	10
5905-00-764-4108	28	6
5305-00-766-2422	29	11
5310-00-773-7618	26	24
5310-00-773-7624	2	24
5340-00-793-0543	1	67
5305-00-800-7261	26	41
5310-00-804-0141	25	3
5940-00-804-0365	20	1
5310-00-809-4058	27	13
5340-00-820-1789	2	83
6145-00-823-2544	40	2
5310-00-827-9139	23	22
5305-00-833-8624	24	8
5305-00-833-8631	23	24
5305-00-837-9739	2	82
5340-00-840-0114	26	12
6210-00-840-0850	26	8
5935-00-845-2537	16	5
5910-00-852-7099	2	61
5910-00-852-7099	22	12
5310-00-880-5978	1	13
5310-00-880-5978	2	68
5310-00-880-5978	3	22
5310-00-880-5978	26	37
5310-00-880-5978	33	6

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
5910-00-893-6748	31	7
5910-00-903-3714	23	3
5935-00-904-4050	2	87
5935-00-913-4462	17	1
5940-00-913-9383	22	11
6145-00-918-9494	4	1
6145-00-918-9494	5	2
6145-00-918-9494	6	2
6145-00-918-9494	7	2
6145-00-918-9494	8	2
6145-00-918-9494	9	2
6145-00-918-9494	10	2
6145-00-918-9494	12	2
6145-00-918-9494	13	2
6145-00-918-9494	15	2
6145-00-918-9494	18	2
6145-00-918-9494	19	3
6145-00-918-9494	20	4
6145-00-918-9494	21	2
6145-00-918-9494	34	2
6145-00-918-9494	35	2
6145-00-918-9494	38	2
5305-00-922-8778	1	66
5310-00-928-2690	26	33
5310-00-928-2690	27	7
5310-00-928-2690	36	2
5310-00-929-6395	1	5
5310-00-929-6395	2	22
5310-00-929-6395	3	10
5310-00-929-6395	11	1
5310-00-929-6395	25	14
5310-00-929-6395	26	18
5310-00-929-6395	30	2
5310-00-929-6395	33	8
5310-00-933-8118	1	18
5310-00-933-8118	2	43
5310-00-933-8118	22	3
5310-00-933-8118	25	6
5310-00-933-8118	27	2
5310-00-933-8118	30	9
5310-00-933-8118	31	46
5310-00-933-8118	32	12
5310-00-933-8119	1	12
5310-00-933-8119	2	53
5310-00-933-8119	3	18
5310-00-933-8119	25	2
5310-00-933-8119	33	5
5310-00-933-8120	11	9
5310-00-934-9748	1	63
5310-00-934-9748	31	47
5310-00-934-9748	32	11
5310-00-934-9761	1	51
5310-00-934-9761	2	66
5310-00-934-9761	25	18
5310-00-938-2013	25	9
5310-00-938-2013	27	6
5905-00-940-7163	24	11
5910-00-944-3561	23	1
5961-00-951-8757	31	14
5905-00-952-6824	28	3
5999-00-956-4973	31	49
5305-00-958-2918	2	27
5940-00-959-4487	26	51
5310-00-982-5030	1	42
5940-00-983-7091	20	7
5905-00-984-1463	28	5
5905-00-984-7685	28	7
5961-00-985-4900	31	1
5961-00-985-4900	32	1
5355-00-985-6888	26	3
5340-00-988-3210	25	37
5305-00-988-7602	2	89
5305-00-988-7602	3	21
5305-00-988-7602	25	35
5305-00-988-7603	25	24
5305-00-988-7605	25	23
5305-00-992-5837	25	21
5305-00-992-5847	25	41
5305-00-992-5854	25	36
5305-00-992-5907	25	50
5905-00-997-1199	24	22
5905-00-997-1208	24	17
5995-01-004-1892	1	40
5940-01-004-1893	2	46
5915-01-004-9318	1	29
5950-01-004-9327	23	4
5935-01-005-0024	10	3
5935-01-005-0024	13	1
5935-01-005-0024	21	1
5935-01-005-2631	20	5
5935-01-005-6444	27	9
5935-01-006-7791	31	13
5935-01-006-7791	32	2
5935-01-007-8810	18	3
5935-01-007-8810	19	2
5820-01-007-9393	2	78
5895-01-007-9409	36	20
5895-01-007-9484	36	18
5895-01-007-9485	36	7
5895-01-008-8164	36	4
5935-01-009-2960	6	3
5935-01-009-2960	7	3
5935-01-009-2960	9	3
5935-01-009-2960	12	1
5935-01-009-2960	15	3
5935-01-009-2960	19	1
5340-01-011-4122	29	9
6625-01-011-7246	26	4
5995-01-011-7414	2	88
5995-01-011-7415	2	47
5995-01-011-7416	2	48
5995-01-011-7417	2	33
5995-01-011-7419	2	50
5995-01-011-7420	1	59
5995-01-011-7421	1	58
5995-01-011-7422	2	49
5995-01-011-7423	1	9
5995-01-011-7424	1	10
5995-01-011-7425	1	11

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
5995-01-011-7426	1	39
5995-01-011-7427	2	45
5995-01-012-3635	1	24
5995-01-012-3636	2	74
5995-01-012-3637	1	33
5940-01-013-8289	14	3
5340-01-014-0087	2	84
5935-01-016-8610	22	7
5935-01-016-8610	29	2
5985-01-016-9590	25	49
5985-01-016-9599	26	46
5935-01-016-9620	24	4
5995-01-017-0257	25	38
5895-01-017-5770	25	47
5895-01-017-5775	25	33
5995-01-017-6408	25	46
3010-01-017-6417	25	22
5985-01-017-7097	2	36
5985-01-017-7102	25	28
5995-01-017-7125	2	85
3010-01-017-7150	25	11
5935-01-019-6557	39	2
5355-01-020-3111	26	35
5985-01-020-3400	3	19
5895-01-021-5915	2	19
5895-01-024-0394	3	6
5995-01-024-0424	3	4
5995-01-024-0425	3	3
5995-01-024-0426	3	2
5995-01-024-0427	3	1
5895-01-024-7862	36	15
5995-01-053-5919	1	47
5910-01-054-6159	31	6
5962-01-068-9585	31	42
5962-01-077-6116	31	40
5995-01-099-3472	1	36
5995-01-100-0236	2	75
5985-01-111-0480	26	21
6625-01-111-0506	26	17
5950-01-114-3143	36	17
5935-01-120-5144	4	2
5935-01-120-5144	5	1
5935-01-120-5144	6	1
5935-01-120-5144	7	1
5935-01-120-5144	8	1
5935-01-120-5144	9	1
5935-01-120-5144	10	1
5935-01-120-5144	13	3
5935-01-120-5144	15	1
5935-01-120-5144	18	1
5935-01-120-5144	20	3
5935-01-120-5144	21	3
5930-01-123-7898	28	12
5940-01-138-2996	16	2
5985-01-143-1951	1	62
5985-01-143-3125	25	31
5925-01-145-6306	26	14
5915-01-150-0757	1	16
5895-01-157-1971	24	20
5999-01-162-4684	24	10
5355-01-164-8618	24	9

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
00929	AJB09	5985-01-111-0480	26	21
09992	AR3128	5985-01-017-7102	25	28
09992	AR3129	5985-01-143-3125	25	31
09992	AR3130	5985-01-016-9590	25	49
81349	CK05BX101K	5910-00-893-6748	31	7
80063	CK05BX103K		23	2
81349	CK05BX103K	5910-00-111-4811	29	5
81349	CK05BX103K	5910-00-111-4811	31	10
81349	CK05BX104K	5910-00-113-7672	31	9
81349	CK06BX105K	5910-00-103-7748	31	4
81349	CK70AX471K	5910-00-852-7099	2	61
81349	CK70AX471K	5910-00-852-7099	22	12
81349	CMR04C3R0D0DR	5910-01-054-6159	31	6
25500	CP25-6-5	5999-00-956-4973	31	49
14830	CXH135		25	29
06229	CONO	5340-00-793-0543	1	67
52214	F345AA0228A02	5995-01-017-7125	2	85
81349	JANM38510/01309B EB		31	41
81349	JANM38510/10103B GB		31	39
81349	JAN1N5711	5961-00-232-3279	29	6
81349	JAN1N5711	5961-00-232-3279	31	2
81349	JAN1N647	5961-00-985-4900	31	1
81349	JAN1N647	5961-00-985-4900	32	1
81349	JAN2N2222A	5961-00-951-8757	31	14
81349	JAN2N3866	5961-00-227-9783	23	5
81349	JAN2N5431	5961-00-137-0813	31	15
81349	JM39016/9-005L		31	12
84830	LC032C6SS	5360-00-517-6225	26	40
27014	LM193AH/883B	5962-01-077-6116	31	40
34874	LNA700/1259	5895-00-014-7776	1	65
49956	LXM10	5895-01-017-5775	25	33
52335	MDC1056	5985-01-020-3400	3	19
18203	MIA06		25	25
97954	MIGS23MB	5935-01-006-7791	31	13
97954	MIGS23MB	5935-01-006-7791	32	2
97954	MIG23F	5935-01-005-2631	20	5
81349	MIL-1-23053/5	5970-00-052-3297	14	4
81349	MIL58805-56-1		2	67
96906	MS15795-801	5310-00-804-0141	25	3
96906	MS15795-802	5310-00-595-6761	2	6
96906	MS15795-802	5310-00-595-6761	3	7
96906	MS15795-802	5310-00-595-6761	26	32
96906	MS15795-803	5310-00-595-6211	1	17
96906	MS15795-803	5310-00-595-6211	2	44
96906	MS15795-803	5310-00-595-6211	22	2
96906	MS15795-803	5310-00-595-6211	24	6
96906	MS15795-803	5310-00-595-6211	25	5
96906	MS15795-803	5310-00-595-6211	27	3
96906	MS15795-803	5310-00-595-6211	30	8
96906	MS15795-803	5310-00-595-6211	31	45
96906	MS15795-803	5310-00-595-6211	32	13
96906	MS15795-805	5310-00-722-5998	1	6
96906	MS15795-805	5310-00-722-5998	2	40
96906	MS15795-805	5310-00-722-5998	3	11
96906	MS15795-805	5310-00-722-5998	11	2
96906	MS15795-805	5310-00-722-5998	25	7
96906	MS15795-805	5310-00-722-5998	26	19
96906	MS15795-805	5310-00-722-5998	30	3
96906	MS15795-805	5310-00-722-5998	33	9
96906	MS15795-807	5310-00-880-5978	1	13
96906	MS15795-807	5310-00-880-5978	2	68
96906	MS15795-807	5310-00-880-5978	3	22
96906	MS15795-807	5310-00-880-5978	26	37
96906	MS15795-807	5310-00-880-5978	33	6
96906	MS15795-814	5310-00-773-7618	26	24
96906	MS16624-5018-1	5365-00-432-3584	26	43
96906	MS16995-17	5305-00-992-5837	25	21
96906	MS16995-18	5305-00-992-5847	25	41
96906	MS16995-25	5305-00-992-5854	25	36
96906	MS16995-26	5305-00-988-7602	2	89
96906	MS16995-26	5305-00-988-7602	3	21
96906	MS16995-26	5305-00-988-7602	25	35
96906	MS16995-27	5305-00-988-7603	25	24
96906	MS16995-28	5305-00-992-5907	25	50
96906	MS16995-29	5305-00-988-7605	25	23
96906	MS18212-13	5305-00-833-8624	24	8
96906	MS18212-15	5305-00-833-8631	23	24
96906	MS20582C20		26	29
96906	MS21316-13	5305-00-837-9739	2	82
96906	MS24693C26	5305-00-958-2918	2	27
96906	MS24693C27	5305-00-066-7328	1	7
96906	MS24693C27	5305-00-066-7328	2	51
96906	MS24693C274	5305-00-043-0267	2	17
96906	MS24693C3	5305-00-225-6400	22	8
96906	MS24693C4	5305-00-056-9961	24	1
96906	MS24693C49	5305-00-068-5287	2	79
96906	MS24693C50	5305-00-079-5835	1	14
96906	MS24693C50	5305-00-079-5835	3	24
96906	MS24693C51	5305-00-088-9666	1	2
96906	MS24693C51	5305-00-088-9666	2	3
96906	MS24693C53	5305-00-088-9670	2	71
96906	MS25036-102	5940-00-204-8966	14	2
96906	MS25036-108	5940-00-143-4780	16	4
96906	MS25036-146	5940-00-804-0365	20	1
96906	MS25036-148	5940-01-013-8289	14	3
96906	MS25089-3C	5930-00-501-1749	26	16
96906	MS25237-327	6240-00-155-7836	26	7
96906	MS25281R13	5340-00-820-1789	2	83
96906	MS25281R14	5340-01-014-0087	2	84
96906	MS25281R4	5340-00-988-3210	25	37
96906	MS27183-10	5310-00-809-4058	27	13
96906	MS3114E12-3P	5935-00-845-2537	16	5
96906	MS3114E20-39S	5935-00-913-4462	17	1
96906	MS3367-4-9	5975-00-727-5153	1	52
96906	MS3367-4-9	5975-00-727-5153	14	1
96906	MS3367-4-9	5975-00-727-5153	16	6
96906	MS3367-4-9	5975-00-727-5153	17	4
96906	MS3367-4-9	5975-00-727-5153	20	2
96906	MS3367-4-9	5975-00-727-5153	37	3
96906	MS3367-4-9	5975-00-727-5153	39	3
96906	MS3368-5-9A		16	1
96906	MS3368-5-9A		17	3
96906	MS3368-5-9E	5975-00-482-3954	20	6
96906	MS35275-203	5305-00-922-8778	1	66
96906	MS35333-69	5310-00-543-4652	36	11
96906	MS35338-134	5310-00-928-2690	26	33
96906	MS35338-134	5310-00-928-2690	27	7
96906	MS35338-134	5310-00-928-2690	36	2

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
96906	MS35338-135	5310-00-933-8118	1	18
96906	MS35338-135	5310-00-933-8118	2	43
96906	MS35338-135	5310-00-933-8118	22	3
96906	MS35338-135	5310-00-933-8118	25	6
96906	MS35338-135	5310-00-933-8118	27	2
96906	MS35338-135	5310-00-933-8118	30	9
96906	MS35338-135	5310-00-933-8118	31	46
96906	MS35338-135	5310-00-933-8118	32	12
96906	MS35338-136	5310-00-929-6395	1	5
96906	MS35338-136	5310-00-929-6395	2	22
96906	MS35338-136	5310-00-929-6395	3	10
96906	MS35338-136	5310-00-929-6395	11	1
96906	MS35338-136	5310-00-929-6395	25	14
96906	MS35338-136	5310-00-929-6395	26	18
96906	MS35338-136	5310-00-929-6395	30	2
96906	MS35338-136	5310-00-929-6395	33	8
96906	MS35338-137	5310-00-933-8119	1	12
96906	MS35338-137	5310-00-933-8119	2	53
96906	MS35338-137	5310-00-933-8119	3	18
96906	MS35338-137	5310-00-933-8119	25	2
96906	MS35338-137	5310-00-933-8119	33	5
96906	MS35338-138	5310-00-933-8120	11	9
96906	MS35338-44	5310-00-582-5965	27	12
96906	MS35338-58	5310-00-209-1366	3	13
96906	MS35338-76		26	28
96906	MS35425-17	5310-00-982-5030	1	42
96906	MS35426-13	5310-00-720-8549	11	10
96906	MS35487-6		1	53
96906	MS35649-224	5310-00-938-2013	25	9
96906	MS35649-224	5310-00-938-2013	27	6
96906	MS35649-244	5310-00-934-9748	1	63
96906	MS35649-244	5310-00-934-9748	31	47
96906	MS35649-244	5310-00-934-9748	32	11
96906	MS35649-264	5310-00-934-9761	1	51
96906	MS35649-264	5310-00-934-9761	2	66
96906	MS35649-264	5310-00-934-9761	25	18
96906	MS51021-21	5305-00-531-0137	25	10
96906	MS51021-9	5305-00-800-7261	26	41
96906	MS51858-2	5310-00-827-9139	23	22
96906	MS51859-2	5310-00-716-5612	23	23
96906	MS51957-1	5305-00-054-5635	36	16
96906	MS51957-13	5305-00-054-5647	1	60
96906	MS51957-13	5305-00-054-5647	24	7
96906	MS51957-14	5305-00-054-5648	1	23
96906	MS51957-14	5305-00-054-5648	2	42
96906	MS51957-14	5305-00-054-5648	22	4
96906	MS51957-14	5305-00-054-5648	25	4
96906	MS51957-14	5305-00-054-5648	27	1
96906	MS51957-15	5305-00-054-5649	30	10
96906	MS51957-15	5305-00-054-5649	31	48
96906	MS51957-16	5305-00-054-5650	1	19
96906	MS51957-16	5305-00-054-5650	2	76
96906	MS51957-17	5305-00-054-5651	1	46
96906	MS51957-18	5305-00-054-5652	30	13
96906	MS51957-2	5305-00-054-5636	36	9
96906	MS51957-20	5305-00-054-5654	3	5
96906	MS51957-26	5305-00-054-6650	11	3
96906	MS51957-27	5305-00-054-6651	3	9
96906	MS51957-28	5305-00-054-6652	1	4
96906	MS51957-28	5305-00-054-6652	2	39
96906	MS51957-28	5305-00-054-6652	3	29
96906	MS51957-28	5305-00-054-6652	33	7
96906	MS51957-29	5305-00-054-6653	1	64
96906	MS51957-3	5305-00-054-5637	24	3
96906	MS51957-3	5305-00-054-5637	36	5
96906	MS51957-30	5305-00-054-6654	3	12
96906	MS51957-30	5305-00-054-6654	25	13
96906	MS51957-30	5305-00-054-6654	26	20
96906	MS51957-34	5305-00-054-6658	3	14
96906	MS51957-34	5305-00-054-6658	26	48
96906	MS51957-35	5305-00-054-6659	30	1
96906	MS51957-36	5305-00-054-6660	2	65
96906	MS51957-4	5305-00-054-5638	2	8
96906	MS51957-4	5305-00-054-5638	3	8
96906	MS51957-4	5305-00-054-5638	27	8
96906	MS51957-42	5305-00-054-6667	1	26
96906	MS51957-43	5305-00-054-6668	25	1
96906	MS51957-45	5305-00-054-6670	1	44
96906	MS51957-45	5305-00-054-6670	2	70
96906	MS51957-45	5305-00-054-6670	3	28
96906	MS51957-46	5305-00-054-6671	2	54
96906	MS51957-46	5305-00-054-6671	3	17
96906	MS51957-48	5305-00-054-6673	3	23
96906	MS51957-48	5305-00-054-6673	33	4
96906	MS51957-7	5305-00-054-5641	26	34
96906	MS51957-8	5305-00-054-5642	2	5
96906	MS51959-1	5305-00-766-2422	29	11
96906	MS51959-30	5305-00-719-5064	25	52
96906	MS51960-65	5305-00-071-1322	26	11
75382	MS600-6GEE		2	26
96906	MS90725-10	5305-00-071-2241	27	15
96906	MS91528-1F2B	5355-00-680-1357	26	5
96906	MS91528-2M2B	5355-00-985-6888	26	3
81349	M17/060-RG142	6145-00-823-2544	40	2
81349	M17/113-RG316	6145-00-918-9494	4	1
81349	M17/113-RG316	6145-00-918-9494	5	2
81349	M17/113-RG316	6145-00-918-9494	6	2
81349	M17/113-RG316	6145-00-918-9494	7	2
81349	M17/113-RG316	6145-00-918-9494	8	2
81349	M17/113-RG316	6145-00-918-9494	9	2
81349	M17/113-RG316	6145-00-918-9494	10	2
81349	M17/113-RG316	6145-00-918-9494	12	2
81349	M17/113-RG316	6145-00-918-9494	13	2
81349	M17/113-RG316	6145-00-918-9494	15	2
81349	M17/113-RG316	6145-00-918-9494	18	2
81349	M17/113-RG316	6145-00-918-9494	19	3
81349	M17/113-RG316	6145-00-918-9494	20	4
81349	M17/113-RG316	6145-00-918-9494	21	2
81349	M17/113-RG316	6145-00-918-9494	34	2
81349	M17/113-RG316	6145-00-918-9494	35	2
81349	M17/113-RG316	6145-00-918-9494	38	2
12598	M2158	6625-00-124-5269	2	59
81349	M39014-4-38		26	15
81349	M55339/03-00027	5935-00-904-4050	2	87
80205	NAS620C2	5310-00-043-4708	36	3
80205	NAS620C6	5310-00-773-7624	2	24
80205	NAS620C8	5310-00-069-5291	2	55
80205	NAS620C8	5310-00-069-5291	3	16
80205	NAS671C6	5310-00-616-8660	2	23
80205	NAS671C6		3	15

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
70318	N01		36	14
32252	OD3-20-136		2	38
81349	RCR05G470JS	5905-00-402-7049	23	18
81349	RCR07G100JS	5905-00-107-0656	23	12
81349	RCR07G101JS	5905-00-141-1183	31	19
81349	RCR07G101JS	5905-00-141-1183	32	6
81349	RCR07G102JS	5905-00-110-7620	31	17
81349	RCR07G102JS	5905-00-110-7620	32	5
81349	RCR07G103JS	5905-00-106-3666	23	19
81349	RCR07G103JS	5905-00-106-3666	32	9
81349	RCR07G104JS	5905-00-110-0388	29	4
81349	RCR07G106JS	5905-00-121-9919	31	36
81349	RCR07G114JS	5905-00-435-6414	32	7
81349	RCR07G132JS	5905-00-104-8362	31	31
81349	RCR07G181JS	5905-00-141-0742	23	17
81349	RCR07G201JS	5905-00-111-4845	23	9
81349	RCR07G220JS	5905-00-106-3668	31	34
81349	RCR07G222JS	5905-00-105-7764	31	20
81349	RCR07G223JS	5905-00-116-8556	31	30
81349	RCR07G240JS	5905-00-442-9356	23	8
81349	RCR07G241JS	5905-00-435-1718	31	25
81349	RCR07G242JS	5905-00-136-8406	31	32
81349	RCR07G271JS	5905-00-119-3503	23	11
81349	RCR07G301JS	5905-00-111-4750	31	23
81349	RCR07G334JS	5905-00-485-4545	31	37
81349	RCR07G362JS	5905-00-104-8369	31	24
81349	RCR07G430JS	5905-00-115-2223	23	7
81349	RCR07G470JS	5905-00-104-8368	23	14
81349	RCR07G471JS	5905-00-120-9154	31	35
81349	RCR07G472JS	5905-00-114-0711	31	22
81349	RCR07G473JS	5905-00-141-0717	31	21
81349	RCR07G474JS	5905-00-105-7767	32	4
81349	RCR07G5R6JS	5905-00-121-9863	24	27
81349	RCR07G5R6JS	5905-00-121-9863	28	2
81349	RCR07G510JS	5905-00-106-1249	29	7
81349	RCR07G511JS	5905-00-116-2394	32	8
81349	RCR07G512JS	5905-00-111-1679	31	16
81349	RCR07G560JS	5905-00-133-0440	23	15
81349	RCR07G623JS	5905-00-104-8360	31	33
81349	RCR07G821JS	5905-00-119-8768	31	26
81349	RCR20G102JS	5905-00-110-0196	23	13
81349	RCR20G102JS	5905-00-110-0196	26	49
81349	RCR20G511JS	5905-00-104-8349	31	18
81349	RCR20G911JS	5905-00-106-1274	23	10
81349	RCR32G391JS	5905-00-141-1149	23	16
81349	RCR42G300JS	5905-00-147-0386	23	20
81349	RJ12CY103	5905-00-483-4284	32	3
81349	RJ26FX501	5905-00-452-0710	31	27
81349	RNC55K4320FS	5905-00-758-4802	24	21
81349	RNC55K52R3FS	5905-00-138-4918	24	12
81349	RNC55K8660FS	5905-00-432-9157	24	26
81349	RNR55C1003FS	5905-00-240-2012	31	29
81349	RNR55C1103FS	5905-00-264-4066	31	29
81349	RNR55C1213FS	5905-00-476-7962	31	29
81349	RNR55C1333FS	5905-00-456-3852	31	29
81349	RNR55C1403FS	5905-00-456-3874	31	29
81349	RNR55C1543FS	5905-00-430-3626	31	29
81349	RNR55C1623FS	5905-00-456-3875	31	29
81349	RNR55C1693FS	5905-00-456-3887	31	29
81349	RNR55C2211FS	5905-00-419-5258	31	28
81349	RN55D11R5F	5905-00-997-1199	24	22
81349	RN55D1150F	5905-00-940-7163	24	11
81349	RN55D2110F		24	16
81349	RN55D23R7F	5905-00-997-1208	24	17
81349	RN60D11R5F		28	4
81349	RN60D1150F	5905-00-763-8282	28	9
81349	RN60D1500F	5905-00-984-7685	28	7
81349	RN60D2210F	5905-00-984-1463	28	5
81349	RN60D23R7F	5905-00-764-4108	28	6
81349	RN60D37R4F	5905-00-087-8405	28	8
81349	RN60D4320F	5905-00-952-6824	28	3
81349	RN60D52R3F	5905-00-763-9311	28	10
81349	RN60D8660F	5905-00-067-3244	28	1
18324	SA78MHV05CU		31	43
28916	SC1120		25	30
90201	SC628	6350-00-102-4210	26	10
81349	SE13XC04	5940-00-913-9383	22	11
18324	SE556-1F/883B	5962-01-068-9585	31	42
80063	SM-A-753271	5895-00-124-8754	26	31
80063	SM-A-753745	5935-01-005-0024	10	3
80063	SM-A-753745	5935-01-005-0024	21	1
80063	SM-A-754420	5895-01-024-0394	3	6
80063	SM-B-7530909		2	60
80063	SM-B-753285		2	16
80063	SM-B-753448		27	14
80063	SM-B-753449		27	4
80063	SM-B-753464-2		26	25
80063	SM-B-753507-2		26	2
80063	SM-B-753623	5340-01-011-4122	29	9
80063	SM-B-753624		29	10
80063	SM-B-753626		25	43
80063	SM-B-753627		25	40
80063	SM-B-753646		30	4
80063	SM-B-753676		2	69
80063	SM-B-753680		26	47
80063	SM-B-753682		2	41
80063	SM-B-753690-1	5925-01-145-6306	26	14
80063	SM-B-753706-1	5935-01-016-9620	24	4
80063	SM-B-753729		25	26
80063	SM-B-753733		1	61
80063	SM-B-753735		30	12
80063	SM-B-753765		1	15
80063	SM-B-753818	5355-01-164-8618	24	9
80063	SM-B-753819-1		2	4
80063	SM-B-753823	5895-01-017-5770	25	47
80063	SM-B-753836		25	42
80063	SM-B-753851		1	43
80063	SM-B-753873		25	16
80063	SM-B-753875		2	86
80063	SM-B-753877	3010-01-017-7150	25	11
80063	SM-B-753908		2	62
80063	SM-B-753910		1	30
80063	SM-B-753911		1	28
80063	SM-B-753912		1	49
80063	SM-B-753913	5995-01-099-3472	1	36
80063	SM-B-753923	5995-01-011-7427	2	45
80063	SM-B-753936	5995-01-100-0236	2	75
80063	SM-B-753937		11	11
80063	SM-B-753938	5995-01-004-1892	1	40

FSCM	PART NUMBER	NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
80063	SM-B-753939		1	41
80063	SM-B-753941		11	7
80063	SM-B-753944		1	54
80063	SM-B-754047		25	15
80063	SM-B-754048		26	26
80063	SM-B-754099	3010-01-017-6417	25	22
80063	SM-B-754355		2	10
80063	SM-B-754356		2	29
80063	SM-B-754385		2	30
80063	SM-B-754430		26	39
80063	SM-B-754440	5895-01-024-7862	36	15
80063	SM-B-754545	5995-01-053-5919	1	47
80063	SM-B-754546		3	27
80063	SM-B-952492		31	44
80063	SM-C-753212		22	5
80063	SM-C-753319	5985-01-017-7097	2	36
80063	SM-C-753444	5985-01-016-9599	26	46
80063	SM-C-753446		27	10
80063	SM-C-753479		26	30
80063	SM-C-753494		2	9
80063	SM-C-753497	5895-01-021-5915	2	19
80063	SM-C-753552		30	7
80063	SM-C-753575	5895-00-124-5105	1	56
80063	SM-C-753579		22	1
80063	SM-C-753597		29	1
80063	SM-C-753598		29	3
80063	SM-C-753599		29	8
80063	SM-C-753643		25	51
80063	SM-C-753647		30	6
80063	SM-C-753648		25	48
80063	SM-C-753654		2	58
80063	SM-C-753658		2	14
80063	SM-C-753660		11	5
80063	SM-C-753663		11	4
80063	SM-C-753664		2	73
80063	SM-C-753669		1	45
80063	SM-C-753678		33	1
80063	SM-C-753685		2	28
80063	SM-C-753704-1	5999-01-162-4684	24	10
80063	SM-C-753704-2		24	25
80063	SM-C-753704-3	5895-01-157-1971	24	20
80063	SM-C-753704-4		24	15
80063	SM-C-753721	5895-00-124-5257	2	52
80063	SM-C-753728		25	54
80063	SM-C-753730		25	8
80063	SM-C-753763		3	30
80063	SM-C-753813	5985-00-124-8763	25	34
80063	SM-C-753838-1		24	14
80063	SM-C-753838-2		24	29
80063	SM-C-753838-3		24	24
80063	SM-C-753838-4		24	19
80063	SM-C-753883		25	20
80063	SM-C-753915	5995-01-011-7425	1	11
80063	SM-C-753916	5995-01-011-7424	1	10
80063	SM-C-753917	5995-01-011-7423	1	9
80063	SM-C-753918	5995-01-011-7426	1	39
80063	SM-C-753919	5995-01-017-6408	25	46
80063	SM-C-753922	5995-01-011-7422	2	49
80063	SM-C-753929	5995-01-011-7421	1	58
80063	SM-C-753930	5995-01-011-7420	1	59
80063	SM-C-753945	5995-01-011-7419	2	50
80063	SM-C-754049		25	19
80063	SM-C-754051		25	12
80063	SM-C-754317		2	77
80063	SM-C-754329-2		26	44
80063	SM-C-754333-4		2	20
80063	SM-C-754347		1	37
80063	SM-C-754350		26	42
80063	SM-C-754357	5995-01-012-3635	1	24
80063	SM-C-754358	5995-01-012-3637	1	33
80063	SM-C-754361		36	19
80063	SM-C-754386		3	31
80063	SM-C-754415	5995-01-024-0424	3	4
80063	SM-C-754416	5995-01-024-0425	3	3
80063	SM-C-754418	5995-01-024-0426	3	2
80063	SM-C-754453		26	38
80063	SM-C-754495	5995-01-012-3636	2	74
80063	SM-C-754541		3	25
80063	SM-C-754543		1	48
80063	SM-D-753262-1		1	3
80063	SM-D-753263-1		2	18
80063	SM-D-753436	5999-00-124-5264	2	64
80063	SM-D-753437		32	10
80063	SM-D-753443		27	5
80063	SM-D-753445		28	11
80063	SM-D-753631		25	55
80063	SM-D-753637		25	56
80063	SM-D-753644		33	3
80063	SM-D-753649		2	31
80063	SM-D-753650		2	80
80063	SM-D-753667		1	32
80063	SM-D-753679		1	1
80063	SM-D-753689		2	81
80063	SM-D-753692		2	72
80063	SM-D-753699		24	5
80063	SM-D-753702		1	27
80063	SM-D-753719	5985-00-124-5247	2	2
80063	SM-D-753839		24	30
80063	SM-D-753841		24	32
80063	SM-D-753869		11	6
80063	SM-D-753914		2	35
80063	SM-D-753920		25	39
80063	SM-D-753921	5995-01-017-0257	25	38
80063	SM-D-753924	5995-01-011-7417	2	33
80063	SM-D-753931	5995-01-011-7416	2	48
80063	SM-D-753932	5995-01-011-7415	2	47
80063	SM-D-753943	5995-01-011-7414	2	88
80063	SM-D-754-367-1		2	11
80063	SM-D-754117		1	31
80063	SM-D-754149		1	8
80063	SM-D-754268		36	10
80063	SM-D-754269		36	6
80063	SM-D-754272		36	8
80063	SM-D-754292		1	21
80063	SM-D-754298-1	5895-01-007-9409	36	20
80063	SM-D-754301	5895-01-007-9484	36	18
80063	SM-D-754304-2	5895-01-008-8164	36	4
80063	SM-D-754370		2	13
80063	SM-D-754371		2	21
80063	SM-D-754372	5895-00-014-7845	2	12

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
80063	SM-D-754391-1	5895-01-007-9485	36	7
80063	SM-D-754419	5995-01-024-0427	3	1
80063	SM-D-754486		36	21
80063	SM-D-754489-1		3	26
80063	SM-D-952556-1		2	63
80063	SM-D-952557-1		31	38
80063	SM-E-753687		2	15
80063	SM-E-753844		2	1
80063	SM-F-753859		2	7
80063	SM-F-753867		2	57
80063	SM-F-754491		1	20
80063	SM-F-754540		1	57
80063	SMC754542		3	33
80063	SMF754541		3	34
34303	SWT3C35V10J		31	11
34303	SWT4C10V100J		31	8
00929	TAE30	5940-01-004-1893	2	46
34874	WA700-2276		3	20
00141	Z2-3	5365-00-298-6564	26	23
32252	0D3-10-137	5985-00-124-5119	1	50
97987	1-4-5		2	56
70318	1-64UNC2AX1-4		36	22
70318	1-64UNC2B		36	13
14830	1CXL16	5985-01-143-1951	1	62
18565	10-00-2230-1224		2	37
18565	10-00-2232-1224		26	27
01456	10-36516	5985-00-341-5211	2	90
99813	101357	5355-01-020-3111	26	35
31336	1090F202-2NP		26	50
01456	112AC189		25	45
31196	1130000031		30	5
31196	11300000407		30	11
31196	1130000041	5915-01-150-0757	1	16
31196	1130000045	5985-00-124-4795	2	32
31196	1130000053		25	53
31196	1130000054		25	44
31196	1130000097	6130-00-124-4986	33	2
31196	1130000200	5930-00-626-2917	26	9
31196	1130000414		1	38
31196	1130000796		3	32
31196	1130001083		25	27
11396	1130001331		25	32
02660	133-012-09	5935-01-019-6557	39	2
00929	155A44-406		26	1
70318	2-56UNC2AX13-16		36	1
80131	2N5943	5961-00-153-3578	23	6
26805	2031-7188-02	5935-01-009-2960	6	3
26805	2031-7188-02	5935-01-009-2960	7	3
26805	2031-7188-02	5935-01-009-2960	9	3
26805	2031-7188-02	5935-01-009-2960	12	1
26805	2031-7188-02	5935-01-009-2960	15	3
26805	2031-7188-02	5935-01-009-2960	19	1
26805	2034-7188-02	5935-01-005-0024	13	1
26805	2037-5008-02	5935-01-120-5144	4	2
26805	2037-5008-02	5935-01-120-5144	5	1
26805	2037-5008-02	5935-01-120-5144	6	1
26805	2037-5008-02	5935-01-120-5144	7	1
26805	2037-5008-02	5935-01-120-5144	8	1
26805	2037-5008-02	5935-01-120-5144	9	1
26805	2037-5008-02	5935-01-120-5144	10	1
26805	2037-5008-02	5935-01-120-5144	13	3
26805	2037-5008-02	5935-01-120-5144	15	1
26805	2037-5008-02	5935-01-120-5144	18	1
26805	2037-5008-02	5935-01-120-5144	20	3
26805	2037-5008-02	5935-01-120-5144	21	3
95542	2038-8009	5310-00-595-6772	11	8
26805	2056-0000-02	5935-01-016-8610	22	7
26805	2056-0000-02	5935-01-016-8610	29	2
26805	2056-6200-02	5915-01-004-9318	1	29
26805	2084-0000-02	5935-00-337-6770	1	34
31196	2090000629		22	9
26805	2098-5065	5120-00-113-0042	41	1
71279	2111-2-12	5340-00-840-0114	26	12
02660	220-P02	5999-00-062-1608	37	1
02660	220-P02	5999-00-062-1608	39	1
02660	223-1209	5935-00-114-8767	37	2
31196	2350000998	5950-01-004-9327	23	4
31196	2350000999		23	21
78189	2440-20-03	5940-00-959-4487	26	51
79963	263	5940-00-581-7899	36	12
95077	2910-6001		40	1
95077	2913-6001	5935-00-470-8995	34	3
95077	2913-6001	5935-00-470-8995	35	3
95077	2913-6001	5935-00-470-8995	38	3
95077	2943-6001P		34	1
95077	2943-6001P		35	1
95077	2943-6001P		38	1
26805	2950-6156	5935-01-005-6444	27	9
71279	2970-2	5940-00-350-4654	24	18
71279	2970-2	5940-00-350-4654	24	23
71279	2970-2	5940-00-350-4654	24	28
29940	3CCF23E		1	22
26805	3034-7188-02	5935-01-007-8810	18	3
26805	3034-7188-02	5935-01-007-8810	19	2
31196	3060000628		23	25
31196	3090000788		24	2
04901	312		26	6
00779	323011	5940-00-983-7091	20	7
00779	328281	5940-01-138-2996	16	2
31196	3350000630		22	10
31196	3350000631		22	13
31196	3350000881		22	6
00779	34541	5940-00-636-5593	16	3
34303	35V22P0RM20PCT		31	5
34303	35V47P0RM10PCT		31	3
75382	37TB6		2	25
04901	42A-S3-1-2	5820-01-007-9393	2	78
04901	42AS3-3	6625-01-011-7246	26	4
04901	42AS3-5	5905-00-630-6263	26	22
04901	42AS3-6		2	34
29964	43D10		25	17
71279	450-3388-01-03	5935-00-191-5434	24	31
71279	460-2970-02	5940-00-350-4654	24	13
76493	4624	5950-00-645-3771	1	25
72962	52NU-040	5310-00-050-3275	27	11
82423	53453	5310-00-298-8157	1	35
72982	538-000B7-0-25	5910-00-944-3561	23	1
72982	538-001D9-0-35	5910-00-903-3714	23	3
50392	58FK832	5310-00-413-6059	1	55
70318	6-32X3-4		26	36

FSCM	PART NUMBER	NATIONAL STOCK NUMBER	FIGURE NO.	ITEM NO.
95238	600-4PCGDF7-50		17	2
77221	621-16815	6625-01-111-0506	26	17
37695	657867-2	5950-01-114-3143	36	17
09353	7201SH3CQ1	5930-01-123-7898	28	12
72619	812-1030-0971-50 6	6210-00-840-0850	26	8
72619	812-1030-0975-50		26	13
06540	9228SS171-7	5365-00-008-2065	26	45
06540	9755-SS-D832		3	35

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703-5007

DATE SENT
10 July 1975

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5840-340-20P	23 Jan 78	Radar Set AN/PRC-76

BE EXACT. PIN-POINT WHERE IT IS

PAGE NO	PARAGRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
SSG I. M. DeSpirit of 999-1776

SIGN HERE
I. M. DeSpirit

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

SAMPLE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, NJ 07703-5007

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5895-833-34P-2	18 Nov 1985	Converter, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)

BE EXACT . . . PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

P S --IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics
Command and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, NJ 07703-5007

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5895-833-34P-2	18 Nov 1985	Converter, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)

BE EXACT . . . PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 **2028-2**

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics
Command and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, NJ 07703-5007

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG **WITH THIS PUBLICATION?**

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5895-833-34P-2	18 Nov 1985	Converter, Frequency, Electronic CV-3084/MSC-46(V) and CV-3084A/MSC-46(V)

BE EXACT . . . PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 **2028-2**

PREVIOUS EDITIONS ARE OBSOLETE.

P S --IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

Commander
US Army Communications-Electronics
Command and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, NJ 07703-5007

By Order of the Secretaries of the Army, the Navy and the Air Force:

Official:

JOHN A WICKHAM, JR.
General, United States Army
Chief of Staff

MILDRED E. HEDBERG
Brigadier General, United States Army
The Adjutant General

G.B. SCHICK, JR.
Rear Admiral, United States Navy
Commander, Naval Electronic
Systems Command

Official:

EARL T. O'LOUGHLIN
General, USAF, Commander, Air Force
Logistics Command

CHARLES A. GABRIEL
General, USAF
Chief of Staff

DISTRIBUTION:
To be distributed in accordance with DA Form 12-51 literature requirements for CV-3084/MSC-46(V).

☆ U.S. GOVERNMENT PRINTING OFFICE: 1986—605-042/20185